





	Item	Description
A	AD Board	eDP / HDMI+DP / USB A / Audio / DC 12V
B	Signal Cable	eDP Cable L=300~350mm
C	OSD Key Board	5Key : Power / Menu / Adj- / Adj+ / Exit
D	OSD Key Cable	OSD Key Cable L=300mm

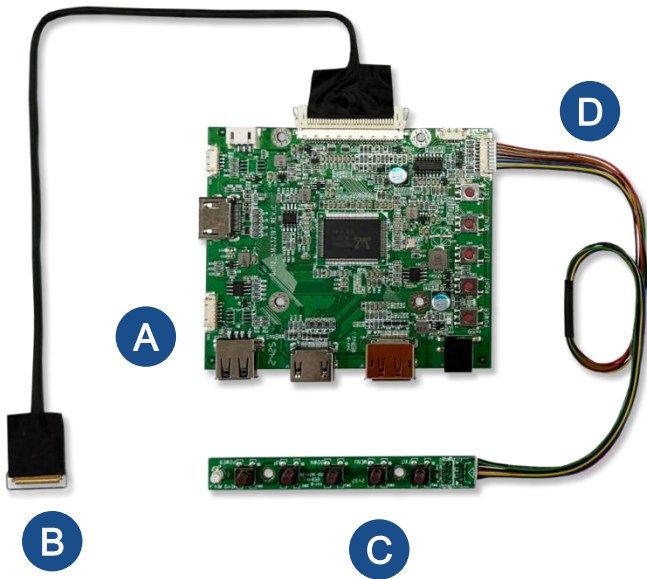

Specification

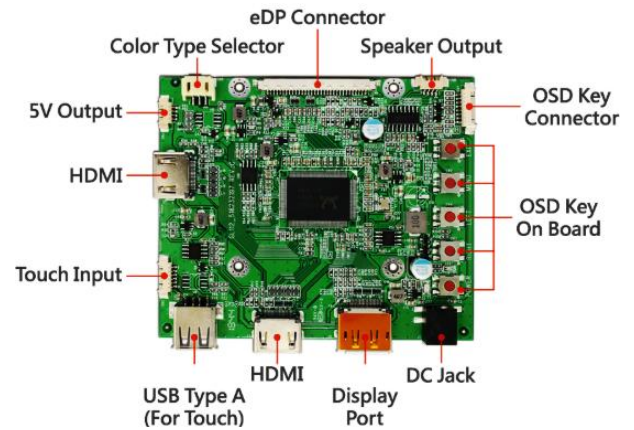

Model	KAD0112XX	
AD Board	Support Panel Interface	1 / 2 lane eDP
	Maximum Resolution	Up to 1920x1200 16.7M colors
	Vertical Refresh Rate	VESA Standard up to 60Hz
	Input Source	HDMI*2 / Display port / Audio IN
	Input Source	USB Type A for Touch (bypass)
	Dot Clock Maximum	165MHz
	User Controls	Power / menu / adj- / adj+ / exit
	Voltage for LCD Panel	3.3V
	Voltage for Power Input	DC 12V / 1A~4A
	Audio Output	1.6W+1.6W at 8 ohm speaker
	Power Consumption (OP.)	12V / 0.1233A / 1.48W
	Power Consumption (PSM.)	12V / 0.0217A / 0.26W
OSD Key Board	Outline Dimension (mm)	100.0 x 85.0 x 9.5 (max.)
	OSD Key Switch (on board)	Power / menu / adj- / adj+ / exit
Cables	LED Color (on board)	2 color LED Green/Orange
	LED Color	2 color LED Green / Orange
Others	Outline Dimension (mm)	92.0 x 11.0 x 7(top) / 5(bottom)
	Signal Cable	L = 300~350 mm
Others	OSD Key Board Cable	L = 300mm
	MTBF	200,000hrs
Others	Operating Temperature	-30 ~ 85 °C
	Storage Temperature	-40 ~ 85 °C
	OS	Android, Linux, MacOS, Windows
	Safety regulations	UL

2D Drawing

