



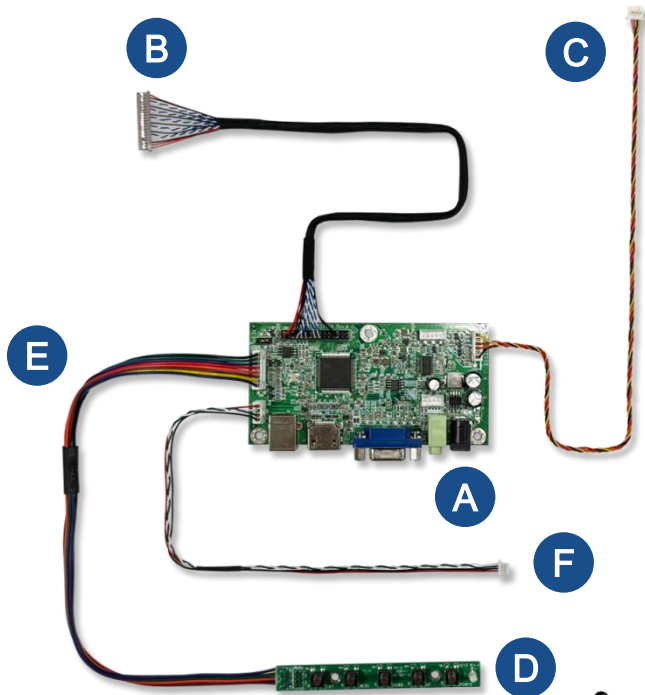

Item		Description
A	AD Board	LVDS / VGA+HDMI / USB B / Audio / DC 12V
B	Signal Cable	LVDS Cable L=300~350mm
C	BL Cable	Backlight Cable L=300~350mm
D	OSD Key Board	5Key : Power / Menu / Adj+ / Adj- / Exit
E	OSD Key Cable	OSD Key Cable L=300mm
F	Bypass Cable	Touch USB Bypass Cable L=250mm

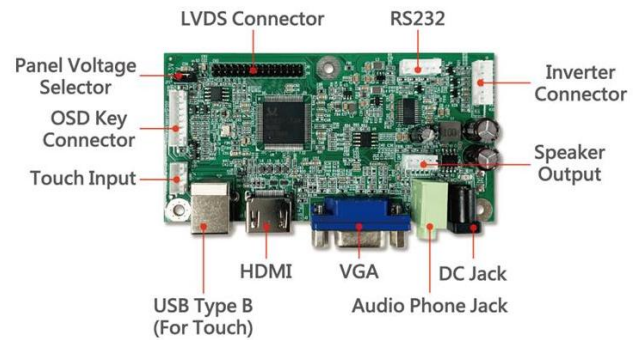

Specification

Model	KADTW0AXX	
AD Board	Support Panel Interface	LVDS Single / Dual Channel
	Maximum Resolution	Up to 1920x1200 16.7M colors
	Vertical Refresh Rate	VESA Standard up to 60Hz.
	Input Source	VGA / DVI-D / Audio IN
	Input Source	USB Type B for Touch (bypass)
	Dot Clock Maximum	165MHz
	User Controls	Power / menu / adj- / adj+ / exit
	Voltage for LCD Panel	3.3V , 5V
	Voltage for Power Input	DC 12V / 1A~5A
	Audio Output	1.4W+1.4W at 8 ohm speaker
	Power Consumption (OP.)	12V / 0.0533A / 0.64W
	Power Consumption (PSM.)	12V / 0.01A / 0.12W
	Outline Dimension (mm)	110.0 x 56.0 x 14.5 (max.)
	LED Color	2 color LED Green/Orange
OSD Key Board	Outline Dimension (mm)	92.0 x 11.0 x 7(top)/5(bottom)
	Signal Cable	L = 300~350 mm
Cables	Backlight Cable	L = 300~350mm
	OSD Key Board Cable	L = 300mm
	Touch USB Bypass Cable	L = 250~300mm
	MTBF	100,000hrs
Others	Operating Temperature	-30 ~ 85 °C
	Storage Temperature	-40 ~ 85 °C
	OS	Android, Linux, MacOS, Windows
	Safety regulations	UL

2D Drawing

