

F065PET-T81

(10-points)(Air Bonding)



Features

- 6.5" PCAP Multi-Touch Display
- 640 x 480, 800 cd/m², LVDS Interface
- Supports 10-points touch
- High transparency and excellent display clarity
- Fast response and high sensitivity




Image above for reference only

MADE IN TAIWAN

Specification

Model	F065PET-T81	
TFT LCD	Inch	6.5"
	Resolution	640 x 480 (VGA)
	Signal Interface	LVDS
	Brightness	800 cd/m ² (Typ.)
	Viewing Angle	89/89/89/89
	Contrast	1,000 : 1 (Typ.)
	B/L Life Time (Hr)	70K (min)
	Backlight Driver	Built-in
PCAP Touch	Structure (Glass Thickness)	G/G (2.7 mm)
	Touch Control Board	EXC80W462838SMAG
	FPC Type	COB
	Interface	USB / I2C
	Surface Treatment	Haze <4%
	Transparency	90% ±3%
	Surface Hardness	≥7H
	Allow Touch Points	≤10 Points
Touch Display	Input Method	Finger, Gloved, Stylus
	Bonding Type	Air Bonding
	View Area (mm)	132.88 x 99.76
	Outline Dimension (mm)	153 x 118 x 14.24
	Weight	0.3 kg (Typ.)
	Operating Temperature	-20 ~ 70 °C
	Storage Temperature	-30 ~ 80 °C
	OS	Android, Linux, MacOS, Windows

Dimension

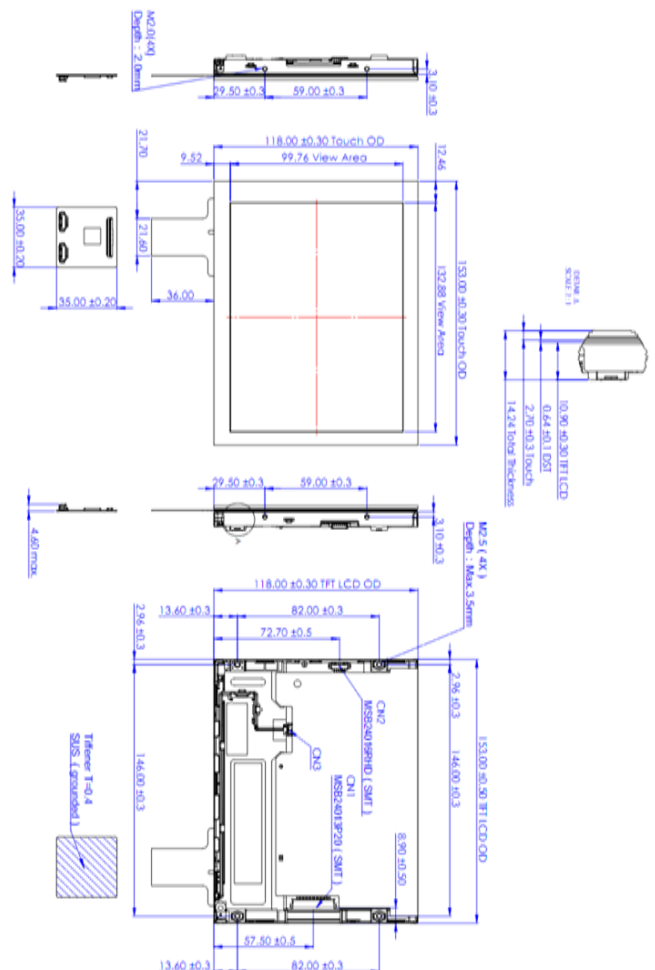

Packing Volume Reference

Packaging	Sample			Full Box	1 Pallet
QTY	1 pc	2 pcs	3 pcs	50 pcs	-
N.W. (Kg)	0.300	0.600	0.900	15.000	-
G.W. (Kg)	0.850	1.150	1.450	17.100	-
Dimension (mm)	340 x 250 x 170	340 x 250 x 170	340 x 250 x 170	500 x 365 x 280	-