

F070PET-TA1

(10-points)(Air Bonding)



Features

- **7.0" PCAP Multi-Touch Display**
- **800 x 480, 1000 cd/m², LVDS Interface**
- **Supports 10-points touch**
- **High transparency and excellent display clarity**
- **Fast response and high sensitivity**




Image above for reference only

MADE IN TAIWAN

Specification

Model	F070PET-TA1	
TFT LCD	Inch	7"
	Resolution	800 x 480 (WVGA)
	Signal Interface	LVDS
	Brightness	1000 cd/m ² (Typ.)
	Viewing Angle	89/89/89/89
	Contrast	1,000 : 1 (Typ.)
	B/L Life Time (Hr)	50K (min)
	Backlight Driver	Built-in
PCAP Touch	Structure (Glass Thickness)	G/G (1.77 mm)
	Touch Control IC	EETI, EXC80W32
	FPC Type	COF
	Interface	USB / I2C
	Surface Treatment	Clear
	Transparency	≥85%
	Surface Hardness	≥6H
	Allow Touch Points	≤10 Points
Touch Display	Input Method	Finger, Gloved, Stylus
	Bonding Type	Air Bonding
	View Area (mm)	153.00 x 92.04
	Outline Dimension (mm)	170.00 x 110.00 x 10.62
	Weight	0.25 kg (Typ.)
	Operating Temperature	-20 ~ 70 °C
	Storage Temperature	-30 ~ 80 °C
	OS	Android, Linux, MacOS, Windows

Dimension

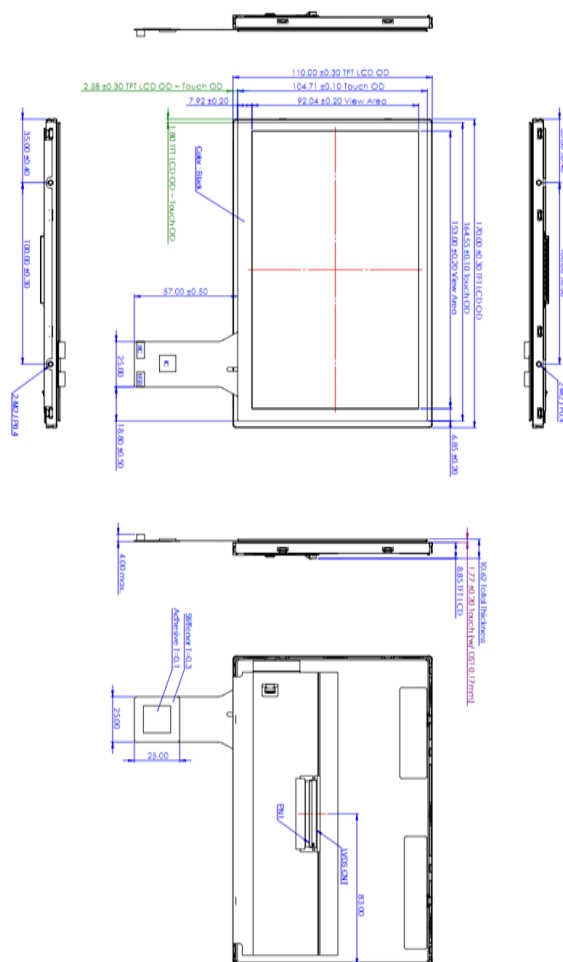

Packing Volume Reference

Packaging	Sample			Full Box	1 Pallet
QTY	1 pc	2 pcs	3 pcs	50 pcs	-
N.W. (Kg)	0.25	0.50	0.75	12.50	-
G.W. (Kg)	0.80	1.05	1.30	14.60	-
Dimension (mm)	340 x 250 x 170	340 x 250 x 170	340 x 250 x 170	500 x 365 x 280	-