

F101PET-Z05

(10-points)(Air Bonding)



Features

- **10.1" PCAP Multi-Touch Display**
- **1920 x 1200, 380 cd/m², LVDS Interface**
- **Supports 10-points touch**
- **High transparency and excellent display clarity**
- **Fast response and high sensitivity**




Image above for reference only

MADE IN TAIWAN

Specification

Model	F101PET-Z05	
TFT LCD	Inch	10.1"
	Resolution	1920 x 1200 (WUXGA)
	Signal Interface	eDP
	Brightness	380 cd/m ² (Typ.)
	Viewing Angle	89/89/89/89
	Contrast	800 : 1 (Typ.)
	B/L Life Time (Hr)	20K (Min.)
	Backlight Driver	Built-in
PCAP Touch	Structure (Glass Thickness)	G/G (2.05 mm)
	Touch Control IC	EETI, EXC80W46
	FPC Type	COF
	Interface	USB / I2C
	Surface Treatment	Clear
	Transparency	85 ±3%
	Surface Hardness	≥6H
	Allow Touch Points	≤10 Points
	Input Method	Finger, Gloved, Stylus
Touch Display	Bonding Type	Air Bonding
	View Area (mm)	217.56 x 136.20
	Outline Dimension (mm)	247.76 x 166.40 x 7.39 (Typ.)
	Weight	0.350 Kg (Typ.)
	Operating Temperature	-10 ~ 60 °C
	Storage Temperature	-20 ~ 60 °C
	OS	Android, Linux, MacOS, Windows

Dimension

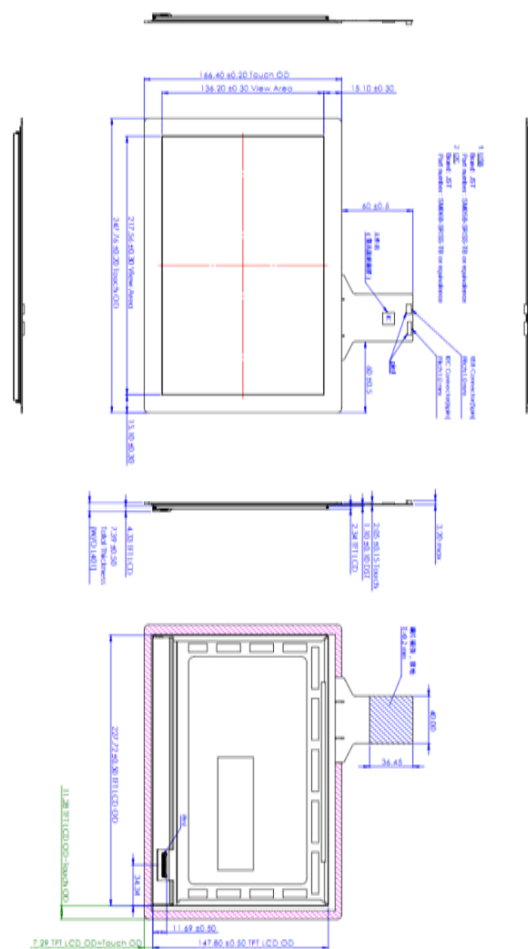

Packing Volume Reference

Packaging	Sample			Full Box	1 Pallet
QTY	1 pc	2 pcs	3 pcs	30 pcs	-
N.W. (Kg)	0.350	0.700	1.050	10.500	-
G.W. (Kg)	0.900	1.25	1.600	12.300	-
Dimension (mm)	340 x 250 x 170	340 x 250 x 170	340 x 250 x 170	440 x 380 x 340	-