



F104PET-TA1

(10-points)(Air Bonding)

Features

- 10.4" PCAP Multi-Touch Display
- 1024 x 768, 1000 cd/m², LVDS Interface
- Supports 10-points touch
- High transparency and excellent display clarity
- Fast response and high sensitivity




Image above for reference only

MADE IN TAIWAN

Specification

Model	F104PET-TA1	
TFT LCD	Inch	10.4"
	Resolution	1024 x 768 (XGA)
	Signal Interface	LVDS
	Brightness	1000 cd/m ² (Typ.)
	Viewing Angle	88/88/88/88
	Contrast	1000 : 1 (Typ.)
	B/L Life Time (Hr)	50K (Min.)
	Backlight Driver	Built-in
PCAP Touch	Structure (Glass Thickness)	G/G (2.40 mm)
	Touch Control Board	B000PDU-E03
	FPC Type	COB
	Interface	USB / I2C
	Surface Treatment	Clear
	Transparency	≥ 85%
	Surface Hardness	≥ 6H
	Allow Touch Points	≤ 10 Points
Touch Display	Input Method	Finger, Gloved, Stylus
	Bonding Type	Air Bonding
	View Area (mm)	212.20 x 159.40
	Outline Dimension (mm)	225.50 x 176.30 x 11.74
	Weight	0.6 Kg (Typ.)
	Operating Temperature	-20 ~ 70 °C
	Storage Temperature	-30 ~ 80 °C
	OS	Android, Linux, MacOS, Windows

Dimension

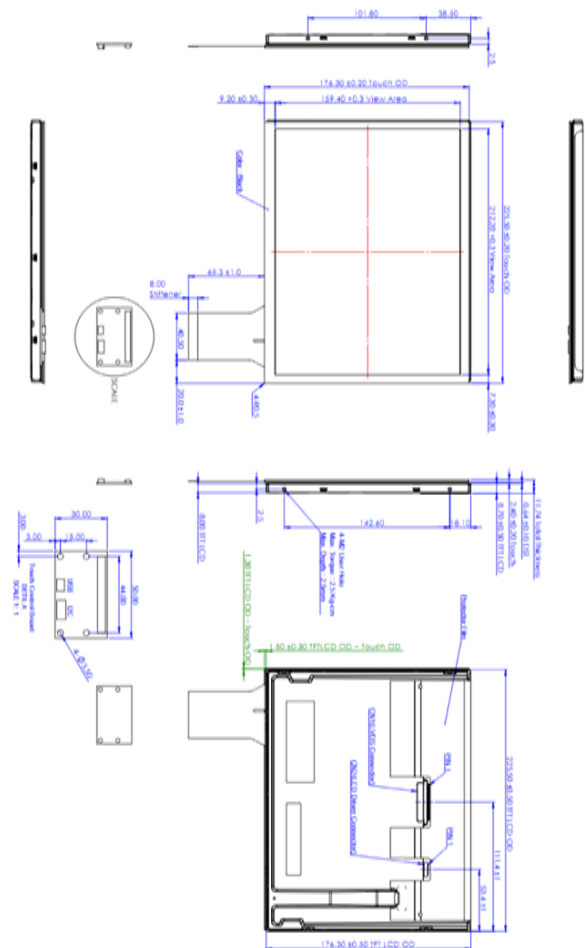

Packing Volume Reference

Packaging	Sample			Full Box	1 Pallet
QTY	1 pc	2 pcs	3 pcs	20 pcs	-
N.W. (Kg)	0.60	1.20	1.80	12.000	-
G.W. (Kg)	1.150	2.05	2.35	13.800	-
Dimension (mm)	340 x 250 x 170	340 x 250 x 170	340 x 250 x 170	440 x 380 x 340	-