

F116PET-T22

(10-points)(Air Bonding)



Features

- **11.6" PCAP Multi-Touch Display**
- **1920 x 1080, 300 cd/m², eDP Interface**
- **Supports 10-points touch**
- **High transparency and excellent display clarity**
- **Fast response and high sensitivity**




Image above for reference only

MADE IN TAIWAN

Specification

Model	F116PET-T22	
TFT LCD	Inch	11.6"
	Resolution	1920 x1080 (FHD)
	Signal Interface	LVDS
	Brightness	300 cd/m ² (Typ.)
	Viewing Angle	89/89/89/89
	Contrast	800 : 1 (Typ.)
	B/L Life Time (Hr)	15K (Min.)
	Backlight Driver	Built-in
PCAP Touch	Structure (Glass Thickness)	G/G (2.0 mm)
	Touch Control IC	EETI, EXC80W46
	FPC Type	COF
	Interface	USB / I2C
	Surface Treatment	Clear
	Transparency	85 ±3%
	Surface Hardness	≥6H
	Allow Touch Points	≤10 Points
	Input Method	Finger, Gloved, Stylus
Touch Display	Bonding Type	Air Bonding
	View Area (mm)	262.20 x 164.20
	Outline Dimension (mm)	302.00x 204.00 x 12.63
	Weight	0.43 Kg (Typ.)
	Operating Temperature	0 ~ 50 °C
	Storage Temperature	-20 ~ 60 °C
	OS	Android, Linux, MacOS, Windows

Dimension

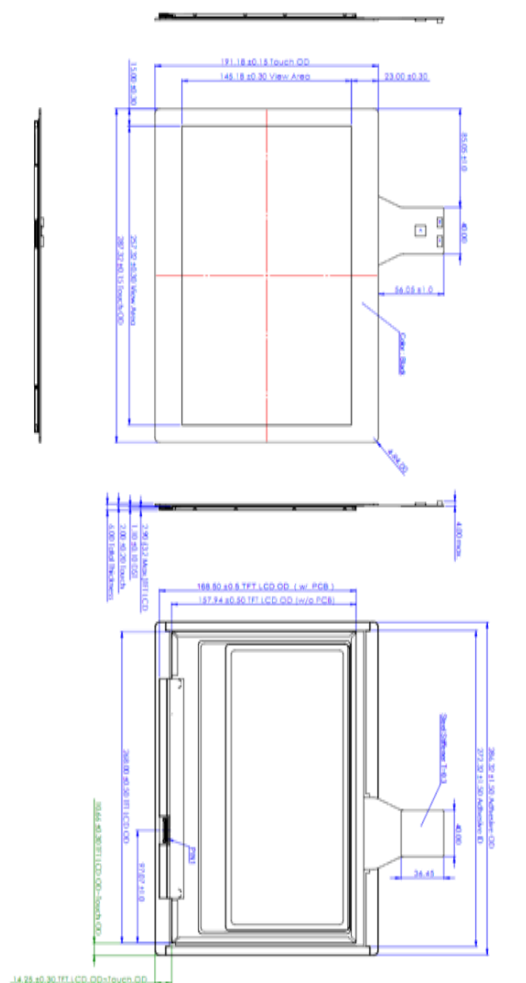

Packing Volume Reference

Packaging	Sample			Full Box	1 Pallet
QTY	1 pc	2 pcs	3 pcs	20 pcs	-
N.W. (Kg)	0.43	0.86	1.29	8.60	-
G.W. (Kg)	1.39	1.82	2.25	10.80	-
Dimension (mm)	470 x 320 x 155	470 x 320 x 155	470 x 320 x 155	580 x 370 x 390	-