

F121PET-Z10

(10-points)(Air Bonding)



Features

- **12.1" PCAP Multi-Touch Display**
- **1280 x 800, 1000 cd/m², LVDS Interface**
- **Supports 10-points touch**
- **High transparency and excellent display clarity**
- **Fast response and high sensitivity**




Image above for reference only

MADE IN TAIWAN

Specification

Model	F121PET-Z10	
TFT LCD	Inch	12.1"
	Resolution	1280 X 800 (WXGA)
	Signal Interface	LVDS
	Brightness	1000 cd/m ² (Typ.)
	Viewing Angle	89/89/89/89
	Contrast	1000 : 1 (Typ.)
	B/L Life Time (Hr)	50K (Min.)
	Backlight Driver	Built-in
PCAP Touch	Structure (Glass Thickness)	G/G (2.40 mm)
	Touch Control IC	EETI, EXC80W46
	FPC Type	COF
	Interface	USB / I2C
	Surface Treatment	Clear
	Transparency	85 ±3%
	Surface Hardness	≥6H
	Allow Touch Points	≤10 Points
Touch Display	Input Method	Finger, Gloved, Stylus
	Bonding Type	Air Bonding
	View Area (mm)	262.20 x 164.20
	Outline Dimension (mm)	302.00 x 204.00 x 13.04
	Weight	0.810 Kg (Typ.)
	Operating Temperature	-20 ~ 70 °C
	Storage Temperature	-30 ~ 80 °C
	OS	Android, Linux, MacOS, Windows

Dimension

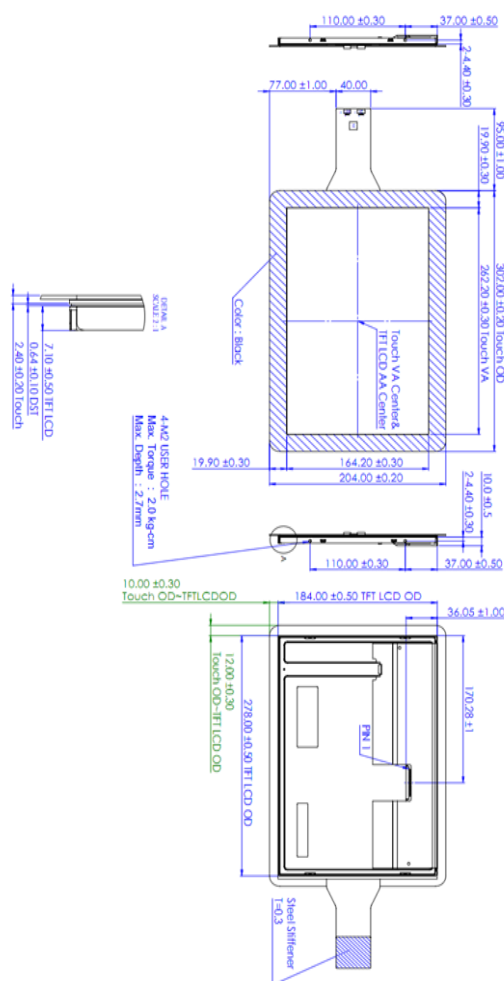

Packing Volume Reference

Packaging	Sample			Full Box	1 Pallet
QTY	1 pc	2 pcs	3 pcs	20 pcs	-
N.W. (Kg)	0.810	1.620	2.43	16.200	-
G.W. (Kg)	1.770	2.580	3.39	18.250	-
Dimension (mm)	470 x 320 x 155	470 x 320 x 155	470 x 320 x 155	580 x 370 x 390	-