

## F133PET-T41

(10-points)(Air Bonding)



### Features

- 13.3" PCAP Multi-Touch Display
- 1920 x 1080, 400 cd/m<sup>2</sup>, eDP Interface
- Supports 10-points touch
- High transparency and excellent display clarity
- Fast response and high sensitivity




Image above for reference only

**MADE IN TAIWAN**

### Specification

| Model         | F133PET-T41                 |                                |
|---------------|-----------------------------|--------------------------------|
| TFT LCD       | Inch                        | 13.3"                          |
|               | Resolution                  | 1920 X 1080 (FHD)              |
|               | Signal Interface            | eDP                            |
|               | Brightness                  | 400 cd/m <sup>2</sup> (Typ.)   |
|               | Viewing Angle               | 89/89/89/89                    |
|               | Contrast                    | 800 : 1 (Typ.)                 |
|               | B/L Life Time (Hr)          | 30K (Min.)                     |
|               | Backlight Driver            | Built-in                       |
| PCAP Touch    | Structure (Glass Thickness) | G/G (2.00 mm)                  |
|               | Touch Control IC            | EETI, EXC80W46                 |
|               | FPC Type                    | COF                            |
|               | Interface                   | USB / I2C                      |
|               | Surface Treatment           | Clear                          |
|               | Transparency                | 85 ±3%                         |
|               | Surface Hardness            | ≥6H                            |
|               | Allow Touch Points          | ≤10 Points                     |
| Touch Display | Input Method                | Finger, Gloved, Stylus         |
|               | Bonding Type                | Air Bonding                    |
|               | View Area (mm)              | 294.36 x 165.94                |
|               | Outline Dimension (mm)      | 330.76 x 214.24 x 6.01         |
|               | Weight                      | 0.55 Kg (Typ.)                 |
|               | Operating Temperature       | 0 ~ 50 °C                      |
|               | Storage Temperature         | -20 ~ 60 °C                    |
|               | OS                          | Android, Linux, MacOS, Windows |

### Dimension

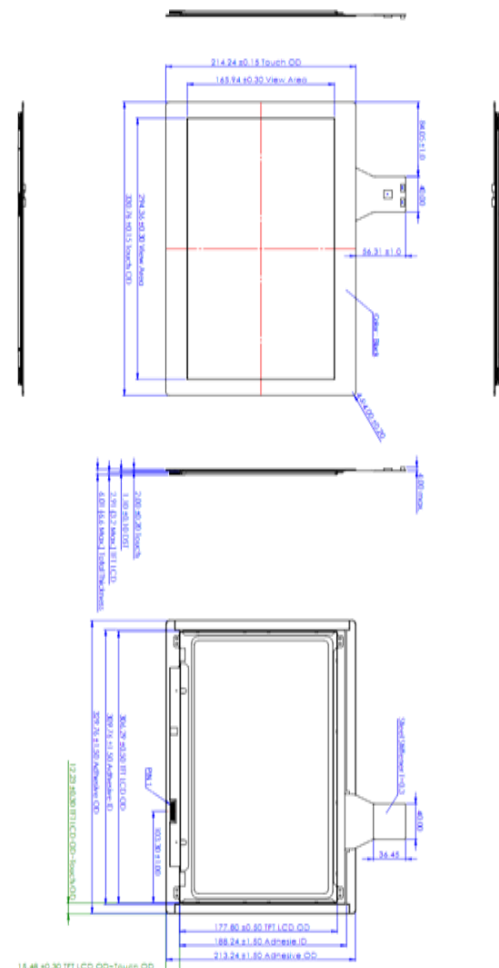

### Packing Volume Reference

| Packaging      | Sample          |                 |                 | Full Box        | 1 Pallet |
|----------------|-----------------|-----------------|-----------------|-----------------|----------|
| QTY            | 1 pc            | 2 pcs           | 3 pcs           | 15 pcs          | -        |
| N.W. (Kg)      | 0.55            | 1.10            | 1.65            | 8.25            | -        |
| G.W. (Kg)      | 1.51            | 2.06            | 2.61            | 10.05           | -        |
| Dimension (mm) | 470 x 320 x 155 | 470 x 320 x 155 | 470 x 320 x 155 | 440 x 380 x 340 | -        |