

F133PET-Z05

(10-points)(Air Bonding)



Features

- 13.3" PCAP Multi-Touch Display
- 1920 x 1080, 400 cd/m², LVDS Interface
- Supports 10-points touch
- High transparency and excellent display clarity
- Fast response and high sensitivity




Image above for reference only

MADE IN TAIWAN

Specification

Model	F133PET-Z05	
TFT LCD	Inch	13.3"
	Resolution	1920 X 1080 (FHD)
	Signal Interface	LVDS
	Brightness	400 cd/m ² (Typ.)
	Viewing Angle	89/89/89/89
	Contrast	800 : 1 (Typ.)
	B/L Life Time (Hr)	50K (Typ.)
	Backlight Driver	Built-in
PCAP Touch	Structure (Glass Thickness)	G/G (2.40 mm)
	Touch Control IC	EETI, EXC80W46
	FPC Type	COF
	Interface	USB / I2C
	Surface Treatment	Clear
	Transparency	85 ±3%
	Surface Hardness	≥6H
Touch Display	Allow Touch Points	≤10 Points
	Input Method	Finger, Gloved, Stylus
	Bonding Type	Air Bonding
	View Area (mm)	294.76 x 166.24
	Outline Dimension (mm)	330.76 x 214.24 x 12.24
	Weight	0.80 Kg (Typ.)
	Operating Temperature	-20 ~ 70 °C
	Storage Temperature	-30 ~80 °C
	OS	Android, Linux, MacOS, Windows

Dimension

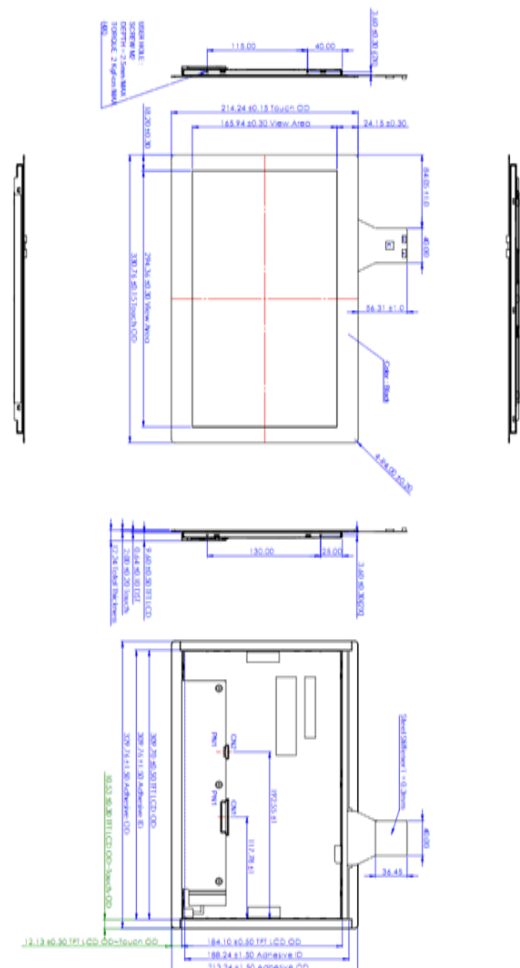

Packing Volume Reference

Packaging	Sample			Full Box	1 Pallet
QTY	1 pc	2 pcs	3 pcs	10 pcs	-
N.W. (Kg)	0.80	1.60	2.40	8.00	-
G.W. (Kg)	1.76	2.56	3.36	9.45	-
Dimension (mm)	470 x 320 x 155	470 x 320 x 155	470 x 320 x 155	410 x 380 x 350	-