

F150PET-TJ1

(10-points)(Air Bonding)



Features

- 15.0" PCAP Multi-Touch Display
- 1024 x 768, 1800 cd/m², LVDS Interface
- Supports 10-points touch
- High transparency and excellent display clarity
- Fast response and high sensitivity




Image above for reference only

MADE IN TAIWAN

Specification

Model	F150PET-TJ1	
TFT LCD	Inch	15.0"
	Resolution	1024X 768 (XGA)
	Signal Interface	LVDS
	Brightness	1800 cd/m ² (Typ.)
	Viewing Angle	89/89/89/89
	Contrast	800 : 1 (Typ.)
	B/L Life Time (Hr)	50K (Min.)
	Backlight Driver	Built-in
PCAP Touch	Structure (Glass Thickness)	G/G (2.40 mm)
	Touch Control Board	B000PDU-E03
	FPC Type	COB
	Interface	USB / I2C
	Surface Treatment	Clear
	Transparency	85 ±3%
	Surface Hardness	≥6H
	Allow Touch Points	≤10 Points
Touch Display	Input Method	Finger, Gloved, Stylus
	Bonding Type	Air Bonding
	View Area (mm)	305.13 x 229.10
	Outline Dimension (mm)	326.50 x 253.50 x 12.54
	Weight	1.410Kg (Typ.)
	Operating Temperature	-20 ~ 70 °C
	Storage Temperature	-30 ~ 70 °C
	OS	Android, Linux, MacOS, Windows

Dimension

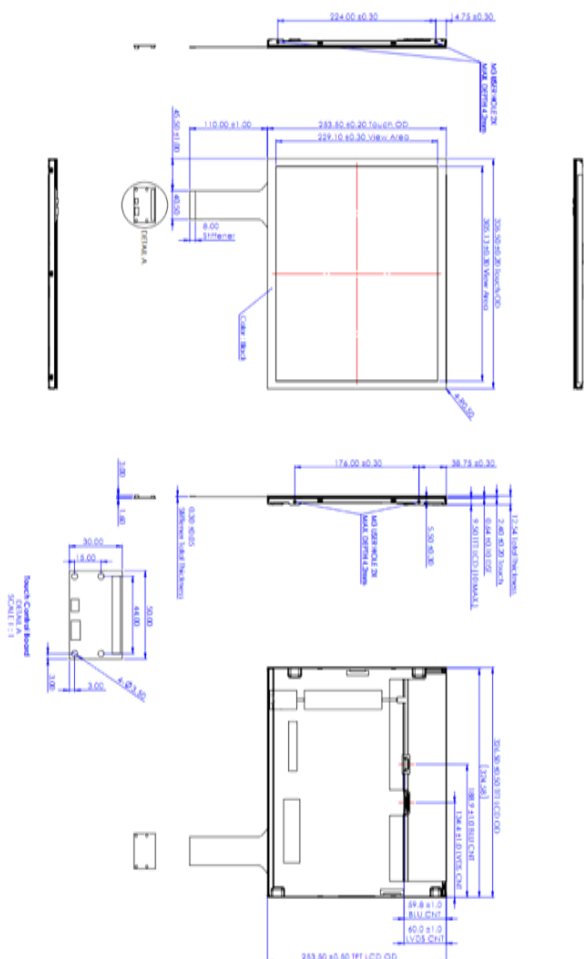

Packing Volume Reference

Packaging	Sample			Full Box	1 Pallet
QTY	1 pc	2 pcs	3 pcs	10 pcs	-
N.W. (Kg)	1.41	2.82	4.23	14.10	-
G.W. (Kg)	2.37	3.78	5.19	15.60	-
Dimension (mm)	470 x 320 x 155	470 x 320 x 155	470 x 320 x 155	410 x 380 x 350	-