



F156PET-TC2

(10-points)(Air Bonding)

Features

- **15.6" PCAP Multi-Touch Display**
- **1920 x 1080, 1200 cd/m², LVDS Interface**
- **Supports 10-points touch**
- **High transparency and excellent display clarity**
- **Fast response and high sensitivity**




Image above for reference only

MADE IN TAIWAN

Specification

Model	F156PET-TC2	
TFT LCD	Inch	15.6"
	Resolution	1920X 1080 (FHD)
	Signal Interface	LVDS
	Brightness	1200 cd/m ² (Typ.)
	Viewing Angle	89/89/89/89
	Contrast	800 : 1 (Typ.)
	B/L Life Time (Hr)	50K (Min.)
	Backlight Driver	Built-in
PCAP Touch	Structure (Glass Thickness)	G/G (2.70 mm)
	Touch Control Board	ETP-MB-EXC84H4254STAG
	FPC Type	COB
	Interface	USB
	Surface Treatment	Haze < 4 %
	Transparency	≥89 ±3 %
	Surface Hardness	≥6H
	Allow Touch Points	≤10 Points
Touch Display	Input Method	Finger, Gloved, Stylus
	Bonding Type	Air Bonding
	View Area (mm)	363.30 x 213.60
	Outline Dimension (mm)	364.30 x 215.90 x13.60
	Weight	1.26 Kg (Typ.)
	Operating Temperature	-20 ~ 70 °C
	Storage Temperature	-30 ~ 80 °C
	OS	Android, Linux, MacOS, Windows

Dimension

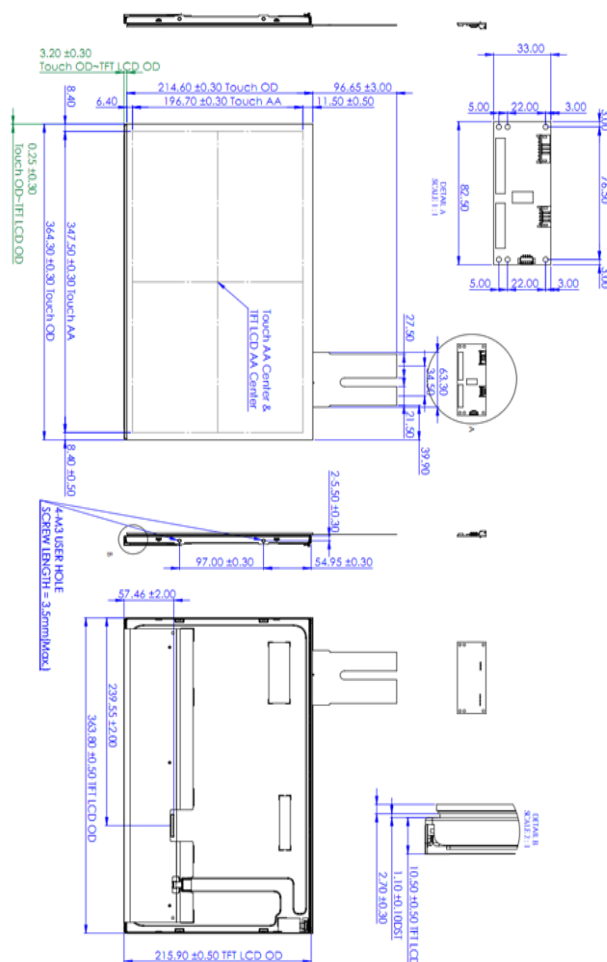

Packing Volume Reference

Packaging	Sample			Full Box	1 Pallet
QTY	1 pc	2 pcs	3 pcs	10 pcs	-
N.W. (Kg)	1.26	2.52	3.78	12.60	-
G.W. (Kg)	2.22	3.48	4.74	14.10	-
Dimension (mm)	470 x 370 x 155	470 x 370 x 155	470 x 370 x 155	470 x 370 x 354	-