

F190PET-T21

(10-points)(Air Bonding)



Features

- 19.0" PCAP Multi-Touch Display
- 1280 x 1024, 250 cd/m², LVDS Interface
- Supports 10-points touch
- High transparency and excellent display clarity
- Fast response and high sensitivity




Image above for reference only

MADE IN TAIWAN

Specification

Model	F190PET-T21	
TFT LCD	Inch	19.0"
	Resolution	1280 x 1024 (SXGA)
	Signal Interface	LVDS
	Brightness	250 cd/m ² (Typ.)
	Viewing Angle	85/85/80/80 (Typ.)
	Contrast	1000 : 1 (Typ.)
	B/L Life Time (Hr)	30K (Min.)
	Backlight Driver	External
PCAP Touch	Structure (Glass Thickness)	G/G (2.75 mm)
	Touch Control Board	ETP-MB-EXC84H4254STAG
	FPC Type	COB
	Interface	USB
	Surface Treatment	Haze < 4%
	Transparency	90 ± 3%
	Surface Hardness	≥ 7H
	Allow Touch Points	≤ 10 Points
Touch Display	Input Method	Finger, Gloved, Stylus
	Bonding Type	Air Bonding
	View Area (mm)	379.4 x 304.10
	Outline Dimension (mm)	396.00 x 324.00 x 14.19
	Weight	2.550 Kg (Typ.)
	Operating Temperature	0~ 50 °C
	Storage Temperature	-20 ~60 °C
	OS	Android, Linux, MacOS, Windows

Dimension

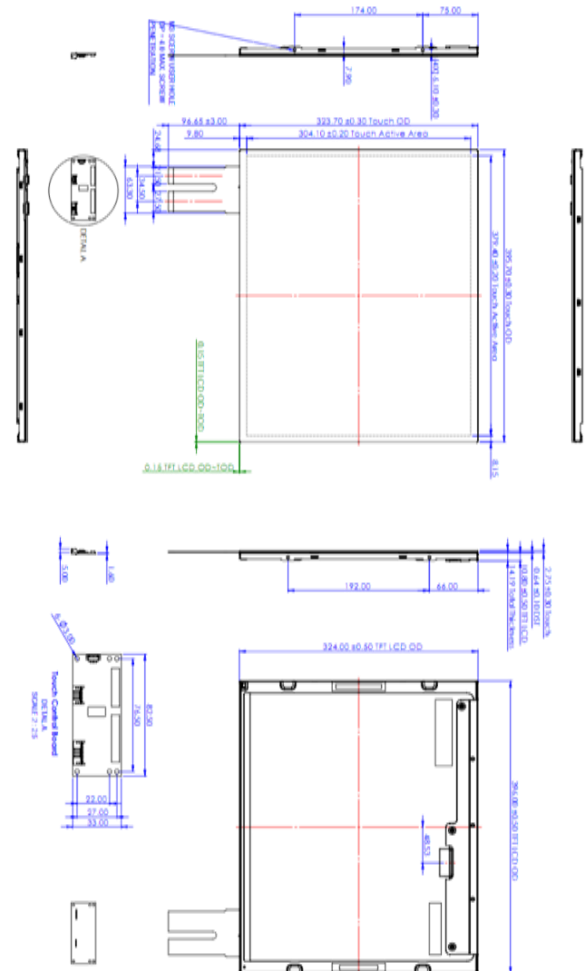

Packing Volume Reference

Packaging	Sample			Full Box	1 Pallet
QTY	1 pc	2 pcs	3 pcs	10 pcs	-
N.W. (Kg)	2.55	5.10	7.65	25.50	-
G.W. (Kg)	3.98	6.53	9.08	27.35	-
Dimension (mm)	525 x 370 x 215	525 x 370 x 215	525 x 370 x 215	530 x 380 x 365	-