

F238PET-Z07

(10-points)(Air Bonding)



Features

- **23.8" PCAP Multi-Touch Display**
- **1920 x 1080, 450 cd/m², LVDS Interface**
- **Supports 10-points touch**
- **High transparency and excellent display clarity**
- **Fast response and high sensitivity**




Image above for reference only

MADE IN TAIWAN

Specification

Model	F238PET-Z07	
TFT LCD	Inch	23.8"
	Resolution	1920 x 1080 (FHD)
	Signal Interface	LVDS
	Brightness	450 cd/m ² (Typ.)
	Viewing Angle	89/89/89/89
	Contrast	1000 : 1 (Typ.)
	B/L Life Time (Hr)	50K (Min.)
	Backlight Driver	External
PCAP Touch	Structure (Glass Thickness)	G/G (2.70 mm)
	Touch Control Board	ETP-MB-EXC84H5680STAG
	FPC Type	COB
	Interface	USB
	Surface Treatment	Haze < 4 %
	Transparency	90 ± 3 %
	Surface Hardness	≥ 7H
	Allow Touch Points	≤ 10 Points
Touch Display	Input Method	Finger, Gloved, Stylus
	Bonding Type	Air Bonding
	View Area (mm)	527.04 x 296.46
	Outline Dimension (mm)	544.00 x 322.00 x 17.15
	Weight	3.47 Kg (Typ.)
	Operating Temperature	0 ~ 60 °C
	Storage Temperature	-20 ~ 60 °C
	OS	Android, Linux, MacOS, Windows

Dimension

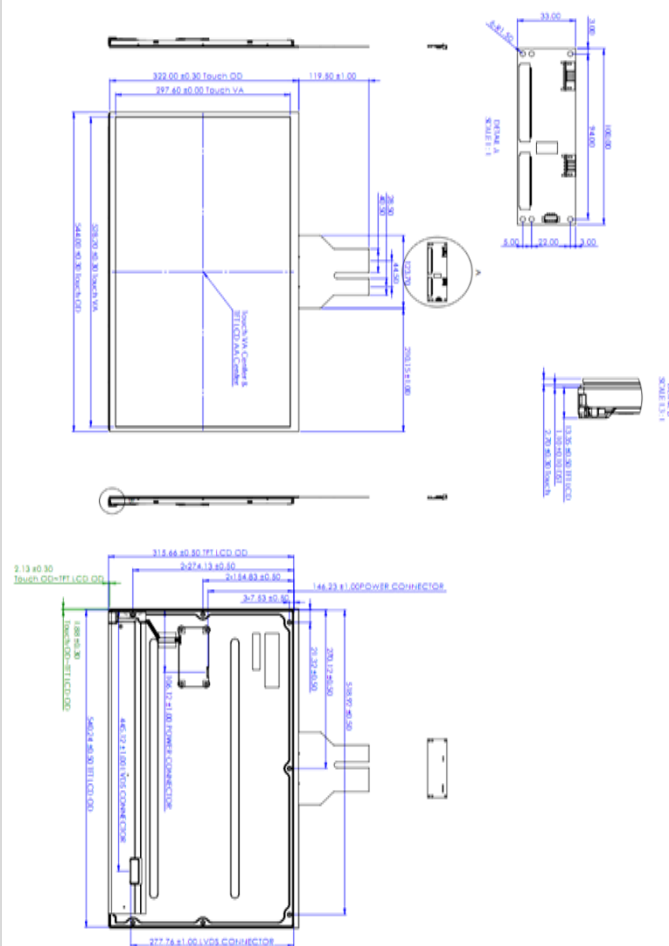

Packing Volume Reference

Packaging	Sample			Full Box	1 Pallet
QTY	1 pc	2 pcs	3 pcs	5 pcs	-
N.W. (Kg)	3.47	6.94	10.41	17.35	-
G.W. (Kg)	5.67	9.14	12.61	20.15	-
Dimension (mm)	660 x 480 x 230	660 x 480 x 230	660 x 480 x 230	745 x 310 x 480	-