



F238PET-Z08

(10-points)(Air Bonding)

Features

- **23.8" PCAP Multi-Touch Display**
- **3840 x 2160, 540 cd/m², LVDS Interface**
- **Supports 10-points touch**
- **High transparency and excellent display clarity**
- **Fast response and high sensitivity**




Image above for reference only

MADE IN TAIWAN

Specification

Model	F238PET-Z08	
TFT LCD	Inch	23.8"
	Resolution	3840 x 2160 (UHD)
	Signal Interface	eDP
	Brightness	540 cd/m ² (Typ.)
	Viewing Angle	89/89/89/89
	Contrast	1200 : 1 (Typ.)
	B/L Life Time (Hr)	30K (Min.)
	Backlight Driver	External
PCAP Touch	Structure (Glass Thickness)	G/G (4.0 mm)
	Touch Control Board	ETP-MB-EXC84H5680STAG
	FPC Type	COB
	Interface	USB
	Surface Treatment	Clear
	Transparency	≥85 %
	Surface Hardness	≥6H
	Allow Touch Points	≤10 Points
Touch Display	Input Method	Finger, Gloved, Stylus
	Bonding Type	Air Bonding
	View Area (mm)	525.658 x 295.704
	Outline Dimension (mm)	570.00 x 343.00 x 18.90
	Weight	3.96 Kg (Typ.)
	Operating Temperature	0 ~ 50 °C
	Storage Temperature	-20 ~ 60 °C
	OS	Android, Linux, MacOS, Windows

Dimension

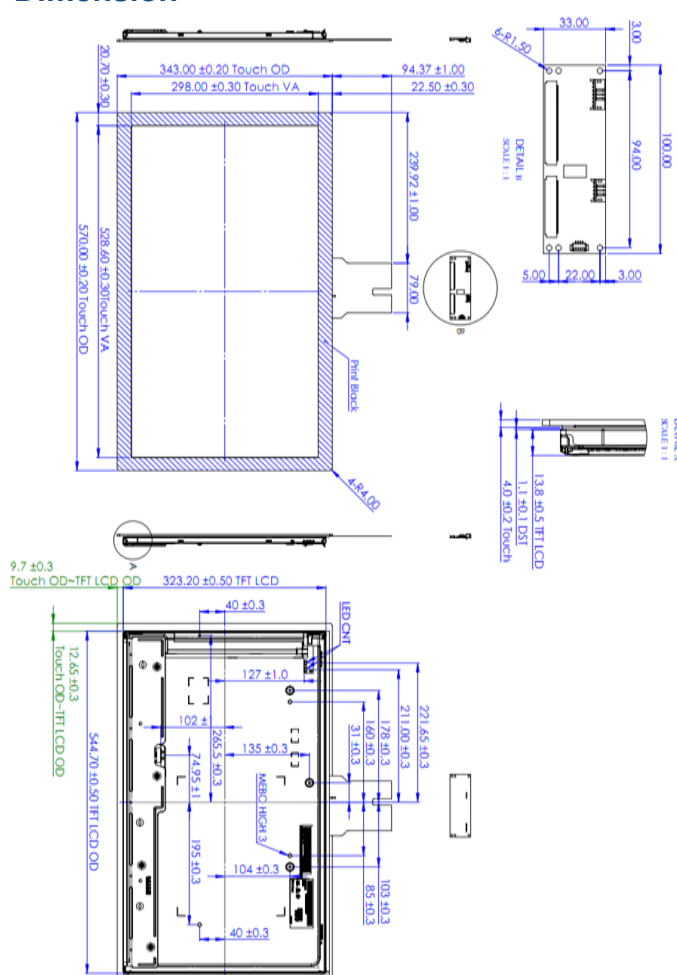

Packing Volume Reference

Packaging	Sample			Full Box	1 Pallet
QTY	1 pc	2 pcs	3 pcs	5 pcs	-
N.W. (Kg)	3.96	7.92	11.88	19.80	-
G.W. (Kg)	6.16	10.12	14.08	22.60	-
Dimension (mm)	660 x 480 x 230	660 x 480 x 230	660 x 480 x 230	745 x 310 x 480	-