

## F270PET-T31

(10-points)(Air Bonding)



### Features

- 27.0" PCAP Multi-Touch Display
- 1920 x 1080, 300 cd/m<sup>2</sup>, LVDS Interface
- Supports 10-points touch
- High transparency and excellent display clarity
- Fast response and high sensitivity




Image above for reference only

**MADE IN TAIWAN**

### Specification

| Model         | F270PET-T31                 |                                |
|---------------|-----------------------------|--------------------------------|
| TFT LCD       | Inch                        | 27.0"                          |
|               | Resolution                  | 1920 x 1080 (FHD)              |
|               | Signal Interface            | LVDS                           |
|               | Brightness                  | 300 cd/m <sup>2</sup> (Typ.)   |
|               | Viewing Angle               | 89/89/89/89                    |
|               | Contrast                    | 3000 : 1 (Typ.)                |
|               | B/L Life Time (Hr)          | 40K (Min.)                     |
|               | Backlight Driver            | External                       |
| PCAP Touch    | Structure (Glass Thickness) | G/G (4.0 mm)                   |
|               | Touch Control Board         | ETP-MB-EXC84H5680STAG          |
|               | FPC Type                    | COB                            |
|               | Interface                   | USB                            |
|               | Surface Treatment           | Clear                          |
|               | Transparency                | ≥85 %                          |
|               | Surface Hardness            | ≥6H                            |
|               | Allow Touch Points          | ≤10 Points                     |
| Touch Display | Input Method                | Finger, Gloved, Stylus         |
|               | Bonding Type                | Air Bonding                    |
|               | View Area (mm)              | 599.00 x 337.70                |
|               | Outline Dimension (mm)      | 629.00 x 372.00 x 15.50        |
|               | Weight                      | 4.50 Kg (Typ.)                 |
|               | Operating Temperature       | 0 ~ 50 °C                      |
|               | Storage Temperature         | -20 ~ 60 °C                    |
|               | OS                          | Android, Linux, MacOS, Windows |

### Dimension

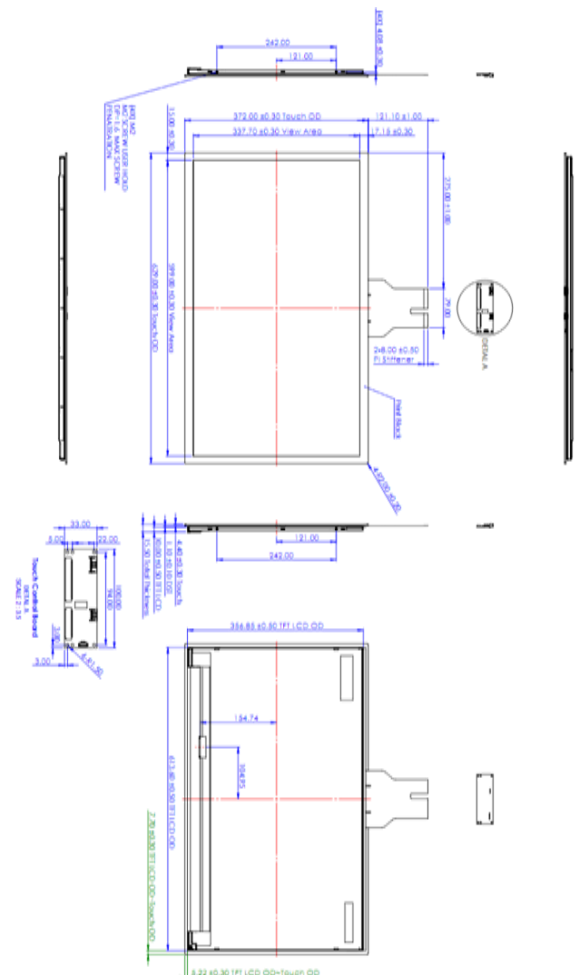

### Packing Volume Reference

| Packaging      | Sample          |                 |                 | Full Box        | 1 Pallet |
|----------------|-----------------|-----------------|-----------------|-----------------|----------|
| QTY            | 1 pc            | 2 pcs           | 3 pcs           | 5 pcs           | -        |
| N.W. (Kg)      | 4.50            | 9.00            | 13.50           | 22.50           | -        |
| G.W. (Kg)      | 7.30            | 11.80           | 16.30           | 25.30           | -        |
| Dimension (mm) | 745 x 310 x 480 | 745 x 310 x 480 | 745 x 310 x 480 | 745 x 310 x 480 | -        |