

F320PET-Z02

(10-points)(Air Bonding)



Features

- 32.0" PCAP Multi-Touch Display
- 1920 x 1080, 400 cd/m², LVDS Interface
- Supports 10-points touch
- High transparency and excellent display clarity
- Fast response and high sensitivity




Image above for reference only

MADE IN TAIWAN

Specification

Model	F320PET-Z02	
TFT LCD	Inch	32.0"
	Resolution	1920 x 1080 (FHD)
	Signal Interface	LVDS
	Brightness	400 cd/m ² (Typ.)
	Viewing Angle	89/89/89/89
	Contrast	4000 : 1 (Typ.)
	B/L Life Time (Hr)	30K (Min.)
PCAP Touch	Backlight Driver	Built-in
	Structure (Glass Thickness)	G/G (4.0 mm)
	Touch Control Board	B000PDU-E01
	FPC Type	COB
	Interface	USB
	Surface Treatment	Clear
	Transparency	≥83 %
Touch Display	Surface Hardness	≥6H
	Allow Touch Points	≤10 Points
	Input Method	Finger, Gloved, Stylus
	Bonding Type	Air Bonding
	View Area (mm)	699.40 x 393.855
	Outline Dimension (mm)	744.50 x 438.50 x 37.75
	Weight	7.200 Kg (Typ.)
	Operating Temperature	0 ~ 50 °C
	Storage Temperature	-20 ~ 60 °C
	OS	Android, Linux, MacOS, Windows

Dimension

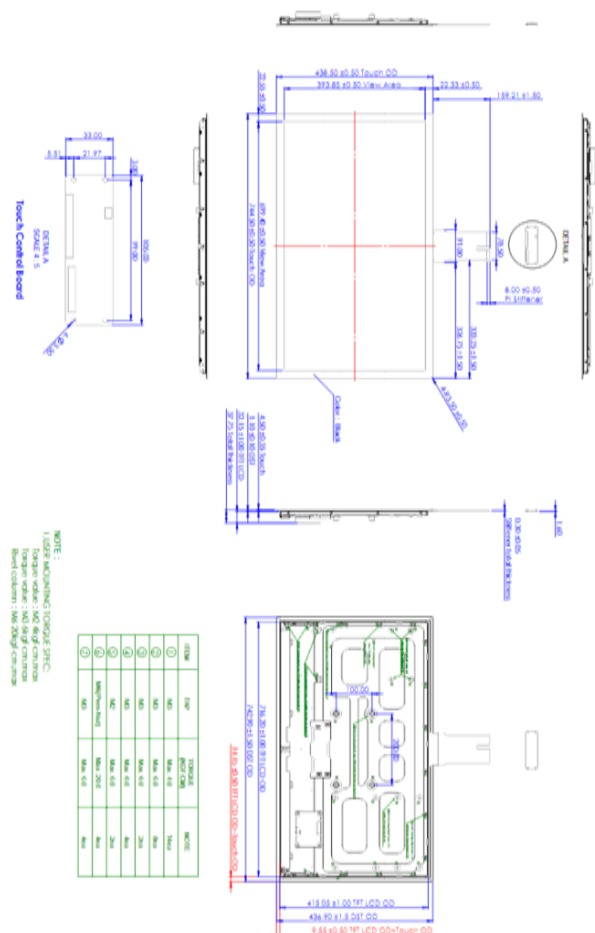

Packing Volume Reference

Packaging	Sample			Full Box	1 Pallet
QTY	1 pc	2 pcs	3 pcs	4 pcs	-
N.W. (Kg)	7.20	14.40	21.60	28.80	-
G.W. (Kg)	10.40	17.6	24.80	32.00	-
Dimension (mm)	855 x 300 x 560	855 x 300 x 560	855 x 300 x 560	855 x 300 x 560	-