

F065RET-T82

& ETP-MB-MER4050UEBG

(Air Bonding)

Features

- 6.5" RTP Touch Display
- 640 x 480, 800 cd/m², LVDS Interface
- Single-touch to prevent false touches
- Rugged and durable
- Low-cost advantage




Image above for reference only

MADE IN TAIWAN

Specification

Model	F065RET-T82	
TFT LCD	Inch	6.5"
	Resolution	640 x 480 (VGA)
	Signal Interface	LVDS
	Brightness	800 cd/m ² (Typ.)
	Viewing Angle	89/89/89/89
	Contrast	1,000 : 1 (Typ.)
	B/L Life Time (Hr)	70K (min)
	Backlight Driver	Built-in
RTP Touch	Touch Type	5 Wires Analog Resistive
	Structure (Glass Thickness)	F/G (1.4 mm)
	Surface Treatment	Haze 8±3%
	Transparency	85%
	Surface Hardness	3H
	Input Method	Stylus or Finger
Touch Display	Bonding Type	Air Bonding
	View Area (mm)	137.08 x 103.96
	Outline Dimension (mm)	153.00 x 118.00 x 12.94
	Weight	0.25 kg (Typ.)
	Operating Temperature	-20 ~ 70 °C
	Storage Temperature	-30 ~ 80 °C
Model	ETP-MB-MER4050UEBG	
Touch Controller	Touch IC	EETI, EXC7700
	Resolution	2048 x 2048 resolution
	Interface	USB
	OS	Android, Linux, MacOS, Windows

Dimension

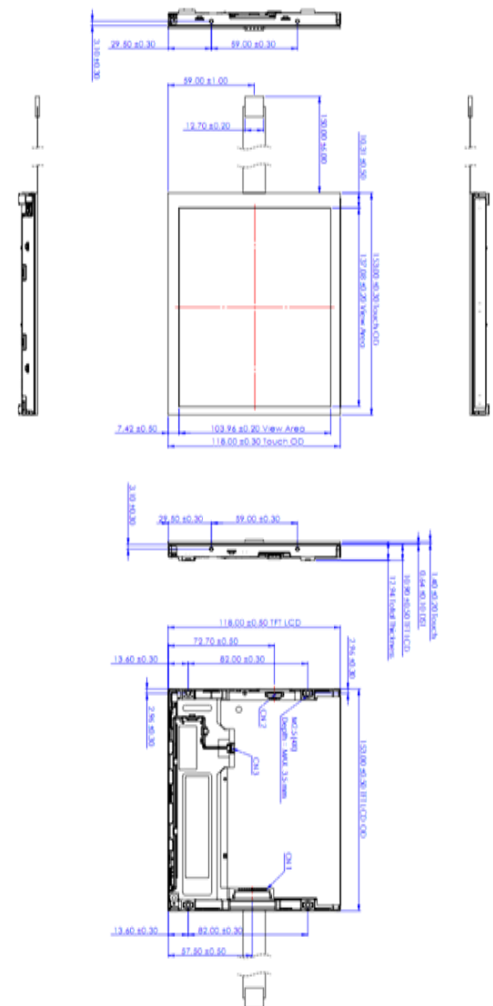

Packing Volume Reference

Packaging	Sample			Full Box	1 Pallet
QTY	1 pc	2 pcs	3 pcs	50 pcs	-
N.W. (Kg)	0.250	0.500	0.750	12.500	-
G.W. (Kg)	0.800	1.050	1.300	14.600	-
Dimension (mm)	340 x 250 x 170	340 x 250 x 170	340 x 250 x 170	500 x 365 x 280	-