

F104RET-TA1

& ETP-MB-MER4050UEBG (Air Bonding)



Features

- 10.4" RTP Touch Display
- 1024 x 800, 1000 cd/m², LVDS Interface
- Single-touch to prevent false touches
- Rugged and durable
- Low-cost advantage




Image above for reference only

MADE IN TAIWAN

Specification

Model	F104RET-TA1	
TFT LCD	Inch	10.4"
	Resolution	1024 x 768 (XGA)
	Signal Interface	LVDS
	Brightness	1000 cd/m ² (Typ.)
	Viewing Angle	88/88/88/88
	Contrast	1000 : 1 (Typ.)
	B/L Life Time (Hr)	50K (min.)
	Backlight Driver	Built-in
RTP Touch	Touch Type	5 Wires Analog Resistive
	Structure (Glass Thickness)	F/G (1.4 mm)
	Surface Treatment	Haze 8 ±3%
	Transparency	80±3%
	Surface Hardness	3H
	Input Method	Stylus or Finger
Touch Display	Bonding Type	Air Bonding
	View Area (mm)	213.20 x 160.40
	Outline Dimension (mm)	225.80 x 176.30 x 10.74
	Weight	0.46 Kg (Typ.)
	Operating Temperature	-10 ~ 60 °C
	Storage Temperature	-20 ~ 70 °C
Model	ETP-MB-MER4050UEBG	
Touch Controller	Touch IC	EETI, EXC7700
	Resolution	2048 x 2048 resolution
	Interface	USB
	OS	Android, Linux, MacOS, Windows

Dimension

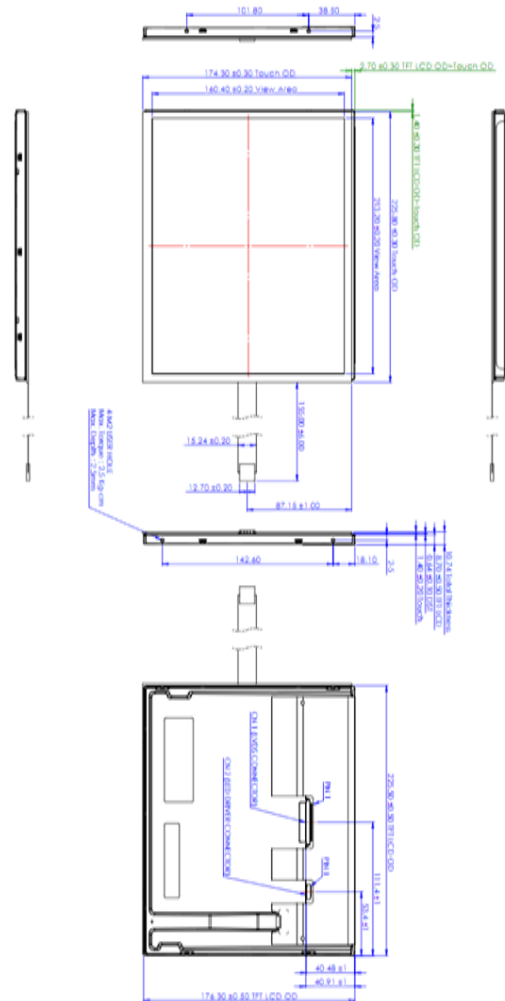

Packing Volume Reference

Packaging	Sample			Full Box	1 Pallet
QTY	1 pc	2 pcs	3 pcs	20 pcs	-
N.W. (Kg)	0.46	0.92	1.38	9.20	-
G.W. (Kg)	1.01	1.47	1.93	11.00	-
Dimension (mm)	340 x 250 x 170	340 x 250 x 170	340 x 250 x 170	440 x 380 x 340	-