F150RET-T81

& ETP-MB-MER4050UEBG (Air Bonding)



Features

- 15.0” RTP Touch Display
- 1024 x 768, 800 cd/m^2, LVDS Interface
- Single-touch to prevent false touches
- Rugged and durable
- Low-cost advantage


Image above for reference only

MADE IN TAIWAN

Specification

Model	F150RET-T81	
TFT LCD	Inch	15.0”
	Resolution	1024 x 768 (XGA)
	Signal Interface	LVDS
	Brightness	800 cd/m^2 (Typ.)
	Viewing Angle	89/89/89/89
	Contrast	1000 : 1 (Typ.)
	B/L Life Time (Hr)	50K (min.)
	Backlight Driver	Built-in
RTP Touch	Touch Type	5 Wires Analog Resistive
	Structure (Glass Thickness)	F/G (2.2 mm)
	Surface Treatment	Haze 8±3%
	Transparency	80±3%
	Surface Hardness	3H
	Input Method	Stylus or Finger
Touch Display	Bonding Type	Air Bonding
	View Area (mm)	309.50 x 233.50
	Outline Dimension (mm)	326.50 x 253.50 x 11.37
	Weight	1.32 kg (Typ.)
	Operating Temperature	-20 ~ 70 ℃
	Storage Temperature	-20 ~ 70 ℃
Model	**ETP-MB-MER4050UEBG**	
Touch Controller	Touch IC	EETI, EXC7700
	Resolution	2048 x 2048 resolution
	Interface	USB
	OS	Android, Linux, MacOS, Windows

Dimension

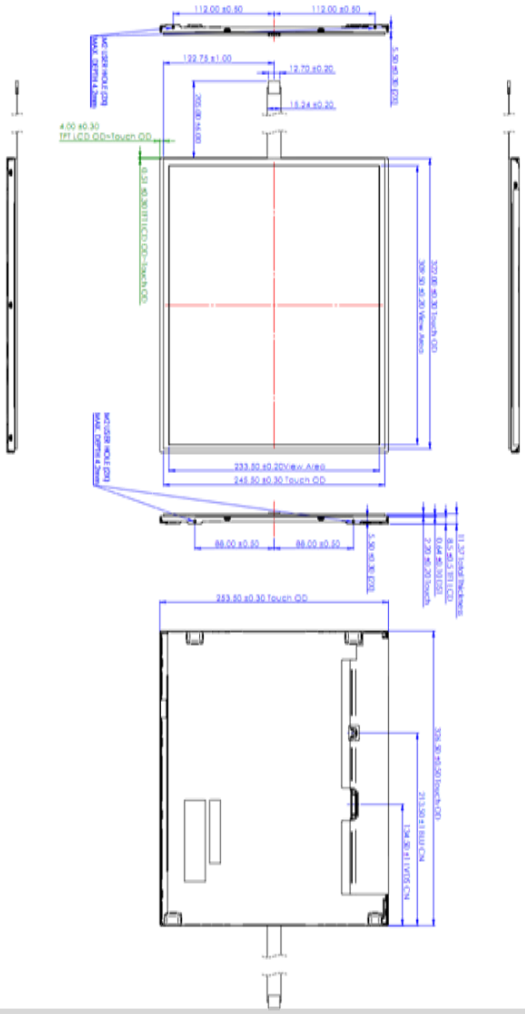

Packing Volume Reference

Packaging	Sample			Full Box	1 Pallet
QTY	1 pc	2 pcs	3 pcs	10 pcs	-
N.W. (Kg)	1.32	2.64	3.96	13.20	-
G.W. (Kg)	2.28	3.60	4.92	14.70	-
Dimension (mm)	470 x 320 x 155	470 x 320 x 155	470 x 320 x 155	410 x 380 x 350	-