

F170RET-T31

& ETP-MB-MER4050UEBG (Air Bonding)

Features

- 17.0" RTP Touch Display
- 1280 x 1024, 350 cd/m², LVDS Interface
- Single-touch to prevent false touches
- Rugged and durable
- Low-cost advantage




Image above for reference only

MADE IN TAIWAN

Specification

Model	F170RET-T31	
TFT LCD	Inch	17.0"
	Resolution	1280 x 1024 (SXGA+)
	Signal Interface	LVDS
	Brightness	350 cd/m ² (Typ.)
	Viewing Angle	85/85/80/80 (CR=10)
	Contrast	1000 : 1 (Typ.)
	B/L Life Time (Hr)	30K (min.)
	Backlight Driver	Built-in
RTP Touch	Touch Type	5 Wires Analog Resistive
	Structure (Glass Thickness)	F/G (2.2 mm)
	Surface Treatment	Haze 8±3%
	Transparency	80±3%
	Surface Hardness	≥3H
	Input Method	Stylus or Finger
Touch Display	Bonding Type	Air Bonding
	View Area (mm)	343.00 x 275.50
	Outline Dimension (mm)	358.50 x 296.50 x 20.06
	Weight	1.78 kg (Typ.)
	Operating Temperature	0 ~ 50 °C
	Storage Temperature	-20 ~ 60 °C
Model	ETP-MB-MER4050UEBG	
Touch Controller	Touch IC	EETI, EXC7700
	Resolution	2048 x 2048 resolution
	Interface	USB
	OS	Android, Linux, MacOS, Windows

Dimension

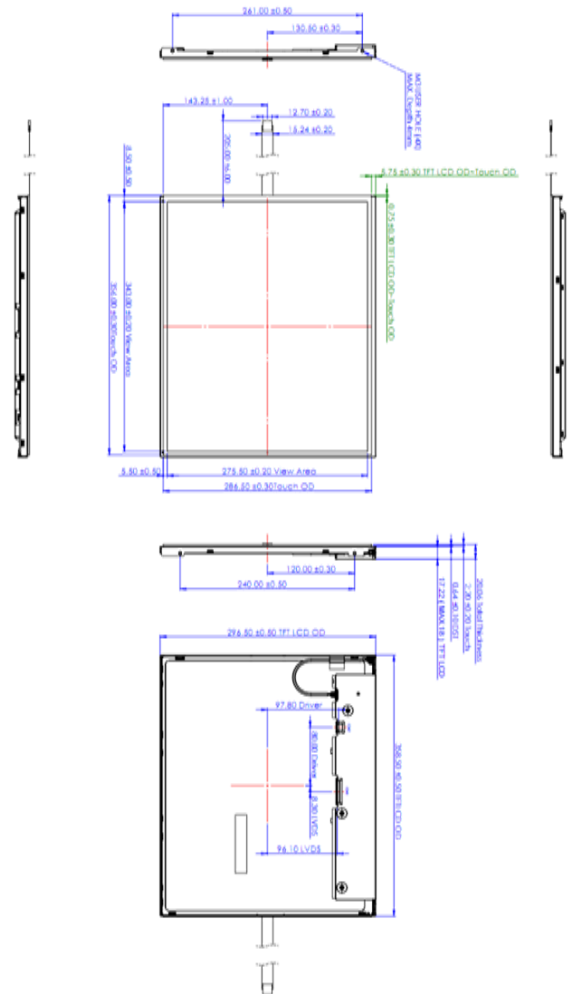

Packing Volume Reference

Packaging	Sample			Full Box	1 Pallet
QTY	1 pc	2 pcs	3 pcs	10 pcs	-
N.W. (Kg)	1.78	3.56	5.34	17.80	-
G.W. (Kg)	3.21	4.99	6.77	19.65	-
Dimension (mm)	525 x 370 x 215	525 x 370 x 215	525 x 370 x 215	530 x 380 x 365	-