

F215RET-TA1

& ETP-MB-MER4050UEBG (Air Bonding)

Features

- 21.5" RTP Touch Display
- 1920 x 1080, 1000 cd/m², LVDS Interface
- Single-touch to prevent false touches
- Rugged and durable
- Low-cost advantage




Image above for reference only

MADE IN TAIWAN

Specification

Model	F215RET-TA1	
TFT LCD	Inch	21.5"
	Resolution	1920 x 1080 (FHD)
	Signal Interface	LVDS
	Brightness	1000 cd/m ² (Typ.)
	Viewing Angle	89/89/89/89 (CR>10)
	Contrast	5000 : 1 (Typ.)
	B/L Life Time (Hr)	50K (min.)
	Backlight Driver	Built-in
RTP Touch	Touch Type	5 Wires Analog Resistive
	Structure (Glass Thickness)	F/G (3.20 mm)
	Surface Treatment	Haze 8±3%
	Transparency	80 ±3%
	Surface Hardness	3H
	Input Method	Stylus or Finger
Touch Display	Bonding Type	Air Bonding
	View Area (mm)	480.84 x 272.31
	Outline Dimension (mm)	497.60 x 292.20 x 27.89
	Weight	2.71 Kg (Typ.)
	Operating Temperature	-10 ~ 80 °C
	Storage Temperature	-10 ~ 80 °C
Model	ETP-MB-MER4050UEBG	
Touch Controller	Touch IC	EETI, EXC7700
	Resolution	2048 x 2048 resolution
	Interface	USB
	OS	Android, Linux, MacOS, Windows

Dimension

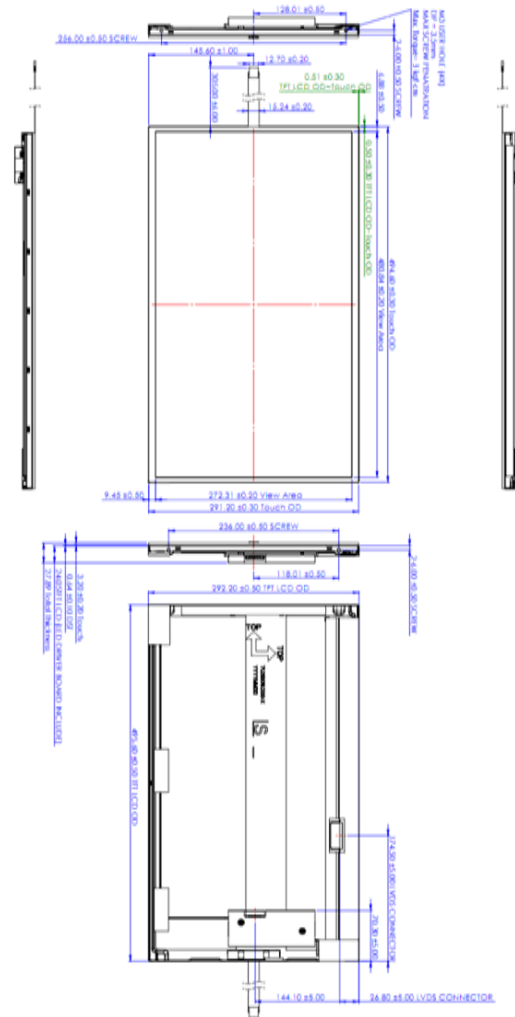

Packing Volume Reference

Packaging	Sample			Full Box	1 Pallet
QTY	1 pc	2 pcs	3 pcs	7 pcs	-
N.W. (Kg)	2.71	5.42	8.13	18.97	-
G.W. (Kg)	4.14	6.85	9.56	21.17	-
Dimension (mm)	525 x 370 x 215	525 x 370 x 215	525 x 370 x 215	596 x 370 x 414	-