
F238RET-T42

& ETP-MB-MER4050UEBG (Air Bonding)

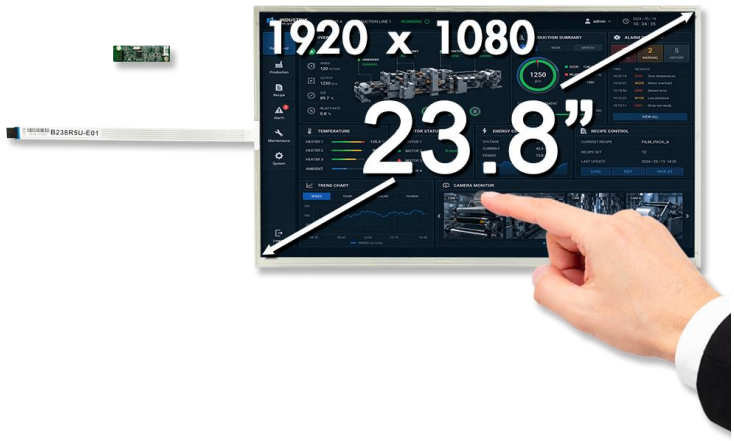

Features

- 23.8” RTP Touch Display
- 1920 x 1080, 450 cd/m^2, LVDS Interface
- Single-touch to prevent false touches
- Rugged and durable
- Low-cost advantage


Image above for reference only

MADE IN TAIWAN

Specification

Model	F238RET-T42	
TFT LCD	Inch	23.8”
	Resolution	1920 x 1080 (FHD)
	Signal Interface	LVDS
	Brightness	450 cd/m^2 (Typ.)
	Viewing Angle	89/89/89/89
	Contrast	1000 : 1 (Typ.)
	B/L Life Time (Hr)	50K (min.)
	Backlight Driver	Built-in
RTP Touch	Touch Type	5 Wires Analog Resistive
	Structure (Glass Thickness)	F/G (3.2 mm)
	Surface Treatment	Haze 8 ±3%
	Transparency	79% ±3%
	Surface Hardness	3H
	Input Method	Stylus or Finger
Touch Display	Bonding Type	Air Bonding
	View Area (mm)	529.20 x298.60
	Outline Dimension (mm)	543.00 x 317.40 x 13.80
	Weight	3.6 Kg (Typ.)
	Operating Temperature	0 ~ 60 ℃
	Storage Temperature	-20 ~ 60 ℃
Model	**ETP-MB-MER4050UEBG**	
Touch Controller	Touch IC	EETI, EXC7700
	Resolution	2048 x 2048 resolution
	Interface	USB
	OS	Android, Linux, MacOS, Windows

Dimension

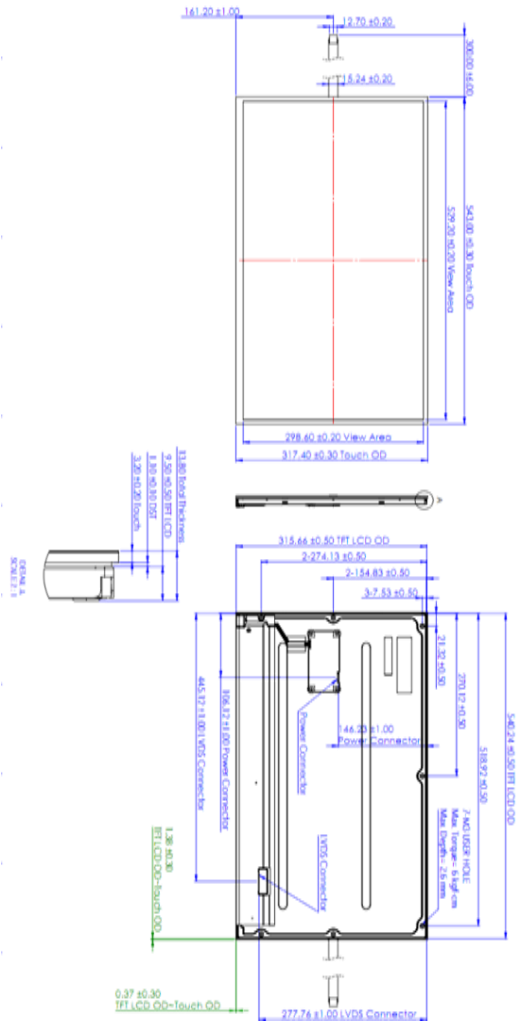

Packing Volume Reference

Packaging	Sample			Full Box	1 Pallet
QTY	1 pc	2 pcs	3 pcs	-	-
N.W. (Kg)	3.60	7.20	10.80	-	-
G.W. (Kg)	5.80	9.40	13.00	-	-
Dimension (mm)	660 x 480 x 230	660 x 480 x 230	660 x 480 x 230	-	-