


# G104XCE-LH1<sub>(TFT LCD)</sub> KADL037DAR<sub>(AD Board Kits)</sub>

High Brightness  
Wide Temperature

## Outdoor Auto Dimming

Automatically adjusts brightness according to ambient light

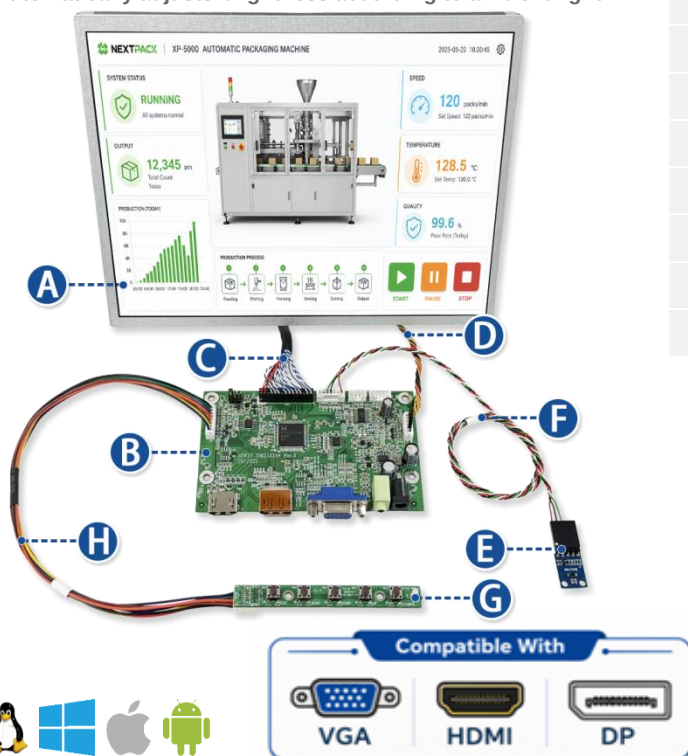

|   | Item               | Description                                |
|---|--------------------|--------------------------------------------|
| A | TFT LCD            | 1024 x 768 / 1,000nits / 50Khrs / -30~85°C |
| B | AD Board           | VGA+HDMI+DP / Audio / DC 12V               |
| C | Signal Cable       | LVDS Cable L= 300mm                        |
| D | BL Cable           | Backlight Cable L= 300mm                   |
| E | Light Sensor Board | Auto Dimming Board                         |
| F | Light Sensor Cable | Light Sensor Cable L = 500mm               |
| G | OSD Key Board      | 5Key : Power / Menu / Adj+ / Adj- / Exit   |
| H | OSD Key Cable      | OSD Key Cable L=300mm                      |



## Specification

| Model   | G104XCE-LH1     |                                |
|---------|-----------------|--------------------------------|
| TFT LCD | Inch            | 10.4"                          |
|         | Resolution      | 1024 x 768 (XGA)               |
|         | Brightness      | 1,000 cd/m <sup>2</sup> (Typ.) |
|         | Viewing Angle   | 88/88/88/88                    |
|         | TFT LCD OD (mm) | 225.5 x 176.3 x 8.7 (Typ.)     |

| Model         | KADL037DAR            |                                     |
|---------------|-----------------------|-------------------------------------|
| AD Board Kits | Vertical Refresh Rate | VESA Standard up to 60Hz            |
|               | Input Source          | VGA/HDMI/DP/Audio IN                |
|               | User Controls         | Power / menu / adj- / adj+ / exit   |
|               | Audio Output          | 1.4W + 1.4W at 8 ohm speaker        |
|               | AD Board OD (mm)      | 120.0 x 74.0 x 14.5 (Max.)          |
|               | Light Sensor OD (mm)  | 18.5 x 14.0 x 5.6 (Typ.)            |
|               | OSD Key Board OD (mm) | 92.0 x 11.0 x 7.0(Top)/ 5.0(Bottom) |

| Model       | Display Kits                |                                 |
|-------------|-----------------------------|---------------------------------|
| Information | Light Sensor Function 3Mode | Outdoor / Semi-Outdoor / Indoor |
|             | Voltage for Power Input     | DC 12V / 1A~5A                  |
|             | Power Consumption (OP.)     | 4.70W(typ.)                     |
|             | MTBF                        | 50Khrs                          |
|             | Operating Temperature       | -30 ~ 85°C                      |
|             | Storage Temperature         | -30 ~ 85°C                      |
|             | OS                          | Android, Linux, MacOS, Windows  |
|             | Safety regulations          | UL                              |

## APPLICATIONS

