



Effective Date: 2019.02.25

Author: MQMAB0

Version: 0

Document Chinese Title: **G101EAN Series TFT-LCD 進料檢驗規範 (A grade)**

Document English Title: Incoming Inspection Standard For G101EAN Series (A) TFT-LCD Modules

AU OPTRONICS CORPORATION

Preliminary Specification INCOMING INSPECTION STANDARD FOR 10.1" TFT-LCD MODULES (A grade)

Model Name: G101EAN Series

Approved By	Prepared By
<i>Hunglin Tsai</i>	<i>Shuwei Hu</i>

General Display Business Unit/AU Optronics

Customer	Checked and Approved by

Effective Date: **2019.02.25**

Author: MQMAB0

Version: 0

Document Chinese Title: **G101EAN Series TFT-LCD 進料檢驗規範 (A grade)**

Document English Title: Incoming Inspection Standard For G101EAN Series (A) TFT-LCD Modules

[illegible]

_(Note 1) The revised inspection criteria is effective before the expiration of the IIS as specified

1. Scope:

1.1 The incoming inspection standards shall be applied to TFT-LCD Modules (hereinafter called “Modules”) that supplied by AU Optonics Corporation (hereinafter called “seller”).

1.2 Specifications contains

- Electrical inspection specification
- Appearance specification
- Outside dimension specification

2. Incoming inspection:

The buyer (customer) shall inspect the modules within twenty calendar days since the delivery date (the “inspection period”) at its own cost. The results of the inspection (acceptance or rejection) shall be recorded in writing, and a copy of this writing will be promptly sent to the seller.

The buyer may, under commercially reasonable reject procedures, reject an entire lot in the delivery involved. Within the inspection period, if the samples of modules within a lot show a number of unacceptable defects in accordance with this incoming inspection standards, the buyer must notify the seller in writing of any such rejection promptly, and not later than within three business days in the end of the inspection period.

Should the buyer fail to notify the seller within the inspection period, the buyer’s right to reject the modules shall be lapsed and the modules shall be deemed to have been accepted by the buyer.

3. Inspection sampling method:

Unless otherwise agree in writing, the method of incoming inspection shall be based on MIL-STD-105E.

3.1 Lot size: Quantity per shipment lot per model.

3.2 Sampling type: Normal inspection, single sampling.

3.3 Sampling level: Level II.

3.4 Acceptable quality level (AQL):

Major defect: AQL=1.0%.

Minor defect: AQL=2.5%.

Fig.1: Inspection Sampling standard for MIL-STD-105E :

表14-1 MIL-STD-105E 樣本代字								
批量	特殊檢驗水準				一般檢驗水準			
	S-1	S-2	S-3	S-4	I	II	III	
2~8	A	A	A	A	A	A	B	
9~15	A	A	A	A	A	B	C	
16~25	A	A	B	B	B	C	D	
26~50	A	B	B	C	C	D	E	
51~90	B	B	C	C	C	E	F	
91~150	B	B	C	D	D	F	G	
151~280	B	C	D	E	E	G	H	
281~500	B	C	D	E	F	H	J	
501~1,200	C	C	E	F	G	J	K	
1,201~3,200	C	D	E	G	H	K	L	
3,201~10,000	C	D	F	G	J	L	M	
10,001~35,000	C	D	F	H	K	M	N	
35,001~150,000	D	E	G	J	L	N	P	
150,001~500,000	D	E	G	J	M	P	Q	
500,000以上	D	E	H	K	N	Q	R	

Rig.2 Incoming inspection judgment method :

樣本代字	樣本數	允收品質水準 (AQL · %)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
		0.010		0.015		0.025		0.040		0.065		0.10		0.15		0.25		0.40		0.65		1.0		1.5		2.5		4.0		6.5		10		15		25		40		65		100		150		250		400		650		1000																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
		Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac	Re	Ac

4. Inspection instruments:

4.1 Pattern generator: LD-2000 or equivalent model.

4.2 Video board: AU video board or equivalent. The output of the signal should comply with the specification provided by AU.

4.3 Luminance colorimeter: Topcon BM-7 or equivalent model

5. Inspection environment conditions:

5.1 Room temperature : 20 ~ 25 C.


5.2 Humidity: 65±5% RH.

5.3 Illumination: Fluorescent light (Day-Light Type) display surface illumination to be 300~700 lux (standard 500lux)

5.4 To be a distance about 35 ± 5 cm in front of LCD unit, viewing line should be perpendicular to the surface of the module judge the visual appearance with human's eyes. (±10° viewing edge will be allowed)

5.5 Take off the protector of polarizer while judging the display area.

5.6 If there is any question while judging, check the panel again while operating.

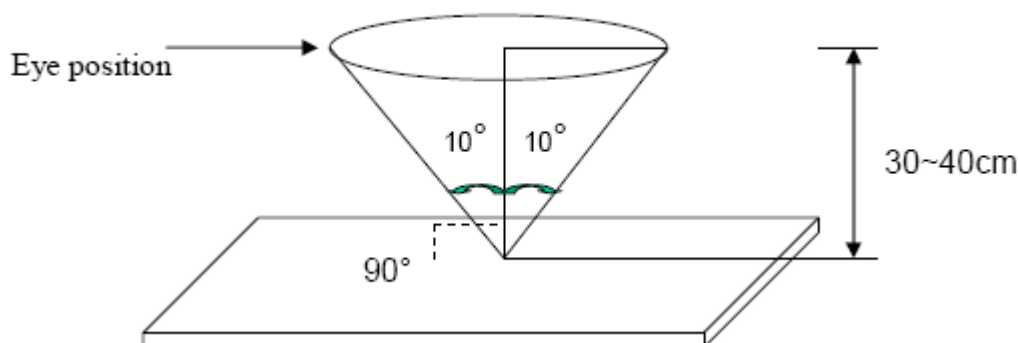

6. Classification of defects:

Defects are classified as major defects and minor defects according to the degree of defectiveness defined herein.

Major defects:

A major defect is a defect that is likely to result in failure, or to reduce materially the usability of the product for its intended purpose.

Minor defects:

A minor defect is either a defect that is not likely to reduce materially the usability of the product for its intended purpose, or a departure from an intended purpose with little bearing on the effective use or operation of the product.

6.1 Electrical inspection specification:

Inspection Item		Specification
Line defect		Not allowed
Bright dots		≤ 2 dots
Dark dots		≤ 3 dots
Total dots defect		≤ 5 dots
Continuous defect	Two continuous bright dots :	NA
	Over three continuous bright dots (vertical, horizontal, oblique) :	Not allowed
	Two continuous dark dots (vertical, horizontal, oblique) :	≤ 1 pairs
	Over three continuous dark dots (vertical, horizontal, oblique) :	Not allowed
	Two continuous dark dot and bright dot (vertical, horizontal, oblique) :	≤ 1 pair
	Over three continuous dots (vertical, horizontal, oblique) :	Not allowed
	Distance between 2 Bright dots :	≥ 5 mm
	Distance between 2 Dark dots :	≥ 5 mm
	Distance between Dark dot and Bright Dot :	≥ 5 mm



Effective Date: **2019.02.25**

Author: **MQMAB0**

Version: **0**

Document Chinese Title: **G101EAN Series TFT-LCD 進料檢驗規範 (A grade)**

Document English Title: **Incoming Inspection Standard For G101EAN Series (A) TFT-LCD Modules**

Mura	Can't be seen via 5% ND filter or judge by equivalent sample (JND2.5)
------	---

Note 1) Judgment criteria (For Bright dot and Small Bright dot) : Using 5% ND Filter. If dot defect could be observed, it is defined as one bright dot . If dot defect could not be observed, it is defined as small bright dot,

The amount of small bright dots which are invisible through 5% ND filter should be less or equal to 10.

Definition of two continuous dots: Only for two continuous dots , including vertical, horizontal, oblique type. The continuous dots should be observed under the same display pattern in any one of Black / White / Red / Green / Blue pattern.

*Inspection pattern: Standard inspection patterns of dot defect are listed below. AU uses these patterns as standard criteria for judging dot defect. Please inform AU if any other pattern is used to examine dot defect.

Test Pattern	Defect
Black	For bright dot(s)
White	For dark dot(s)
Red	For bright and dark dot(s)
Green	For bright and dark dot(s)
Blue	For bright and dark dot(s)

Note 3) Defect criteria diagram

- Dot defect diagram

One dot (Bright /Dark)

R	G	B
R	G	B
R	G	B

Two continuous dots(Bright/Dark)

R	G	B	R	G	B	R	G	B	R	G	B
R	G	B	R	G	B	R	G	B	R	G	B
R	G	B	R	G	B	R	G	B	R	G	B

- Definition of distance between defect dots as following

R	G	B	R	G	B	R
R	G	B	R	G	B	R
R	G	B	R	G	B	R

A: Distance between defect dots




Defect Dot

Note 4) In three (or more) adjacent dot defect, for any 3rd dot that adjacent to 2 continuous defective dots (can be of any combination of bright dots and dark dots), the 3rd dot, no matter how large it may be, should be viewed as a dot.

Note 5) Unless other specified written document or limit samples, Mura (display un-uniformity) should be inspected under the 5% ND filter and be acceptable when it is invisible.

ND filter use method: The inspection method of ND Filter - holding ND filter in front of the panel around 5 cm and examine the panel from 35±5 cm in the front view for 3 seconds.

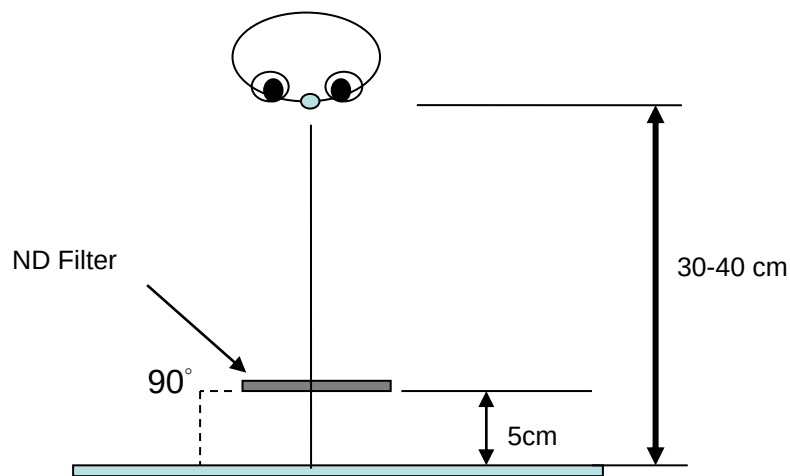

Note 6) While operating over 50°C ambient temperature , there should be no function failure occur and Mura (display un-uniformity) should be invisible under 1% ND filter applied.

Note 7) Image Retention : 5 seconds test pattern and image retention must be disappeared in 5 seconds after pattern changed .



Effective Date: 2019.02.25

Author: MQMAB0

Version: 0

Document Chinese Title: **G101EAN Series TFT-LCD 進料檢驗規範 (A grade)**


Document English Title: Incoming Inspection Standard For G101EAN Series (A) TFT-LCD Modules

6.2 Appearance inspection specification

Judge area	Judge item		Inspection specification			Judge criterion		
						Major	Minor	
Active area	Particles,	Circular	Average diameter: D (mm)		Numbers			○
			D≤0.15		Disregarded			
			0.15<D≤0.50,		n≤3			
			0.50<D		n=0			
		Linear	Width: W (mm) Length: L (mm)		Numbers			○
			W ≤0.05	Ignored	Disregarded			
			0.05<W ≤0.1	0.5<L≤2.0	n≤3			
			0.1<W	L>2.0	n=0			
	Scratch/ Dent	Circular	Average diameter: D (mm)		Numbers			○
			D≤0.15		Disregarded			
			0.15<D≤0.50		n≤3			
			0.50<D		n=0			
		Linear	Width: W (mm) Length: L (mm)		Numbers			○
			W ≤0.05	Ignored	Disregarded			
			0.05<W ≤0.1	0.5<L≤2.0	n≤3			
			0.1<W	L>2.0	n=0			
	Bubble	Circular	Average diameter: D (mm)		Numbers			○
			D≤0.15		Disregarded			
			0.15<D≤0.50		n≤3			
			0.50<D		n=0			
Bezel	Scratches, Wrap and Sunken		No harm, dangerous to human				○	
	Assembly Fail		Not allowed			○		
	Color Difference		Allowed if no harm, dangerous				○	
Carton and Panel Label (S/N, B/L, WEEK)	No label		Not allowed			○		
	Invert label					○		
	Broken					○		
	Dirt		No larger than 30mm×20mm.			○		
	Not clear		Word can be read. Barcode can be scanned.				○	
	Word out of shape						○	
	Content Error		No allowed			○		
	Position		Be attached on right position				○	
	Crease		No			○		
	Label overlapping		Allowed			○		
Screw	Not enough (Q'ty)		No			○		
	Loose		No			○		
Connector /FPC	Appearance		No practical display function impacted broken, rising, deformation			○		

Note 1 : When $L \geq 2W$, defect count as liner defect.

Note 2: $D=(W+L)/2$

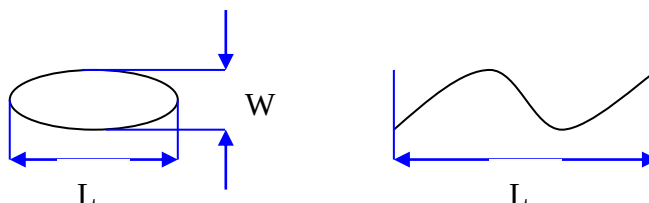

Note 3 : Extraneous substances which can be wiped out, such as fingerprint and particles are not considered as a defect.

Note 4 : Defects on the Black Matrix (outside Active Area 0.3mm) are not considered as a defect.

7. Inspection judgement:

- 7-1 The judgement of the shipped lot (acceptance or rejection) should follow the sampling plan of MIL-STD-105E, single sampling, normal inspection, level II.
- 7-2 If the number of defects is equal to or less than the applicable acceptance level, the lot shall be accepted.
- 7-3 If the number of defects is more than the applicable acceptance level, the lot shall be rejected and the buyer should inform the seller of the result of incoming inspection in writing

8. Precaution:

Please pay attention to the following items when you use the LCD Module with back-light unit.

1. Do not twist or bend the module and prevent the unsuitable external force for display module during assembly.
2. Adopt measures in adequately ventilated environment. Be sure to use the module in the specified temperature range.
3. Avoid dust or oil mist during assembly.
4. Follow the correct power sequence while operating. Do not apply the invalid signal, otherwise, it will cause improper shut down and damage the module.
5. Try to avoid the electrical magnetic interference, and it will be more safety and less noise.
6. Please operate module in suitable temperature. The response time & brightness will drift by different temperature.
7. Avoid displaying the fixed pattern (exclude the white pattern) in a long period, otherwise, it will cause image sticking.
8. Be sure to turn off the power when connecting or disconnecting the circuit.
9. Display surface Polarizer scratches easily, please avoid dirt and stains carefully.
10. A dewdrop may lead to destruction. Please wipe off any moisture before using module.
11. Sudden temperature changes cause condensation, and it will cause polarizer damaged.
12. High temperature and humidity may degrade performance. Please do not expose the module to the direct sunlight and so on.
13. Avoid any acid or chlorine compounds, which are harmful to the LCD module.
14. Static electricity will damage the modules; please do not touch the module without any grounded device connected.
15. Do not disassemble and reassemble the module by self.



Effective Date: **2019.02.25**

Author: **MQMAB0**

Version: **0**

Document Chinese Title: **G101EAN Series TFT-LCD 進料檢驗規範 (A grade)**

Document English Title: **Incoming Inspection Standard For G101EAN Series (A) TFT-LCD Modules**

16. Do not touch the rear side directly to avoid the electrical shock by the backlight high voltage.
17. Avoid strong vibration or shock. or it will cause the module broken.
18. Store the modules in suitable environment with regular packing.
19. Be careful of injury from a broken display module. Please avoid the pressure adding to the surface (front or rear side) of modules, because it will cause the non-uniformity or other function issue to display.

AU Optronics Corp.

No. 1, Li-Hsin Rd. II,

Science-Based Industrial Park,

Hsin-Chu City, Taiwan

Tel :886-3-500-8800

Fax:886-3-666-9320