

IEC SYSTEM FOR MUTUAL RECOGNITION OF TEST
CERTIFICATES FOR ELECTRICAL EQUIPMENT
(IECEE) CB SCHEME

SYSTEME CEI D'ACCEPTATION MUTUELLE DE
CERTIFICATS D'ESSAIS DES EQUIPEMENTS
ELECTRIQUES (IECEE) METHODE OC

CB TEST CERTIFICATE

Product
Produit

Name and address of the applicant
Nom et adresse du demandeur

Name and address of the manufacturer
Nom et adresse du fabricant

Name and address of the factory
Nom et adresse de l'usine

Note: When more than one factory, please report on page 2
Note: Lorsque il y plus d'une usine, veuillez utiliser la 2^{ème} page

Ratings and principal characteristics
Valeurs nominales et caractéristiques principales

Trademark (if any)
Marque de fabrique (si elle existe)
Type of Manufacturer's Testing Laboratories used
Type de programme du laboratoire d'essais constructeur

Model / Type Ref.
Ref. De type

Additional information (if necessary may also be reported on page 2)
Les informations complémentaires (si nécessaire,, peuvent être indiqués sur la 2^{ème} page

A sample of the product was tested and found to be in conformity with
Un échantillon de ce produit a été essayé et a été considéré conforme à la

As shown in the Test Report Ref. No. which forms part of this Certificate
Comme indiqué dans le Rapport d'essais numéro de référence qui constitue partie de ce Certificat

CERTIFICAT D'ESSAI OC

LCD Panel (LED Backlight)

AU OPTRONICS CORP
1 LI-HSIN RD 2 HSINCHU SCIENCE PARK HSINCHU 300
TAIWAN

AU OPTRONICS CORP
1 LI-HSIN RD 2 HSINCHU SCIENCE PARK HSINCHU 300
TAIWAN

AU OPTRONICS (LONGKE) CORPORATION
NO. 228, LONGKE ST, LONGTAN TOWNSHIP, TAOYUAN
COUNTY 32542
TAIWAN

☒ Additional Information on page 2

(optional)
1. 12Vdc, 1.29 A max.
2. 12Vdc, 1.1 A max.

AU Optronics

WMT

G170EGZZ, G170ETNZZZZ
See Page 2

Additionally evaluated to EN 60950-1:2006 /A11:2009 /A1:2010 /A12:2011 ; National Differences specified in the CB Test Report.

☐ Additional Information on page 2

IEC 60950-1(ed.2), IEC 60950-1(ed.2);am1

E204356-A299-CB-1 issued on 2014-05-27

This CB Test Certificate is issued by the National Certification Body
Ce Certificat d'essai OC est établi par l'Organisme **National de Certification**



- ☐ UL (US), 333 Pfingsten Rd IL 60062, Northbrook, USA
- ☒ UL (Denko), Borupvang 5A DK-2750 Ballerup, DENMARK
- ☐ UL (JP), Marunouchi Trust Tower Main Building 6F, 1-8-3 Marunouchi, Chiyoda-ku, Tokyo 100-0005, JAPAN
- ☐ UL (CA), 7 Underwriters Road, Toronto, M1R 3B4 Ontario, CANADA

For full legal entity names see www.ul.com/ncbnames

Date: 2014-05-27

Signature:

Jan-Erik Storgaard

Model Details:

G170EGZZ,G170ETNZZZZ (Z May be any alphanumeric character or blank for marketing purpose).

Factories:

AU OPTRONICS (TAICHUNG) CORPORATION

1, JHONG KE RD., CENTRAL TAIWAN SCIENCE PARK TAICHUNG 407
TAIWAN

AU OPTRONICS (SUZHOU) CORPORATION

398 SUHONG ZHONG RD. SUZHOU INDUSTRIAL PARK, JIANGSU 215021
P.R. CHINA

AU OPTRONICS (XIAMEN) CORPORATION

NO.1689, NORTH OF XIANG'AN ROAD, XIANG'AN BRANCH TORCH HI-TECH INDUSTRIAL DEVELOPMENT
ZONE, XIAMEN 361102
P.R. CHINA

AU OPTRONICS MANUFACTURING (SHANGHAI) CORP

NO. 3, LN 58, SAN-ZHUANG RD., SONGJIANG EXPORT PROCESSING ZONE, SHANGHAI
P.R. CHINA

DARWIN PRECISIONS (SZ) CORPORATION NO. 11, TINGXIN STREET, SUZHOU INDUSTRIAL PARK SUZHOU
215021

P.R. CHINA

FORTECH ELECTRONICS(SUZHOU) CO.,LTD

NO.399 JIN HU WEST ROAD ,WUJIANG ECONOMIC DEVELOPMENT JIANGSU PROVINCE 215200
P.R. CHINA

QISDA (SUZHOU) CO., LTD.

NO.169 ZHUJIANG ROAD, NEW DISTRICT, SUZHOU, JIANGSU 215129
P.R. CHINA

FORTECH ELECTRONICS(KUNSHAN) CO.,LTD

NO. 555, TONGFENG EAST RD., ECONOMICAL EXPLOITATION AREA KUNSHAN CITY, JIANGSU PROVINCE
215334
P.R. CHINA

RADIANT OPTO-ELECTRONICS (SUZHOU) CO., LTD

NO.1621, JIANGXING EAST RD, ECONOMIC DEVELOPING AREA, WUJIANG JIANGSU 215011
P.R. CHINA

DARWIN PRECISIONS (XIAMEN) CORP

3089 NORTH OF XIANG'AN RD XIANG'AN BRANCH TORCH HI-TECH INDUSTRIAL DEVELOPMENT ZONE
XIAMEN FUJIAN 361102
P.R. CHINA

BRIVIEW (HEFEI) CORP.

176 YUNER RD HEFEI ECONOMIC &TECHNOLOGICAL DEVELOPMENT AREA, HEFEI ANHUI 230601
P.R. CHINA

BRIVIEW (XIAMEN) CORP.

NO. 1998, WEST OF FANG SHAN ROAD, XIANG AN BRANCH, TORCH HI-TECH INDUSTRIAL DEVELOPMENT
ZONE, XIAMEN
P.R. CHINA

Additional information (if necessary)
Information complémentaire (si nécessaire)


UL (US), 333 Pfingsten Rd IL 60062, Northbrook, USA

UL (Demko), Borupvang 5A DK-2750 Ballerup, DENMARK

UL (JP), Marunouchi Trust Tower Main Building 6F, 1-8-3 Marunouchi, Chiyoda-ku, Tokyo 100-0005, JAPAN

UL (CA), 7 Underwriters Road, Toronto, M1R 3B4 Ontario, CANADA

For full legal entity names see www.ul.com/ncbnames

Date: 2014-05-27

Signature:



Jan-Erik Storgaard

Test Report issued under
the responsibility of:

TEST REPORT
IEC 60950-1
Information technology equipment - Safety -
Part 1: General requirements

Report Reference No : E204356-A299-CB-1

Date of issue : 2014-05-27

Total number of pages : 53

CB Testing Laboratory : Underwriters Laboratories Taiwan Co., Ltd.

Address : 260 Da-Yeh Road, 112 Peitou Taipei City, Chinese Taipei

Applicant's name : AU OPTRONICS CORPAddress : 1 LI-HSIN RD 2
HSINCHU SCIENCE PARK
HSINCHU
300 TAIWAN**Test specification:**

Standard : IEC 60950-1:2005 (2nd Edition); Am 1:2009

Test procedure : CB Scheme

Non-standard test method : N/A

Test Report Form No. : IEC60950_1C

Test Report Form originator : SGS Fimko Ltd

Master TRF : 2012-08

Copyright © 2012 Worldwide System for Conformity Testing and Certification of Electrotechnical Equipment and Components (IECEE), Geneva, Switzerland. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this test Report is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.

General disclaimer

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

Test item description	LCD Panel (LED Backlight)
Trade Mark	AU Optronics
Manufacturer	AU OPTRONICS CORP 1 LI-HSIN RD 2 HSINCHU SCIENCE PARK HSINCHU 300 TAIWAN
Model/Type reference	G170EGZZ, G170ETNZZZZ (Z May be any alphanumeric character or blank for marketing purpose).
Ratings	(optional) 1. 12Vdc, 1.29 A max. 2. 12Vdc, 1.1 A max.

Testing procedure and testing location:	
☐ CB Testing Laboratory	Testing location / address..... :
☐ Associated CB Test Laboratory	Testing location / address..... :
	Tested by (name + signature) :
	Approved by (name + signature) ... :
☐ Testing Procedure: TMP/CTF Stage 1	Testing location / address..... :
	Tested by (name + signature) :
	Approved by (+ signature) :
☒ Testing Procedure: WMT/CTF Stage 2	Testing location / address..... :
Tested by (name + signature) :	Joan Chen
Witnessed by (+ signature)..... :	Ben Chang
Approved by (+ signature) :	Allen Huang
Testing location / address..... :	AU OPTRONICS CORP./ No. 23, Li-Hsin Road, Hsinchu Science Park, Hsinchu 300, Taiwan R.O.C.
☐ Testing Procedure: SMT/CTF Stage 3 or 4	Testing location / address..... :
	Tested by (name + signature) :
	Approved by (+ signature) :
	Supervised by (+ signature) :
☐ Testing Procedure: RMT	Testing location / address..... :
	Tested by (name + signature) :
	Approved by (+ signature) :
	Supervised by (+ signature) :

List of Attachments

National Differences (41 pages)

Enclosures (14 pages)

Summary Of Testing

Unless otherwise indicated, all tests were conducted at AU OPTRONICS CORP./ No. 23, Li-Hsin Road, Hsinchu Science Park, Hsinchu 300, Taiwan R.O.C..

Tests performed (name of test and test clause)	Testing location / Comments
Input: Single-Phase (1.6.2) SELV Reliability Test Including Hazardous Voltage Measurements (2.2.2, 2.2.3, 2.2.4, Part 22 6.1) Heating (4.5.1, 1.4.12, 1.4.13) Summary of Compliance with National Differences: Countries outside the CB Scheme membership may also accept this report. List of countries addressed: AT, BE, BG, BY, CA, CH, CN, CZ, DE, DK, ES, EU, FI, FR, GB, GR, HU, IE, IL, IT, JP, KR, NL, NO, PL, PT, RO, SE, SG, SI, SK, UA, US The product fulfills the requirements of: CSA C22.2 No. 60950-1-07 + A1:2011	
Copy of Marking Plate - Refer to Enclosure titled Marking Plate for copy.	

Test item particulars :

Equipment mobility	for building-in
Connection to the mains	No direct connection
Operating condition	continuous
Access location	operator accessible
Over voltage category (OVC)	Not directly connect to mains
Mains supply tolerance (%) or absolute mains supply values	No direct connection
Tested for IT power systems	No
IT testing, phase-phase voltage (V)	N/A
Class of equipment	Class III (supplied by SELV)
Considered current rating of protective device as part of the building installation (A)	N/A
Pollution degree (PD)	PD 3
IP protection class	IP X0
Altitude of operation (m)	Up to 2000
Altitude of test laboratory (m)	Up to 2000
Mass of equipment (kg)	1.8 max.

Possible test case verdicts:

- test case does not apply to the test object : N / A
- test object does meet the requirement : P(Pass)
- test object does not meet the requirement : F(Fail)

Testing:

Date(s) of receipt of test item	2013-05-02
Date(s) of Performance of tests	2013-05-02

General remarks:

"(see Enclosure #)" refers to additional information appended to the report.
 "(see appended table)" refers to a table appended to the report.

Throughout this report a point is used as the decimal separator.

Manufacturer's Declaration per Sub Clause 4.2.5 of IEC 60950-1:

Yes

The application for obtaining a CB Test Certificate includes more than one factory and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided

When differences exist, they shall be identified in the General Product Information section.

Name and address of Factory(ies):

1. AU OPTRONICS (LONGKE) CORPORATION NO. 228,
 LONGKE ST, LONGTAN TOWNSHIP, TAOYUAN COUNTY
 32542, TAIWAN

2. AU OPTRONICS (TAICHUNG) CORPORATION 1, JHONG

KE RD., CENTRAL TAIWAN SCIENCE PARK TAICHUNG 407, TAIWAN.

3. AU OPTRONICS (SUZHOU) CORPORATION, 398 SUHONG ZHONG RD. SUZHOU INDUSTRIAL PARK, JIANGSU 215021, P.R. CHINA

4. AU OPTRONICS (XIAMEN) CORPORATION NO.1689, NORTH OF XIANG'AN ROAD, XIANG'AN BRANCH TORCH HI-TECH INDUSTRIAL DEVELOPMENT ZONE, XIAMEN 361102, P.R. CHINA

5. AU OPTRONICS MANUFACTURING (SHANGHAI) CORP. NO. 3, LN 58, SAN-ZHUANG RD., SONGJIANG EXPORT PROCESSING ZONE, SHANGHAI, P.R. CHINA

6. DARWIN PRECISIONS (SZ) CORPORATION NO. 11, TINGXIN STREET, SUZHOU INDUSTRIAL PARK SUZHOU 215021 P.R. CHINA

7. FORTECH ELECTRONICS(SUZHOU) CO.,LTD NO.399 JIN HU WEST ROAD ,WUJIANG ECONOMIC DEVELOPMENT JIANGSU PROVINCE 215200, P.R. CHINA

8. QISDA (SUZHOU) CO., LTD. NO.169 ZHUJIANG ROAD, NEW DISTRICT, SUZHOU, JIANGSU 215129, P.R. CHINA

9. FORTECH ELECTRONICS(KUNSHAN) CO.,LTD NO. 555, TONGFENG EAST RD., ECONOMICAL EXPLOITATION AREA KUNSHAN CITY, JIANGSU PROVINCE 215334, P.R. CHINA

10. RADIANT OPTO-ELECTRONICS (SUZHOU) CO., LTD NO.1621, JIANGXING EAST RD, ECONOMIC DEVELOPING AREA, WUJIANG JIANGSU 215011, P.R. CHINA

11. DARWIN PRECISIONS (XIAMEN) CORP 3089 NORTH OF XIANG'AN RD XIANG'AN BRANCH TORCH HI-TECH INDUSTRIAL DEVELOPMENT ZONE XIAMEN FUJIAN 361102, P.R. CHINA

12. BRIVIEW (HEFEI) CORP. 176 YUNER RD HEFEI ECONOMIC &TECHNOLOGICAL DEVELOPMENT AREA, HEFEI ANHUI 230601, P.R. CHINA

13. BRIVIEW (XIAMEN) CORP. NO. 1998, WEST OF FANG SHAN ROAD, XIANG AN BRANCH, TORCH HI-TECH INDUSTRIAL DEVELOPMENT ZONE, XIAMEN P.R. CHINA

GENERAL PRODUCT INFORMATION:

Report Summary

All applicable tests according to the referenced standard(s) have been carried out.

Product Description

TFT panel secured on metal chassis, and supplied by SELV intended for building in.

Model Differences

All models are identical except for model designation and drive board with different ratings.

Additional Information

N/A

Technical Considerations

- The product was submitted and evaluated for use at the maximum ambient temperature (Tma) permitted by the manufacturer's specification of: 50°C
- The product was investigated to the following additional standards: EN 60950-1:2006 + A11:2009 + A12:2010 + A12:2011 (which includes all European national differences, including those specified in this test report).
- LEDs provided in the product are considered low power devices: Yes

Engineering Conditions of Acceptability

When installed in an end-product, consideration must be given to the following:

- The following secondary output circuits are SELV: - After LED drive board, (P/N: 17G02): J3, (P/N: G170ETN% % % % (% may be 0-9, A-Z or blank)): J502.
- The power supply terminals and/or connectors are: Suitable for factory wiring only
- The investigated Pollution Degree is: 2
- The following end-product enclosures are required: Mechanical
- The component is evaluated for use in SELV circuits. --
- Safety Instruction should be considered in end-product evaluation --
- To be determined in end product. The Maximum temperature (Tmax) for Panel Surface should not exceed 95 degree C. --

Abbreviations used in the report:

- normal condition	N.C.	- single fault condition	S.F.C
- operational insulation	OP	- basic insulation	BI
- basic insulation between parts of opposite polarity:	BOP	- supplementary insulation	SI
- double insulation	DI	- reinforced insulation	RI

Indicate used abbreviations (if any)

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1	GENERAL		Pass
1.5	Components		Pass
1.5.1	General		Pass
	Comply with IEC 60950-1 or relevant component standard	(see appended table 1.5.1).	Pass
1.5.2	Evaluation and testing of components	- Certified components are used in accordance with their ratings, certifications and they comply with applicable parts of this Standard. - Components not certified are used in accordance with their ratings and they comply with applicable parts of IEC 60950-1 and the relevant component Standard. - Components, for which no relevant IEC Standard exist, have been tested under the conditions occurring in the equipment, using applicable parts of IEC 60950-1.	Pass
1.5.3	Thermal controls		N/A
1.5.4	Transformers		N/A
1.5.5	Interconnecting cables		N/A
1.5.6	Capacitors bridging insulation		N/A
1.5.7	Resistors bridging insulation		N/A
1.5.7.1	Resistors bridging functional, basic or supplementary insulation		N/A
1.5.7.2	Resistors bridging double or reinforced insulation between a.c. mains and other circuits		N/A
1.5.7.3	Resistors bridging double or reinforced insulation between a.c. mains and antenna or coaxial cable		N/A
1.5.8	Components in equipment for IT power systems		N/A
1.5.9	Surge suppressors		N/A
1.5.9.1	General		N/A
1.5.9.2	Protection of VDRs		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

1.5.9.3	Bridging of functional insulation by a VDR		N/A
1.5.9.4	Bridging of basic insulation by a VDR		N/A
1.5.9.5	Bridging of supplementary, double or reinforced insulation by a VDR		N/A

1.6	Power interface		Pass
1.6.1	AC power distribution systems		Pass
1.6.2	Input current	The steady state input current of the equipment did not exceed the RATED CURRENT by more than 10% under NORMAL LOAD. (see appended table 1.6.2).	Pass
1.6.3	Voltage limit of hand-held equipment		N/A
1.6.4	Neutral conductor		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7	Marking and instructions		Pass
1.7.1	Power rating and identification markings	Optional, rating marking readily visible to operator.	Pass
1.7.1.1	Power rating mark		Pass
	Multiple mains supply connections		N/A
	Rated voltage(s) or voltage range(s) (V) ..	(Optional) 12Vdc.	Pass
	Symbol for nature of supply, for d.c. only ..		N/A
	Rated frequency or rated frequency range (Hz)		N/A
	Rated current (mA or A)	(optional) (1). 1.29 A max. (2). 1.1 A max.	Pass
1.7.1.2	Identification markings		Pass
	Manufacturer's name or trademark or identification mark	AU Optronics Corp or E204356	Pass
	Model identification or type reference	G170EGZZ, G170ETNZZZZ (Z May be any alphanumeric character or blank for marketing purpose).	Pass
	Symbol for Class II equipment only		N/A
	Other markings and symbols.....		N/A
1.7.2	Safety instructions and marking	- Component suitable for factory assembly only. - Shall be evaluated in the end product.	N/A
1.7.2.1	General		N/A
1.7.2.2	Disconnect devices		N/A
1.7.2.3	Overcurrent protective device		N/A
1.7.2.4	IT Power distribution systems		N/A
1.7.2.5	Operator access with a tool		N/A
1.7.2.6	Ozone		N/A
1.7.3	Short duty cycles		N/A
1.7.4	Supply voltage adjustment		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Method and means of adjustment; reference to installation instructions		N/A
1.7.5	Power outlets on the equipment.....		N/A
1.7.6	Fuse identification (marking, special fusing characteristics, cross-reference)		N/A
1.7.7	Wiring terminals		N/A
1.7.7.1	Protective earthing and bonding terminals:		N/A
1.7.7.2	Terminals for a.c. mains supply conductors		N/A
1.7.7.3	Terminals for d.c. mains supply conductors		N/A
1.7.8	Controls and indicators		N/A
1.7.8.1	Identification, location and marking		N/A
1.7.8.2	Colours.....		N/A
1.7.8.3	Symbols according to IEC 60417		N/A
1.7.8.4	Markings using figures		N/A
1.7.9	Isolation of multiple power sources		N/A
1.7.10	Thermostats and other regulating devices:		N/A
1.7.11	Durability	All markings provided on UL Recognized Component labels suitable for surface they are applied upon and meet the durability test.	Pass
1.7.12	Removable parts		N/A
1.7.13	Replaceable batteries.....		N/A
	Language(s)		-
1.7.14	Equipment for restricted access locations :		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2	PROTECTION FROM HAZARDS		Pass
2.1	Protection from electric shock and energy hazards		N/A
2.1.1	Protection in operator access areas	The accessibility shall be evaluated in the end product.	N/A
2.1.1.1	Access to energized parts		N/A
	Test by inspection		N/A
	Test with test finger (Figure 2A)		N/A
	Test with test pin (Figure 2B)		N/A
	Test with test probe (Figure 2C)		N/A
2.1.1.2	Battery compartments		N/A
2.1.1.3	Access to ELV wiring	No internal wiring at ELV.	N/A
	Working voltage (V _{peak} or V _{rms}); minimum distance through insulation (mm)		-
2.1.1.4	Access to hazardous voltage circuit wiring	No internal wiring at hazardous voltage.	N/A
2.1.1.5	Energy hazards		N/A
2.1.1.6	Manual controls	The equipment does not contain any knobs, handles, levers, or the like.	N/A
2.1.1.7	Discharge of capacitors in equipment		N/A
	Measured voltage (V); time-constant (s) ..		-
2.1.1.8	Energy hazards - d.c. mains supply		N/A
	a) Capacitor connected to the d.c. mains supply.....		N/A
	b) Internal battery connected to the mains supply.....		N/A
2.1.1.9	Audio amplifiers.....		N/A
2.1.2	Protection in service access areas		N/A
2.1.3	Protection in restricted access locations		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

2.2	SELV circuits		Pass
2.2.1	General requirements	- Class III unit supplied by SELV and no hazardous voltage generated within unit. - SELV levels are maintained after single fault condition.	Pass
2.2.2	Voltages under normal conditions (V)	All accessible voltages are less than 42.4 Vp or 60 V dc and are classified as SELV.	Pass
2.2.3	Voltages under fault conditions (V)	Under fault conditions voltages never exceed 71V peak and 120 Vdc and do not exceed 42.4 Vpeak or 60 Vdc for more than 0.2 sec.	Pass
2.2.4	Connection of SELV circuits to other circuits	SELV circuits are only connected to other secondary circuits..	Pass

2.3	TNV circuits		N/A
2.3.1	Limits		N/A
	Type of TNV circuits		-
2.3.2	Separation from other circuits and from accessible parts		N/A
2.3.2.1	General requirements		N/A
2.3.2.2	Protection by basic insulation		N/A
2.3.2.3	Protection by earthing		N/A
2.3.2.4	Protection by other constructions		N/A
2.3.3	Separation from hazardous voltages		N/A
	Insulation employed		-
2.3.4	Connection of TNV circuits to other circuits		N/A
	Insulation employed		-
2.3.5	Test for operating voltages generated externally		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

2.4	Limited current circuits		N/A
2.4.1	General requirements		N/A
2.4.2	Limit values		N/A
	Frequency (Hz)		-
	Measured current (mA)		-
	Measured voltage (V)		-
	Measured circuit capacitance (nF or uF) ..		-
2.4.3	Connection of limited current circuits to other circuits		N/A

2.5	Limited power sources		N/A
	a) Inherently limited output		N/A
	b) Impedance limited output		N/A
	c) Regulating network limited output under normal operating and single fault condition		N/A
	d) Overcurrent protective device limited output		N/A
	Max. output voltage (V), max. output current (A), max. apparent power (VA).....		-
	Current rating of overcurrent protective device (A)		-
	Use of integrated circuit (IC) current limiters.....		-

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

2.6	Provisions for earthing and bonding		N/A
2.6.1	Protective earthing		N/A
2.6.2	Functional earthing		N/A
2.6.3	Protective earthing and protective bonding conductors		N/A
2.6.3.1	General		N/A
2.6.3.2	Size of protective earthing conductors		N/A
	Rated current (A), cross-sectional area (mm ²), AWG		-
2.6.3.3	Size of protective bonding conductors		N/A
	Rated current (A), cross-sectional area (mm ²), AWG		-
	Protective current rating (A), cross-sectional area (mm ²), AWG		-
2.6.3.4	Resistance of earthing conductors and their terminations; resistance (ohm), voltage drop (V), test current (A), duration (min)		N/A
2.6.3.5	Colour of insulation		N/A
2.6.4	Terminals		N/A
2.6.4.1	General		N/A
2.6.4.2	Protective earthing and bonding terminals		N/A
	Rated current (A), type, nominal thread diameter (mm)		-
2.6.4.3	Separation of the protective earthing conductor from protective bonding conductors		N/A
2.6.5	Integrity of protective earthing		N/A
2.6.5.1	Interconnection of equipment		N/A
2.6.5.2	Components in protective earthing conductors and protective bonding conductors		N/A
2.6.5.3	Disconnection of protective earth		N/A
2.6.5.4	Parts that can be removed by an operator		N/A
2.6.5.5	Parts removed during servicing		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

2.6.5.6	Corrosion resistance		N/A
2.6.5.7	Screws for protective bonding		N/A
2.6.5.8	Reliance on telecommunication network or cable distribution system		N/A

2.7	Overcurrent and earth fault protection in primary circuits		N/A
2.7.1	Basic requirements		N/A
	Instructions when protection relies on building installation		N/A
2.7.2	Faults not covered in 5.3.7		N/A
2.7.3	Short-circuit backup protection		N/A
2.7.4	Number and location of protective devices:		N/A
2.7.5	Protection by several devices		N/A
2.7.6	Warning to service personnel.....:		N/A

2.8	Safety interlocks		N/A
2.8.1	General principles		N/A
2.8.2	Protection requirements		N/A
2.8.3	Inadvertent reactivation		N/A
2.8.4	Fail-safe operation		N/A
	Protection against extreme hazard		N/A
2.8.5	Moving parts		N/A
2.8.6	Overriding		N/A
2.8.7	Switches, relays and their related circuits		N/A
2.8.7.1	Separation distances for contact gaps and their related circuits (mm).....:		N/A
2.8.7.2	Overload test		N/A
2.8.7.3	Endurance test		N/A
2.8.7.4	Electric strength test		N/A
2.8.8	Mechanical actuators		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

2.9	Electrical insulation		Pass
2.9.1	Properties of insulating materials	Natural rubber, materials containing asbestos and hygroscopic materials are not used as insulation.	N/A
2.9.2	Humidity conditioning		N/A
	Relative humidity (%), temperature (°C)....:		-
2.9.3	Grade of insulation	Functional (see 5.3.4 c)	Pass
2.9.4	Separation from hazardous voltages		N/A
	Method(s) used		-

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.10	Clearances, creepage distances and distances through insulation		Pass
2.10.1	General	- Pollution Degree 2 applicable. - For functional insulation, see 5.3.4.	Pass
2.10.1.1	Frequency		N/A
2.10.1.2	Pollution degrees	2	Pass
2.10.1.3	Reduced values for functional insulation		N/A
2.10.1.4	Intervening unconnected conductive parts		N/A
2.10.1.5	Insulation with varying dimensions		N/A
2.10.1.6	Special separation requirements		N/A
2.10.1.7	Insulation in circuits generating starting pulses		N/A
2.10.2	Determination of working voltage		Pass
2.10.2.1	General		Pass
2.10.2.2	RMS working voltage		Pass
2.10.2.3	Peak working voltage		Pass
2.10.3	Clearances	Class III product - secondary circuits comply with Subclause 5.3.4.	N/A
2.10.3.1	General		N/A
2.10.3.2	Mains transient voltages		N/A
	a) AC mains supply		N/A
	b) Earthed d.c. mains supplies		N/A
	c) Unearthed d.c. mains supplies		N/A
	d) Battery operation.....		N/A
2.10.3.3	Clearances in primary circuits		N/A
2.10.3.4	Clearances in secondary circuits	Class III product - secondary circuits comply with Subclause 5.3.4.	N/A
2.10.3.5	Clearances in circuits having starting pulses		N/A
2.10.3.6	Transients from a.c. mains supply		N/A
2.10.3.7	Transients from d.c. mains supply		N/A
2.10.3.8	Transients from telecommunication		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

	networks and cable distribution systems ..:		
2.10.3.9	Measurement of transient voltage levels		N/A
	a) Transients from a mains supply		N/A
	For an a.c. mains supply		N/A
	For a d.c. mains supply		N/A
	b) Transients from a telecommunication network		N/A
2.10.4	Creepage distances	See 5.3.4	N/A
2.10.4.1	General		N/A
2.10.4.2	Material group and comparative tracking index		N/A
	CTI tests		-
2.10.4.3	Minimum creepage distances		N/A
2.10.5	Solid insulation		N/A
2.10.5.1	General		N/A
2.10.5.2	Distances through insulation		N/A
2.10.5.3	Insulating compound as solid insulation		N/A
2.10.5.4	Semiconductor devices		N/A
2.10.5.5	Cemented joints		N/A
2.10.5.6	Thin sheet material - General		N/A
2.10.5.7	Separable thin sheet material		N/A
	Number of layers (pcs)		-
2.10.5.8	Non-separable thin sheet material		N/A
2.10.5.9	Thin sheet material - standard test procedure		N/A
	Electric strength test		-
2.10.5.10	Thin sheet material - alternative test procedure		N/A
	Electric strength test		-
2.10.5.11	Insulation in wound components		N/A
2.10.5.12	Wire in wound components		N/A
	Working voltage		N/A
	a) Basic insulation not under stress		N/A
	b) Basic, supplementary, reinforced		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

	insulation		
	c) Compliance with Annex U		N/A
	Two wires in contact inside wound component; angle between 45° and 90° ...		N/A
2.10.5.13	Wire with solvent-based enamel in wound components		N/A
	Electric strength test.....		-
	Routine test		N/A
2.10.5.14	Additional insulation in wound components		N/A
	Working voltage		N/A
	- Basic insulation not under stress		N/A
	- Supplementary, reinforced insulation		N/A
2.10.6	Construction of printed boards		N/A
2.10.6.1	Uncoated printed boards		N/A
2.10.6.2	Coated printed boards		N/A
2.10.6.3	Insulation between conductors on the same inner surface of a printed board		N/A
2.10.6.4	Insulation between conductors on different layers of a printed board		N/A
	Distance through insulation		N/A
	Number of insulation layers (pcs)		N/A
2.10.7	Component external terminations		N/A
2.10.8	Tests on coated printed boards and coated components		N/A
2.10.8.1	Sample preparation and preliminary inspection		N/A
2.10.8.2	Thermal conditioning		N/A
2.10.8.3	Electric strength test		N/A
2.10.8.4	Abrasion resistance test		N/A
2.10.9	Thermal cycling		N/A
2.10.10	Test for Pollution Degree 1 environment and insulating compound		N/A
2.10.11	Tests for semiconductor devices and cemented joints		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

2.10.12	Enclosed and sealed parts		N/A
---------	---------------------------	--	-----

3	WIRING, CONNECTIONS AND SUPPLY		Pass
3.1	General		Pass
3.1.1	Current rating and overcurrent protection		N/A
3.1.2	Protection against mechanical damage		N/A
3.1.3	Securing of internal wiring		N/A
3.1.4	Insulation of conductors	Supplied by SELV.	Pass
3.1.5	Beads and ceramic insulators		N/A
3.1.6	Screws for electrical contact pressure		N/A
3.1.7	Insulating materials in electrical connections		N/A
3.1.8	Self-tapping and spaced thread screws		N/A
3.1.9	Termination of conductors	To be evaluated in the end product.	N/A
	10 N pull test		N/A
3.1.10	Sleeving on wiring		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

3.2	Connection to mains supply		N/A
3.2.1	Means of connection		N/A
3.2.1.1	Connection to an a.c. mains supply		N/A
3.2.1.2	Connection to a d.c. mains supply		N/A
3.2.2	Multiple supply connections		N/A
3.2.3	Permanently connected equipment		N/A
	Number of conductors, diameter of cable and conduits (mm)		-
3.2.4	Appliance inlets		N/A
3.2.5	Power supply cords		N/A
3.2.5.1	AC power supply cords		N/A
	Type		-
	Rated current (A), cross-sectional area (mm ²), AWG		-
3.2.5.2	DC power supply cords		N/A
3.2.6	Cord anchorages and strain relief		N/A
	Mass of equipment (kg), pull (N)		-
	Longitudinal displacement (mm)		-
3.2.7	Protection against mechanical damage		N/A
3.2.8	Cord guards		N/A
	Diameter of minor dimension D (mm); test mass (g)		-
	Radius of curvature of cord (mm)		-
3.2.9	Supply wiring space		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

3.3	Wiring terminals for connection of external conductors		N/A
3.3.1	Wiring terminals		N/A
3.3.2	Connection of non-detachable power supply cords		N/A
3.3.3	Screw terminals		N/A
3.3.4	Conductor sizes to be connected		N/A
	Rated current (A), cord/cable type, cross-sectional area (mm ²)		-
3.3.5	Wiring terminal sizes		N/A
	Rated current (A), type and nominal thread diameter (mm)		-
3.3.6	Wiring terminals design		N/A
3.3.7	Grouping of wiring terminals		N/A
3.3.8	Stranded wire		N/A

3.4	Disconnection from the mains supply		N/A
3.4.1	General requirement		N/A
3.4.2	Disconnect devices		N/A
3.4.3	Permanently connected equipment		N/A
3.4.4	Parts which remain energized		N/A
3.4.5	Switches in flexible cords		N/A
3.4.6	Number of poles - single-phase and d.c. equipment		N/A
3.4.7	Number of poles - three-phase equipment		N/A
3.4.8	Switches as disconnect devices		N/A
3.4.9	Plugs as disconnect devices		N/A
3.4.10	Interconnected equipment		N/A
3.4.11	Multiple power sources		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

3.5	Interconnection of equipment		Pass
3.5.1	General requirements		Pass
3.5.2	Types of interconnection circuits:	Interconnection circuits are SELV CIRCUITS.	Pass
3.5.3	ELV circuits as interconnection circuits		N/A
3.5.4	Data ports for additional equipment		N/A

4	PHYSICAL REQUIREMENTS		Pass
4.1	Stability		N/A
	Angle of 10°	To be evaluated in end product.	N/A
	Test force (N):		N/A

4.2	Mechanical strength		N/A
4.2.1	General	To be evaluated in end product.	N/A
	Rack-mounted equipment		N/A
4.2.2	Steady force test, 10 N		N/A
4.2.3	Steady force test, 30 N		N/A
4.2.4	Steady force test, 250 N		N/A
4.2.5	Impact test		N/A
	Fall test		N/A
	Swing test		N/A
4.2.6	Drop test; height (mm).....:		N/A
4.2.7	Stress relief test		N/A
4.2.8	Cathode ray tubes		N/A
	Picture tube separately certified:		N/A
4.2.9	High pressure lamps		N/A
4.2.10	Wall or ceiling mounted equipment; force (N):		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.3	Design and construction		Pass
4.3.1	Edges and corners		Pass
4.3.2	Handles and manual controls; force (N) ...:		N/A
4.3.3	Adjustable controls		N/A
4.3.4	Securing of parts		N/A
4.3.5	Connection by plugs and sockets		N/A
4.3.6	Direct plug-in equipment		N/A
	Torque		N/A
	Compliance with the relevant mains plug standard		N/A
4.3.7	Heating elements in earthed equipment		N/A
4.3.8	Batteries		N/A
	- Overcharging of a rechargeable battery		N/A
	- Unintentional charging of a non-rechargeable battery		N/A
	- Reverse charging of a rechargeable battery		N/A
	- Excessive discharging rate for any battery		N/A
4.3.9	Oil and grease		N/A
4.3.10	Dust, powders, liquids and gases		N/A
4.3.11	Containers for liquids or gases		N/A
4.3.12	Flammable liquids		N/A
	Quantity of liquid (l)		N/A
	Flash point (°C)		N/A
4.3.13	Radiation		Pass
4.3.13.1	General		N/A
4.3.13.2	Ionizing radiation		N/A
	Measured radiation (pA/kg)		-
	Measured high-voltage (kV)		-
	Measured focus voltage (kV).....		-
	CRT markings		-

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.3.13.3	Effect of ultraviolet (UV) radiation on materials		N/A
	Part, property, retention after test, flammability classification		N/A
4.3.13.4	Human exposure to ultraviolet (UV) radiation		N/A
4.3.13.5	Lasers (including laser diodes) and LEDs	See below	Pass
4.3.13.5.1	Lasers (including laser diodes)		N/A
	Laser class		-
4.3.13.5.2	Light emitting diodes (LEDs)	LCD Panel base on LED backlight, the luminance is far less than 10000 cd/m ² . With reference to sub clause 4.1 of IEC 62471:2006 no further test is necessary.	Pass
4.3.13.6	Other types.....		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

4.4	Protection against hazardous moving parts		N/A
4.4.1	General		N/A
4.4.2	Protection in operator access areas		N/A
	Household and home/office document/media shredders		N/A
4.4.3	Protection in restricted access locations ..		N/A
4.4.4	Protection in service access areas		N/A
4.4.5	Protection against moving fan blades		N/A
4.4.5.1	General		N/A
	Not considered to cause pain or injury. a) :		N/A
	Is considered to cause pain, not injury. b) :		N/A
	Considered to cause injury. c)		N/A
4.4.5.2	Protection for users		N/A
	Use of symbol or warning		N/A
4.4.5.3	Protection for service persons		N/A
	Use of symbol or warning		N/A

4.5	Thermal requirements		Pass
4.5.1	General		Pass
4.5.2	Temperature tests	(see appended table 4.5).	Pass
	Normal load condition per Annex L	With screen full raster, maximum brightness and contrast and operated continuously .	-
4.5.3	Temperature limits for materials	Permitted rises based on manufacturer's specified Tma of 50 degree C	Pass
4.5.4	Touch temperature limits		Pass
4.5.5	Resistance to abnormal heat		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

4.6	Openings in enclosures		N/A
4.6.1	Top and side openings	To be determined in end use.	N/A
	Dimensions (mm)		-
4.6.2	Bottoms of fire enclosures	To be determined in end use.	N/A
	Construction of the bottom, dimensions (mm).....		-
4.6.3	Doors or covers in fire enclosures		N/A
4.6.4	Openings in transportable equipment		N/A
4.6.4.1	Constructional design measures		N/A
	Dimensions (mm)		-
4.6.4.2	Evaluation measures for larger openings		N/A
4.6.4.3	Use of metallized parts		N/A
4.6.5	Adhesives for constructional purposes		N/A
	Conditioning temperature (°C), time (weeks).....		-

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

4.7	Resistance to fire		Pass
4.7.1	Reducing the risk of ignition and spread of flame		Pass
	Method 1, selection and application of components wiring and materials		Pass
	Method 2, application of all of simulated fault condition tests		N/A
4.7.2	Conditions for a fire enclosure	Shall be evaluated in the end product.	N/A
4.7.2.1	Parts requiring a fire enclosure		N/A
4.7.2.2	Parts not requiring a fire enclosure		N/A
4.7.3	Materials		Pass
4.7.3.1	General		Pass
4.7.3.2	Materials for fire enclosures	See 4.7.2	N/A
4.7.3.3	Materials for components and other parts outside fire enclosures		N/A
4.7.3.4	Materials for components and other parts inside fire enclosures	- All internal materials are min. V-2 or are mounted on a PWB min. V-1; - All Internal wiring is insulated with PVC, TFE, PTFE, FEP, neoprene, polyimide or rated "VW-1" or "FT-1" or better;	Pass
4.7.3.5	Materials for air filter assemblies		N/A
4.7.3.6	Materials used in high-voltage components		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

5	ELECTRICAL REQUIREMENTS AND SIMULATED ABNORMAL CONDITIONS		Pass
5.1	Touch current and protective conductor current		N/A
5.1.1	General		N/A
5.1.2	Configuration of equipment under test (EUT)		N/A
5.1.2.1	Single connection to an a.c. mains supply		N/A
5.1.2.2	Redundant multiple connections to an a.c. mains supply		N/A
5.1.2.3	Simultaneous multiple connections to an a.c. mains supply		N/A
5.1.3	Test circuit		N/A
5.1.4	Application of measuring instrument		N/A
5.1.5	Test procedure		N/A
5.1.6	Test measurements		N/A
	Supply voltage (V)		-
	Measured touch current (mA).....		-
	Max. allowed touch current (mA).....		-
	Measured protective conductor current (mA)		-
	Max. allowed protective conductor current (mA)		-
5.1.7	Equipment with touch current exceeding 3,5 mA		N/A
5.1.7.1	General		N/A
5.1.7.2	Simultaneous multiple connections to the supply		N/A
5.1.8	Touch currents to telecommunication networks and cable distribution systems and from telecommunication networks		N/A
5.1.8.1	Limitation of the touch current to a telecommunication network or to a cable distribution system		N/A
	Supply voltage (V)		-
	Measured touch current (mA).....		-
	Max. allowed touch current (mA).....		-
5.1.8.2	Summation of touch currents from		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

	telecommunication networks		
	a) EUT with earthed telecommunication ports		N/A
	b) EUT whose telecommunication ports have no reference to protective earth		N/A

5.2	Electric strength		N/A
5.2.1	General	Class III equipment.	N/A
5.2.2	Test procedure		N/A

5.3	Abnormal operating and fault conditions		Pass
5.3.1	Protection against overload and abnormal operation		N/A
5.3.2	Motors		N/A
5.3.3	Transformers		N/A
5.3.4	Functional insulation	Functional insulation shall comply with the requirements (c).	Pass
5.3.5	Electromechanical components		N/A
5.3.6	Audio amplifiers in ITE		N/A
5.3.7	Simulation of faults	Necessity of testing and compliance of evaluation shall be investigated in the end product.	N/A
5.3.8	Unattended equipment		N/A
5.3.9	Compliance criteria for abnormal operating and fault conditions		N/A
5.3.9.1	During the tests		N/A
5.3.9.2	After the tests		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

6	CONNECTION TO TELECOMMUNICATION NETWORKS		N/A
6.1	Protection of telecommunication network service persons, and users of other equipment connected to the network, from hazards in the equipment		N/A
6.1.1	Protection from hazardous voltages		N/A
6.1.2	Separation of the telecommunication network from earth		N/A
6.1.2.1	Requirements		N/A
	Supply voltage (V)		-
	Current in the test circuit (mA)		-
6.1.2.2	Exclusions		N/A

6.2	Protection of equipment users from overvoltages on telecommunication networks		N/A
6.2.1	Separation requirements		N/A
6.2.2	Electric strength test procedure		N/A
6.2.2.1	Impulse test		N/A
6.2.2.2	Steady-state test		N/A
6.2.2.3	Compliance criteria		N/A

6.3	Protection of the telecommunication wiring system from overheating		N/A
	Max. output current (A)		-
	Current limiting method		-

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

7	CONNECTION TO CABLE DISTRIBUTION SYSTEMS		N/A
7.1	General		N/A
7.2	Protection of cable distribution system service persons, and users of other equipment connected to the system, from hazardous voltages in the equipment		N/A
7.3	Protection of equipment users from overvoltages on the cable distribution system		N/A
7.4	Insulation between primary circuits and cable distribution systems		N/A
7.4.1	General		N/A
7.4.2	Voltage surge test		N/A
7.4.3	Impulse test		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

A	ANNEX A, TESTS FOR RESISTANCE TO HEAT AND FIRE		N/A
A.1	Flammability test for fire enclosures of movable equipment having a total mass exceeding 18 kg, and of stationary equipment (see 4.7.3.2)		N/A
A.1.1	Samples		-
	Wall thickness (mm)		-
A.1.2	Conditioning of samples; temperature (°C)		N/A
A.1.3	Mounting of samples		N/A
A.1.4	Test flame (see IEC 60695-11-3)		N/A
	Flame A, B, C or D		N/A
A.1.5	Test procedure		N/A
A.1.6	Compliance criteria		N/A
	Sample 1 burning time (s)		-
	Sample 2 burning time (s)		-
	Sample 3 burning time (s)		-
A.2	Flammability test for fire enclosures of movable equipment having a total mass not exceeding 18 kg, and for material and components located inside fire enclosures (see 4.7.3.2 and 4.7.3.4)		N/A
A.2.1	Samples, material		-
	Wall thickness (mm)		-
A.2.2	Conditioning of samples; temperature (°C)		N/A
A.2.3	Mounting of samples		N/A
A.2.4	Test flame (see IEC 60695-11-4)		N/A
	Flame A, B or C		-
A.2.5	Test procedure		N/A
A.2.6	Compliance criteria		N/A
	Sample 1 burning time (s)		-
	Sample 2 burning time (s)		-
	Sample 3 burning time (s)		-
A.2.7	Alternative test acc. to IEC 60695-11-5, cl. 5 and 9		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

	Sample 1 burning time (s)		-
	Sample 2 burning time (s)		-
	Sample 3 burning time (s)		-
A.3	Hot flaming oil test (see 4.6.2)		N/A
A.3.1	Mounting of samples		N/A
A.3.2	Test procedure		N/A
A.3.3	Compliance criterion		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

B	ANNEX B, MOTOR TESTS UNDER ABNORMAL CONDITIONS (see 4.7.2.2 and 5.3.2)		N/A
B.1	General requirements		N/A
	Position		-
	Manufacturer		-
	Type		-
	Rated values		-
B.2	Test conditions		N/A
B.3	Maximum temperatures		N/A
B.4	Running overload test		N/A
B.5	Locked-rotor overload test		N/A
	Test duration (days)		-
	Electric strength test: test voltage (V).....		-
B.6	Running overload test for d.c. motors in secondary circuits		N/A
B.6.1	General		N/A
B.6.2	Test procedure		N/A
B.6.3	Alternative test procedure		N/A
B.6.4	Electric strength test; test voltage (V).....		N/A
B.7	Locked-rotor overload test for d.c. motors in secondary circuits		N/A
B.7.1	General		N/A
B.7.2	Test procedure		N/A
B.7.3	Alternative test procedure		N/A
B.7.4	Electric strength test; test voltage (V).....		N/A
B.8	Test for motors with capacitors		N/A
B.9	Test for three-phase motors		N/A
B.10	Test for series motors		N/A
	Operating voltage (V)		-

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

C	ANNEX C, TRANSFORMERS (see 1.5.4 and 5.3.3)		N/A
	Position		-
	Manufacturer		-
	Type		-
	Rated values		-
	Method of protection		-
C.1	Overload test		N/A
C.2	Insulation		N/A
	Protection from displacement of windings :		N/A

D	ANNEX D, MEASURING INSTRUMENTS FOR TOUCH-CURRENT TESTS (see 5.1.4)		N/A
D.1	Measuring instrument		N/A
D.2	Alternative measuring instrument		N/A

E	ANNEX E, TEMPERATURE RISE OF A WINDING (see 1.4.13)		N/A
----------	--	--	------------

F	ANNEX F, MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES (see 2.10 and Annex G)		Pass
----------	---	--	-------------

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

G	ANNEX G, ALTERNATIVE METHOD FOR DETERMINING MINIMUM CLEARANCES		N/A
G.1	Clearances		N/A
G.1.1	General		N/A
G.1.2	Summary of the procedure for determining minimum clearances		N/A
G.2	Determination of mains transient voltage (V)		N/A
G.2.1	AC mains supply		N/A
G.2.2	Earthed d.c. mains supply		N/A
G.2.3	Unearthed d.c. mains supply		N/A
G.2.4	Battery operation		N/A
G.3	Determination of telecommunication network transient voltage (V)		N/A
G.4	Determination of required withstand voltage (V)		N/A
G.4.1	Mains transients and internal repetitive peaks		N/A
G.4.2	Transients from telecommunication networks		N/A
G.4.3	Combination of transients		N/A
G.4.4	Transients from cable distribution systems		N/A
G.5	Measurement of transient voltages (V)		N/A
	a) Transients from a mains supply		N/A
	For an a.c. mains supply		N/A
	For a d.c. mains supply		N/A
	b) Transients from a telecommunication network		N/A
G.6	Determination of minimum clearances		N/A

H	ANNEX H, IONIZING RADIATION (see 4.3.13)		N/A
----------	---	--	-----

J	ANNEX J, TABLE OF ELECTROCHEMICAL POTENTIALS (see 2.6.5.6)		N/A
	Metal(s) used		-

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

K	ANNEX K, THERMAL CONTROLS (see 1.5.3 and 5.3.8)		N/A
K.1	Making and breaking capacity		N/A
K.2	Thermostat reliability; operating voltage (V)		N/A
K.3	Thermostat endurance test; operating voltage (V)		N/A
K.4	Temperature limiter endurance; operating voltage (V)		N/A
K.5	Thermal cut-out reliability		N/A
K.6	Stability of operation		N/A

L	ANNEX L, NORMAL LOAD CONDITIONS FOR SOME TYPES OF ELECTRICAL BUSINESS EQUIPMENT (see 1.2.2.1 and 4.5.2)		Pass
L.1	Typewriters		N/A
L.2	Adding machines and cash registers		N/A
L.3	Erasers		N/A
L.4	Pencil sharpeners		N/A
L.5	Duplicators and copy machines		N/A
L.6	Motor-operated files		N/A
L.7	Other business equipment		Pass

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

M	ANNEX M, CRITERIA FOR TELEPHONE RINGING SIGNALS (see 2.3.1)		N/A
M.1	Introduction		N/A
M.2	Method A		N/A
M.3	Method B		N/A
M.3.1	Ringling signal		N/A
M.3.1.1	Frequency (Hz)		-
M.3.1.2	Voltage (V)		-
M.3.1.3	Cadence; time (s), voltage (V).....		-
M.3.1.4	Single fault current (mA).....		-
M.3.2	Tripping device and monitoring voltage		N/A
M.3.2.1	Conditions for use of a tripping device or a monitoring voltage		N/A
M.3.2.2	Tripping device		N/A
M.3.2.3	Monitoring voltage (V)		N/A

N	ANNEX N, IMPULSE TEST GENERATORS (see 1.5.7.2, 1.5.7.3, 2.10.3.9, 6.2.2.1, 7.3.2, 7.4.3 and Clause G.5)		N/A
N.1	ITU-T impulse test generators		N/A
N.2	IEC 60065 impulse test generator		N/A

P	ANNEX P, NORMATIVE REFERENCES		Pass
---	--------------------------------------	--	------

Q	ANNEX Q, Voltage dependent resistors (VDRs) (see 1.5.9.1)		N/A
	a) Preferred climatic categories.....		N/A
	b) Maximum continuous voltage.....		N/A
	c) Pulse current		N/A

R	ANNEX R, EXAMPLES OF REQUIREMENTS FOR QUALITY CONTROL PROGRAMMES		N/A
R.1	Minimum separation distances for unpopulated coated printed boards (see 2.10.6.2)		N/A
R.2	Reduced clearances (see 2.10.3)		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
S	ANNEX S, PROCEDURE FOR IMPULSE TESTING (see 6.2.2.3)		N/A
S.1	Test equipment		N/A
S.2	Test procedure		N/A
S.3	Examples of waveforms during impulse testing		N/A
T	ANNEX T, GUIDANCE ON PROTECTION AGAINST INGRESS OF WATER (see 1.1.2)		N/A
	:		-
U	ANNEX U, INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION (see 2.10.5.4)		N/A
	:		-
V	ANNEX V, AC POWER DISTRIBUTION SYSTEMS (see 1.6.1)		N/A
V.1	Introduction		N/A
V.2	TN power distribution systems		N/A
W	ANNEX W, SUMMATION OF TOUCH CURRENTS		N/A
W.1	Touch current from electronic circuits		N/A
W.1.1	Floating circuits		N/A
W.1.2	Earthed circuits		N/A
W.2	Interconnection of several equipments		N/A
W.2.1	Isolation		N/A
W.2.2	Common return, isolated from earth		N/A
W.2.3	Common return, connected to protective earth		N/A
X	ANNEX X, MAXIMUM HEATING EFFECT IN TRANSFORMER TESTS (see clause C.1)		N/A
X.1	Determination of maximum input current		N/A
X.2	Overload test procedure		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

Y	ANNEX Y, ULTRAVIOLET LIGHT CONDITIONING TEST (see 4.3.13.3)		N/A
Y.1	Test apparatus		N/A
Y.2	Mounting of test samples		N/A
Y.3	Carbon-arc light-exposure apparatus		N/A
Y.4	Xenon-arc light-exposure apparatus		N/A

Z	ANNEX Z, OVERVOLTAGE CATEGORIES (see 2.10.3.2 and Clause G.2)		N/A
---	--	--	-----

AA	ANNEX AA, MANDREL TEST (see 2.10.5.8)		N/A
----	--	--	-----

BB	ANNEX BB, CHANGES IN THE SECOND EDITION		N/A
----	--	--	-----

CC	ANNEX CC, EVALUATION OF INTEGRATED CIRCUIT (IC) CURRENT LIMITERS		N/A
CC.1	General		N/A
CC.2	Test program 1		N/A
CC.3	Test program 2		N/A

DD	ANNEX DD, REQUIREMENTS FOR THE MOUNTING MEANS OF RACK-MOUNTED EQUIPMENT		N/A
DD.1	General		N/A
DD.2	Mechanical strength test, variable N		N/A
DD.3	Mechanical strength test, 250 N, including end stops		N/A
DD.4	Compliance		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

EE	ANNEX EE, HOUSEHOLD AND HOME/OFFICE DOCUMENT/MEDIA SHREDDERS		N/A
EE.1	General		N/A
EE.2	Markings and instructions		N/A
	Use of markings or symbols		N/A
	Information of user instructions, maintenance and/or servicing instructions:		N/A
EE.3	Inadvertent reactivation test		N/A
EE.4	Disconnection of power to hazardous moving parts		N/A
	Use of markings or symbols		N/A
EE.5	Protection against hazardous moving parts		N/A
	Test with test finger (Figure 2A)		N/A
	Test with wedge probe (Figure EE1 and EE2)		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

1.5.1	TABLE: list of critical components					Pass
object/part or Description	manufacturer/ trademark	type/model	technical data	standard (Edition or year)	mark(s) of conformity ¹⁾	
01. Panel	AU Optronics Corp.	--	TFT Type, 17"	--	--, --	
02. Chassis	--	--	Sheet metal.	--	--, --	
03. PWB	Interchangeable	Interchangeable	Minimum V-1 or better, 105 degree C.	UL 796	UL, --	
04. Internal Wiring (Optional)	Interchangeable	Interchangeable	FEP, PTFE, PVC, TFE, neoprene, polyimide or rated VW-1; minimum 30 V, 105 degree C.	UL 758	UL, --	
05. Connectors and Receptacles (Secondary SELV circuits)	Interchangeable	Interchangeable	--	UL 498, UL 1977.	UL, --	
05a. Connectors and Receptacles (Secondary ELV/SELV circuits)(alternate)	--	Metal/ Plastic	Copper alloy pins housed in bodies of plastic rated V-2 min.	UL 94	UL, --	
06. Flexible PWBs (Optional)	Interchangeable	Interchangeable	Min V-1 or VTM-1, 80 degree C for component mounted. Min V-2 or VTM-2, 80 degree C for no component mounted.	UL 796F, UL 796, UL 94, UL 746E	UL, --	
07. Label	Interchangeable	Interchangeable	Min. 60 degree C. Suitable for applied surface.	UL 969	UL, --	
08. Metal Cover for drive board (Optional)	--	--	Metallic	--	--, --	
09. LED backlight driver with control board	AU Optronics Corp.	G170EG%% (% may be 0-9, A-Z or blank)	I/P: 12Vdc, 1.29A max	--	--, --	
09a. LED backlight driver with control board (Alternate)	AU Optronics Corp.	G170ETN%% (% may be 0-9, A-Z or blank)	I/P: 12Vdc, 0.8A typ.	--	--, --	

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

Supplementary information:

¹⁾ Provided evidence ensures the agreed level of compliance. See OD-CB2039.

The CBTL has verified the component information.

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

1.5.1	TABLE: Opto Electronic Devices			N/A
Manufacturer.....:				
Type.....:				
Separately tested.....:				
Bridging insulation.....:				
External creepage distance.....:				
Internal creepage distance.....:				
Distance through insulation.....:				
Tested under following conditions.....:				
Input.....:				
Output.....:				
supplementary information:				
Additional devices may be described in Enclosure - Miscellaneous				

1.6.2	TABLE: electrical data (in normal conditions)					Pass
U (V)	I (A)	I rated (A)	P (W)	Fuse #	I fuse (A)	condition/status
--	--	--	--	--	--	Test with LED driver board, Mfr: AUO, P/N: G170EG%% (% may be 0-9, A-Z or blank)
12 Vdc	1.2	1.29	14.4	--	--	With screen full raster, maximum brightness and contrast and operated continuously
--	--	--	--	--	--	Test with LED drive board, Mfr: AUO, P/N: G170ETN%% (may be 0-9, A-Z or blank)
12 Vdc	0.58	0.8	6.96	--	--	With screen full raster, maximum brightness and contrast and operated continuously
supplementary information:						

2.1.1.5 c) 1)	TABLE: Max. V, A, VA test				N/A
Voltage(rated) (V)	Current(rated) (A)	Voltage (max.) (V)	Current (max.) (A)	VA (max.) (VA)	
supplementary information:					

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

2.1.1.5 c) 2)	TABLE: Stored energy		N/A
Capacitance C (μF)	Voltage U (V)	Energy E (J)	
supplementary information:			

2.2	TABLE: Evaluation of voltage limiting components in SELV circuits			Pass
Component (measured between)		max. voltage (V) (normal operation)		Voltage Limiting Components
		V Peak	V d.c.	
--		--	--	Test with LED drive board, Mfr: AUO, P/N: G170ETN%%%% (% may be 0-9, A-Z or blank)
V_OUT to Earth		--	24.8	--
Metal Chassis to Earth		0.14	--	--
--		--	--	Test with LED driver board, Mfr: AUO, P/N: G170EG%% (% may be 0-9, A-Z or blank)
Before L5 to Return		11.8	--	--
After L5 to Return		23.4	--	--
After D9		22.8	--	--
Fault test performed on voltage limiting components		Voltage measured (V) in SELV circuits (V peak or V d.c.)		
--		For LED drive board, Mfr: AUO, P/N: G170ETN%%%% (% may be 0-9, A-Z or blank)		
L502 p1-p2 short		V_OUT-GND: 0 V (#0)		
D502 short		V_OUT-GND: 0 V (#0)		
R510 short		V_OUT-GND: 0 V (#0)		
R513 short		V_OUT-GND: 0 V (#0)		
V_OUT-GND short		F501 open (#0)		
supplementary information:				
#0: Shutdown immediately				

2.5	TABLE: limited power sources			N/A
Circuit output tested:				
Measured Uoc (V) with all load circuits disconnected:				
Components/Sample No./Uoc(V)	Isc (A)		VA	
	Meas.	Limit	Meas.	Limit
Normal condition				
Single fault: _____				
supplementary information:				
Sc=short circuit, Oc=Open circuit				

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

2.10.2	TABLE: working voltage measurement				Pass
Location		RMS Voltage (V)	Peak voltage (V)	Comments	
--		--	--	--	
supplementary information:					
--					

2.10.3 and 2.10.4	TABLE: clearance and creepage distance measurements						Pass
Clearance (cl) and creepage distance (cr) at/of/between:	U peak (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	Required cr (mm)	cr (mm)	
--	--	--	--	--	--	--	
Functional:							
Clearance (cl) and creepage distance (cr) at/of/between:	U peak (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	Required cr (mm)	cr (mm)	
--	--	--	--	--	--	--	
Basic/supplementary:							
Clearance (cl) and creepage distance (cr) at/of/between:	U peak (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	Required cr (mm)	cr (mm)	
--	--	--	--	--	--	--	
Reinforced:							
Clearance (cl) and creepage distance (cr) at/of/between:	U peak (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	Required cr (mm)	cr (mm)	
--	--	--	--	--	--	--	
supplementary information:							
Functiona insulation complies with clause 5.3.4 c)							

2.10.5	TABLE: distance through insulation measurements					N/A
Distance through insulation (DTI) at/of:	U peak (V)	Urms (V)	Test voltage (V)	Required DTI (mm)	DTI (mm)	
supplementary information:						

4.3.8	TABLE: Batteries									N/A
The tests of 4.3.8 are applicable only when appropriate battery data is not available.										
Is it possible to install the battery in a reverse polarity position?										
	Non-rechargeable batteries			Rechargeable batteries						
	Discharging		Un-intentional charging	Charging		Discharging		Reversed charging		
	Meas. current	Manuf. specs.		Meas. current	Manuf. specs.	Meas. current	Manuf. specs.	Meas. current	Manuf. specs.	

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

Max. current during normal operation									
Max. current during fault operation									
Test results:									Verdict
- Chemical leaks									
- Explosion of the battery									
- Emission of flame or expulsion of molten metal									
- Electric strength tests of equipment after completion of tests									
supplementary information:									

4.3.8	TABLE: Batteries	N/A							
Battery Category (Lithium, NiMh, NiCad, Lithium ion, etc.).....:									
Manufacturer.....:									
Type/Model.....:									
Voltage.....:									
Capacity (mAh).....:									
Tested and Certified by (incl. Ref. No.).....:									
Circuit protection diagram (Refer indicated supplement of Enclosure-Miscellaneous).....:									
MARKINGS AND INSTRUCTIONS (1.7.12, 1.7.15)									
Location of replaceable battery.....:									
Language(s).....:									
Close to the battery.....:									
In the servicing instructions.....:									
In the operating instructions.....:									
In the operating instructions									
supplementary information:									
Additional devices may be described in Enclosure - Miscellaneous									

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

4.5	TABLE: Thermal requirements						Pass
	Supply voltage (V)..... :	see below	--	--	--	--	—
	Ambient Tmin (°C) :	See below	--	--	--	--	—
	Ambient Tmax (°C) :	--	--	--	--	--	—
Maximum measured temperature T of part/at:		T (°C)					allowed Tmax (°C)
Supply voltage		12Vdc	--	--	--	--	--
--		--	--	--	--	--	Test with LED driver board, Mfr: AUO, P/N: G170EG %% (% may be 0-9, A-Z or blank)
CH1:U710		48.9	75.5	--	--	--	105
CH2:U711		46.5	73.1	--	--	--	105
CH3:PCB near U711		45.7	72.3	--	--	--	105
CH4:U713		52.2	78.8	--	--	--	105
CH5:U703		53.8	80.4	--	--	--	105
CH6:PCB near U703		56.0	82.6	--	--	--	105
CH7:L5		61.6	88.2	--	--	--	105
CH8:D9		52.6	79.2	--	--	--	105
CH9:C754		44.8	71.4	--	--	--	85
CH10:Panel Internal Metal Part		45.5	72.1	--	--	--	--
CH11:Panel External Surface		29.3	55.9	--	--	--	80
CH12:Ambient		23.4	50.0	--	--	--	--
--		--	--	--	--	--	Test with LED drive board, Mfr: AUO, P/N: G170ET N%% % (% may be 0-9, A-Z or blank)
L502		43.7	71.6	--	--	--	105

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

C509			38.8	66.7	--	--	--	85
D502			40.2	68.1	--	--	--	105
Internal Metal Part			32.6	60.5	--	--	--	--
External Panel Surface(Left)			28.7	56.6	--	--	--	80
External Panel Surface(Right)			27.3	55.2	--	--	--	80
Ambient			22.1	Shift to 50	--	--	--	--
temperature T of winding:	t ₁ (°C)	R ₁ (Ω)	t ₂ (°C)	R ₂ (Ω)	T (°C)	allowed T _{max} (°C)	insulation class	
--	--	--	--	--	--	--	--	

supplementary information:

- The temperatures were measured under worst case normal mode defined in 1.2.2.1 and described in 1.6.2 at voltages as described in 1.4.5. - Without specified ambient temperature in users manual, therefore the ambient temperature assumed as 50 degree C.

4.5.5	TABLE: Ball pressure test of thermoplastic parts			N/A
	allowed impression diameter (mm) :			—
part		test temperature (°C)	impression diameter (mm)	
supplementary information:				

4.7	TABLE: resistance to fire					Pass
part		manufacturer of material	type of material	thickness (mm)	flammability class	Evidence
--		--	--	--	--	
supplementary information:						
- Fire enclosure is to be evaluated in end products. - See clause 4.7.						

5.1	TABLE: touch current measurement				N/A
Measured between:		Measured (mA)	Limit (mA)	Comments/Conditions	
supplementary information:					

5.2	TABLE: electric strength tests, impulse tests and voltage surge tests			N/A
Test voltage applied between:	Voltage shape (AC, DC, impulse, surge)	Test voltage (V)	Breakdown Yes / No	

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

Functional:			
Test voltage applied between:	Voltage shape (AC, DC, impulse, surge)	Test voltage (V)	Breakdown Yes / No
Basic/supplementary:			
Test voltage applied between:	Voltage shape (AC, DC, impulse, surge)	Test voltage (V)	Breakdown Yes / No
Reinforced:			
Test voltage applied between:	Voltage shape (AC, DC, impulse, surge)	Test voltage (V)	Breakdown Yes / No
supplementary information:			

5.3	TABLE: fault condition tests					N/A
	ambient temperature (° C)					—
	Power source for EUT: Manufacturer, model/type, output rating					—
Component No.	Fault	Supply voltage (V)	Test time	Fuse #	Fuse current (A)	Observation
supplementary information:						
Results Key: IP = Internal protection operated (component indicated) CT = Constant temperatures were obtained TW = Transformer winding opened CD = Components damaged (damaged components indicated) NB = No indication of dielectric breakdown YB = Dielectric breakdown (time and location indicated) NC = Cheesecloth remained intact YC = Cheesecloth charred or flamed NT = Tissue paper remained intact YT = Tissue paper charred or flamed						

C.2	TABLE: transformers						N/A
Loc.	Tested insulation	Working voltage peak /V (2.10.2)	Working voltage rms /V (2.10.2)	Required electric strength (5.2)	Required clearance / mm (2.10.3)	Required creepage distance / mm (2.10.4)	Required distance thr. insul. (2.10.5)
Loc.	Tested insulation			Test voltage / V	Measured clearance / mm	Measured creepage dist./mm	Measured distance thr. insul / mm; number of layers

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

Transformer type number	Enclosure - Miscellaneous ID
supplementary information:	

Enclosure

National Differences

Austria**
Belarus*
Belgium**
Bulgaria**
China*
Czech Republic**
Denmark
Finland
France**
Germany
Greece**
Group
Hungary**
Ireland
Israel
Italy**
Japan*
Korea
Netherlands**
Norway
Poland**
Portugal**
Romania**
Singapore*
Slovakia**
Slovenia**
Spain
Sweden
Switzerland
USA / Canada
Ukraine*
United Kingdom

* No National Differences Declared

** Only Group Differences

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict

Denmark - Differences to IEC 60950-1:2005 (2nd Edition); Am 1:2009			
1.2.4.1	In Denmark, certain types of Class I appliances (see sub-clause 3.2.1.1) may be provided with plug not establishing earthing continuity when inserted into Danish socket-outlets.	Evaluated during separate certification of power supply.	N/A
1.7.5	In Denmark, socket-outlets for providing power to other equipment shall be in accordance with the Heavy Current Regulations, Section 107-2-D1, Standard Sheet DK 1-3a, DK 1-5a or DK 1-7a, when used on Class I equipment. For stationary equipment, the socket-outlet shall be in accordance with Standard Sheet DK 1-1b or DK 1-5a.		N/A
1.7.5	For CLASS II EQUIPMENT the socket outlet shall be in accordance with Standard Sheet DKA 1-4a. (Heavy Current Regulations, Section 107-2-D1)		N/A
3.2.1.1	Supply cord of single-phase equipment having a rated current not exceeding 13 A shall be provided with a plug according to the Heavy Current Regulations, Section 107-2-D1. CLASS I EQUIPMENT provided with socket-outlets with earth contact or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a. If poly-phase equipment and single-phase equipment having a RATED CURRENT exceeding 13 A is provided with a supply cord with a plug, this plug shall be in accordance with the Heavy Current Regulations, Section 107-2-D1 or EN 60309-2.		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict

Finland - Differences to IEC 60950-1:2005 (2nd Edition); Am 1:2009			
1.5.7.1	Resistors bridging BASIC INSULATION in CLASS I PLUGGABLE EQUIPMENT TYPE A must comply with the requirements in 1.5.7.1. In addition when a single resistor is used, the resistor must withstand the resistor test in 1.5.7.2.		N/A
1.5.9.4	The third dashed sentence is applicable only to equipment as defined by annex, 6.1.2.2.		N/A
1.7.2.1	CLASS I PLUGGABLE EQUIPMENT TYPE A intended for connection to other equipment or a network shall, if safety relies on connection to protective earth or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment must be connected to an earthed mains socket-outlet. The marking text shall be: "Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan"		N/A
2.3.2	Requirements according to this annex 6.1.2.1 and 6.1.2.2 apply.		N/A
2.10.5.13	Requirements according to this annex 6.1.2.1 and 6.1.2.2 apply.		N/A
5.1.7.1	Touch current measurement results exceeding 3,5 mA r.m.s are permitted only for the following equipment: - STATIONARY PLUGGABLE EQUIPMENT TYPE A that: (1) is intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, for example, in a telecommunication centre; and (2) has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR; and (3) is provided with instructions for the installation		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	of that conductor by a SERVICE PERSON; - STATIONARY PLUGGABLE EQUIPMENT TYPE B - STATIONARY PERMANENTLY CONNECTED EQUIPMENT		
6.1.2.1	Add the following text between the first and second paragraph of the compliance clause: If this insulation is solid, including insulation forming part of a component, it shall at least consist of either - two layers of thin sheet material, each of which shall pass the electric strength test below, or - one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below. Alternatively for components, there is no distance through insulation requirement for the insulation consisting of an insulating compound completely filling the casing, so that CLEARANCES and CREEPAGE DISTANCES do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition - passes the tests and inspection criteria of 2.10.11 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 2.10.10 shall be performed using 1,5 kV), and - is subject to ROUTINE TESTING for electric strength during manufacturing, using a test voltage of 1,5 kV. It is permitted to bridge this insulation with an optocoupler complying with 2.10.5.4 b). It is permitted to bridge this insulation with a capacitor complying with EN 132400:1994 (EN 60384-14:2005), subclass Y2. A capacitor classified Y3 according to EN 132400 [EN 60384-14:2005], may bridge this insulation under the following conditions: - the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 132400 [EN 60384-14], which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	defined in EN 60950-1:2006, 6.2.2.1; - the additional testing shall be performed on all the test specimens as described in EN 132400 [EN 60384-14]; - the impulse test of 2,5 kV is to be performed before the endurance test in EN 132400 [EN 60384-14], in the sequence of tests as described in EN 132400 [EN 60384-14].		
6.1.2.2	The exclusions are applicable for PERMANENTLY CONNECTED EQUIPMENT, PLUGGABLE EQUIPMENT TYPE B and equipment intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, e.g. in a telecommunication center, and which has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR and is provided with instructions for the installation of that conductor by a SERVICE PERSON.		N/A
7.2	Requirements according to this annex 6.1.2.1 and 6.1.2.2 apply with the term TELECOMMUNICATION NETWORK in 6.1.2 being replaced by the term CABLE DISTRIBUTION SYSTEM.		N/A

Germany - Differences to IEC 60950-1:2005 (2nd Edition); Am 1:2009			
1.7.2.1	According to GPSG, section 2, clause 4: If certain rules on the use, supplementation or maintenance of an item of technical work equipment or ready-to-use commodity must be observed in order to guarantee safety and health, instructions for use in German must be supplied when it is brought into circulation.	Reviewed only English markings/instructions. May be provided in other languages when the equipment will be applied for other national certificated.	N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict

Group - Differences to IEC 60950-1:2005 (2nd Edition); Am 1:2009			
1.1.1	Replace the text of NOTE 3 by the following: NOTE 3 The requirements of EN60065 may also be used to meet safety requirements for multimedia equipment. See IEC Guide 112, Guide on the Safety of Multimedia Equipment. For television sets, EN60065 applies.		N/A
1.2.3	Add the following definition. 1.2.3.Z1 Portable Sound System Small battery powered audio equipment -whose prime purpose is to listen to recorded or broadcasted sound; and -that uses headphones or earphones that can be worn in or on or around the ears; and -that allows the user to walk around NOTE: Examples are mini-disk or CD players, MP3 audio players or similar equipment.		N/A
1.5.1	Add the following NOTE Z1: The use of certain substances in electrical and electronic equipment is restricted within the EU: see Directive 2002/95/EC		N/A
1.7.2.1	Delete NOTE Z1 and add the following paragraph at the end of the subclause: In addition, for a PORTABLE SOUND SYSTEM, the instructions shall include a warning that excessive sound pressure from earphones and headphones can cause hearing loss.		N/A
2.7.1	Replace the subclause as follows: Basic requirements To protect against excessive current, short-circuits and earth faults in PRIMARY CIRCUITS, protective devices shall be included either as integral parts of the equipment or as parts of the building installation, subject to the following, a), b) and c): a) except as detailed in b) and c), protective		N/A

IEC 60950-1:2005									
SubClause	Difference + Test	Result - Remark	Verdict						
	devices necessary to comply with the requirements of 5.3 shall be included as parts of the equipment; b) for components in series with the mains input to the equipment such as the supply cord, appliance coupler, r.f.i. filter and switch, short-circuit and earth fault protection may be provided by protective devices in the building installation; c) it is permitted for PLUGGABLE EQUIPMENT TYPE B or PERMANENTLY CONNECTED EQUIPMENT, to rely on dedicated overcurrent and short-circuit protection in the building installation, provided that the means of protection, e.g. fuses or circuit breakers, is fully specified in the installation instructions. If reliance is placed on protection in the building installation, the installation instructions shall so state, except that for PLUGGABLE EQUIPMENT TYPE A the building installation shall be regarded as providing protection in accordance with the rating of the wall socket outlet.								
2.7.2	Void		N/A						
3.2.3	Delete the NOTE and conduit sizes in parentheses in Table 3A		N/A						
3.2.5.1	Replace: "60245 IEC 53" by "H05 RR-F" "60227 IEC 52" by "H03 VV-F or H03 VVH2-F" "60227 IEC 53" by "H05 VV-F or H05 VVH2-F" In Table 3B, replace the first four lines by the following: <table><tr><td>Up to and including 6</td><td>0.75 a)</td></tr><tr><td>Over 6 up to and including 10</td><td>0.75 b) 1.0</td></tr><tr><td>Over 10 up to and including 16</td><td>1.0 c) 1.5</td></tr></table> In the conditions applicable to table 3B, delete the words "in some countries" in condition a). In Note 1, applicable Table 3B, to delete the second sentence.	Up to and including 6	0.75 a)	Over 6 up to and including 10	0.75 b) 1.0	Over 10 up to and including 16	1.0 c) 1.5		N/A
Up to and including 6	0.75 a)								
Over 6 up to and including 10	0.75 b) 1.0								
Over 10 up to and including 16	1.0 c) 1.5								
3.3.4			N/A						

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	In table 3D, delete the fourth line: conductor sizes for 10 to 13 A, and replace with the following: "Over 10 up to and including 16 1.5 to 2.5 1.5 to by 4" Delete the fifth line: conductor sizes for 13 to 16A.	Evaluated as an element of power supply certification.	
4.3.13.6	Replace the existing NOTE by the following: NOTE Z1 Attention is drawn to 1999/519/EC: Council Recommendation on the limitation of exposure of the general public to electromagnetic fields 0 Hz to 300 GHz and 2006/25/EC: Directive on the minimum health and safety requirements regarding the exposure of workers to risks arising from physical agents (artificial optical radiation). Standards taking into account this Recommendation which demonstrate compliance with the applicable EU Directive are indicated in the OJEC.		N/A
H	Replace the last paragraph of this annex by: At any point 10 cm from the surface of the OPERATOR ACCESS AREA, the dose rate shall not exceed 1 μSv/h (0,1 mR/h) (see NOTE). Account is taken of the background level. Replace the notes as follows: NOTE - These values appear in Directive 96/29/Euratom. Delete NOTE 2.		N/A
Zx	Protection against excessive sound pressure from personal music players		N/A
Zx.1	General - This sub-clause specifies requirements for protection against excessive sound pressure from personal music players that are closely coupled to the ear. It also specifies requirements for earphones and headphones intended for use with personal music players. A personal music player is a portable equipment for personal use, that:		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	- is designed to allow the user to listen to recorded or broadcast sound or video; and - primarily uses headphones or earphones that can be worn in or on or around the ears; and - allows the user to walk around while in use. NOTE 1 Examples are hand-held or body-worn portable CD players, MP3 audio players, mobile phones with MP3 type features, PDA's or similar equipment. A personal music player and earphones or headphones intended to be used with personal music players shall comply with the requirements of this sub-clause. The requirements in this sub-clause are valid for music or video mode only. The requirements do not apply: - while the personal music player is connected to an external amplifier; or - while the headphones or earphones are not used. NOTE 2 An external amplifier is an amplifier which is not part of the personal music player or the listening device, but which is intended to play the music as a standalone music player. The requirements do not apply to: - hearing aid equipment and professional equipment; NOTE 3 Professional equipment is equipment sold through special sales channels. All products sold through normal electronics stores are considered not to be professional equipment. - analogue personal music players (personal music players without any kind of digital processing of the sound signal) that are brought to the market before the end of 2015. NOTE 4 This exemption has been allowed because this technology is falling out of use and it is expected that within a few years it will no longer exist. This exemption will not be extended to other technologies. For equipment which is clearly designed or		

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	intended for use by young children, the limits of EN 71-1 apply.		
Zx.2	Equipment Requirements - No safety provision is required for equipment that complies with the following: - equipment provided as a package (personal music player with its listening device), where the acoustic output LAeq,T is ≤ 85 dBA measured while playing the fixed "programme simulation noise" as described in EN 50332-1; and - a personal music player provided with an analogue electrical output socket for a listening device, where the electrical output is ≤ 27 mV measured as described in EN 50332-2, while playing the fixed "programme simulation noise" as described in EN 50332-1. NOTE 1 Wherever the term acoustic output is used in this clause, the 30 s A-weighted equivalent sound pressure level LAeq,T is meant. See also Zx.5 and Annex Zx. All other equipment shall: a) protect the user from unintentional acoustic outputs exceeding those mentioned above; and b) have a standard acoustic output level not exceeding those mentioned above, and automatically return to an output level not exceeding those mentioned above when the power is switched off; and c) provide a means to actively inform the user of the increased sound pressure when the equipment is operated with an acoustic output exceeding those mentioned above. Any means used shall be acknowledged by the user before activating a mode of operation which allows for an acoustic output exceeding those mentioned above. The acknowledgement does not need to be repeated more than once every 20 h of cumulative listening time; and NOTE 2 Examples of means include visual or audible signals. Action from the user is always required.		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	NOTE 3 The 20 h listening time is the accumulative listening time, independent how often and how long the personal music player has been switched off. d) have a warning as specified in Zx.3; and e) not exceed the following: 1) equipment provided as a package (player with its listening device), the acoustic output shall be ≤ 100 dBA measured while playing the fixed "programme simulation noise" described in EN 50332-1; and 2) a personal music player provided with an analogue electrical output socket for a listening device, the electrical output shall be ≤ 150 mV measured as described in EN 50332-2, while playing the fixed "programme simulation noise" described in EN 50332-1. For music where the average sound pressure (long term LAeq,T) measured over the duration of the song is lower than the average produced by the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song is below the basic limit of 85 dBA. In this case T becomes the duration of the song. NOTE 4 Classical music typically has an average sound pressure (long term LAeq,T) which is much lower than the average programme simulation noise. Therefore, if the player is capable to analyse the song and compare it with the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song is below the basic limit of 85 dBA. For example, if the player is set with the programme simulation noise to 85 dBA, but the average music level of the song is only 65 dBA, there is no need to give a warning or ask an acknowledgement as long as the average sound level of the song is not above the basic limit of 85 dBA.		
Zx.3	Warning - The warning shall be placed on the equipment, or on the packaging, or in the instruction manual and shall consist of the following: - the symbol of Figure 1 (IEC 60417-6044) with a minimum height of 5 mm; and		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	- the following wording, or similar: "To prevent possible hearing damage, do not listen at high volume levels for long periods." Alternatively, the entire warning may be given through the equipment display during use, when the user is asked to acknowledge activation of the higher level		
Zx.4	Requirements for Listening devices (headphones and earphones)		N/A
Zx.4.1	Wired listening devices with analogue input With 94 dBA sound pressure output LAeq,T, the input voltage of the fixed "programme simulation noise" described in EN 50332-2 shall be ≥ 75 mV. This requirement is applicable in any mode where the headphones can operate (active or passive), including any available setting (for example built-in volume level control). NOTE The values of 94 dBA – 75 mV correspond with 85dBA – 27 mV and 100 dBA – 150 mV.		N/A
Zx.4.2	Wired listening devices with digital input With any playing device playing the fixed "programme simulation noise" described in EN 50332-1 (and respecting the digital interface standards, where a digital interface standard exists that specifies the equivalent acoustic level), the acoustic output LAeq,T of the listening device shall be ≤ 100 dBA. This requirement is applicable in any mode where the headphones can operate, including any available setting (for example built-in volume level control, additional sound feature like equalization, etc.). NOTE An example of a wired listening device with digital input is a USB headphone.		N/A
Zx.4.3	Wireless listening devices		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict

	In wireless mode: - with any playing and transmitting device playing the fixed programme simulation noise described in EN 50332-1; and - respecting the wireless transmission standards, where an air interface standard exists that specifies the equivalent acoustic level; and - with volume and sound settings in the listening device (for example built-in volume level control, additional sound feature like equalization, etc.) set to the combination of positions that maximize the measured acoustic output for the abovementioned programme simulation noise, the acoustic output LAeq,T of the listening device shall be ≤ 100 dBA. NOTE An example of a wireless listening device is a Bluetooth headphone.		
Zx.5	Measurement Methods Measurements shall be made in accordance with EN 50332-1 or EN 50332-2 as applicable. Unless stated otherwise, the time interval T shall be 30 s. NOTE Test method for wireless equipment provided without listening device should be defined.		N/A

Ireland - Differences to IEC 60950-1:2005 (2nd Edition); Am 1:2009			
4.3.6	DIRECT PLUG-IN EQUIPMENT is known as plug similar devices. Such devices shall comply with Statutory Instrument 526:1997 - National Standards Authority of Ireland (Section 28) (Electrical plugs, plug similar devices and sockets for domestic use) Regulations, 1997.		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict

Israel - Differences to IEC 60950-1:2005 (2nd Edition); Am 1:2009			
1.6.1	Add Note: This clause is applicable subject to the Electricity Law, 1954, its regulations and revisions.		N/A
1.7	Add: Sub-clause 1.7.201 shall be added at the beginning of the clause.		N/A
1.7.2.1	Add: All the instructions and warnings related to safety shall also be written in the Hebrew language.		N/A
1.7.201	The marking in the Hebrew language shall be in accordance with the Consumer Protection Order (Marking of goods), 1983. In addition, the marking required by clause 1.7.1, the following details shall be marked in the Hebrew language. The details shall be marked on the apparatus or on its package, or on a label properly attached to the apparatus or on the package, by bonding or sewing, in a manner that the label cannot be easily removed. 1) name of the apparatus and its commercial designation; 2) Manufacturer's name and address. If the apparatus is imported, the importer's name and address; 3) Manufacturer's registered trademark, if any; 4) Name of the model and serial number, if any; 5) country of manufacturer		N/A
2.9.4	Add: Seven means of protection against electrocution are permitted according to the Electricity Law, 1954, and the Electricity Regulations (Earthing and means of protection against electricity of voltages up to 1,000V) 1991. The seven are 1) TN-S or TN-C-S 2) TT 3) IT		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict

	4) Isolated Transformer 5) Safety extra low voltage (SELV or ELV) 6) Residual current circuit breaker (30 ma = 1delta) 7) reinforced insulation; double insulation (Class II)		
2.201	Add: Prior to carrying out the tests in accordance with the clauses of this Standard, the compliance of the apparatus with the relevant requirements specified in the appropriate part of the standard series SI 961, shall be checked. The apparatus shall meet the requirements in the appropriate part of the standard series SI 961. If there are components of the apparatus for the prevention of electromagnetic interference, these components shall not reduce the safety level of the apparatus as required by this standard.		N/A
3.2.1.1	Add after the note: The feed plug shall comply with the requirements of Israel Standard SI 32 Part 1.1.		N/A
3.2.1.2	Add: At the end of the first paragraph add the following note: At the time of issue of the standard, there is no Israel Standard for connection accessories to d.c.		N/A

Korea - Differences to IEC 60950-1:2005 (2nd Edition); Am 1:2009			
1.5.101	Plugs for the connection of the apparatus to the mains supply shall comply with the Korean requirement (KSC 8305)		N/A
8	EMC - The apparatus shall comply with the relevant CISPR standards		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict

Norway - Differences to IEC 60950-1:2005 (2nd Edition); Am 1:2009			
1.2.13.14	Requirements according to this annex 1.7.2.1 and 7.3 apply.		N/A
1.5.7.1	Resistors bridging BASIC INSULATION in CLASS I PLUGGABLE EQUIPMENT TYPE A must comply with the requirements in 1.5.7.2. In addition when a single resistor is used, the resistor must withstand the resistor test in 1.5.7.2.		N/A
1.5.8	Due to the IT power system used (see annex V, figure V.7), capacitors are required to be rated for the applicable line-to-line voltage (230 V).	It should be evaluated during separate certification of power supply.	N/A
1.5.9.4	The third dashed sentence is applicable only to equipment as defined in 6.1.2.2 of this annex.		N/A
1.7.2.1	CLASS I PLUGGABLE EQUIPMENT TYPE A intended for connection to other equipment or a network shall, if safety relies on connection to protective earth or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment must be connected to an earthed mains socket-outlet. The marking text shall be: "Apparatet må tilkoples jordet stikkontakt"		N/A
1.7.2.1	In Norway, the screen of the cable distribution system is normally not earthed at the entrance of the building and there is normally no equipotential bonding system within the building. Therefore the protective earthing of the building installation need to be isolated from the screen of a cable distribution system. It is however accepted to provide the insulation external to the equipment by an adapter or an interconnection cable with galvanic isolator, which may be provided by e.g. a retailer.		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	The user manual shall then have the following or similar information in Norwegian and Swedish language respectively, depending on in what country the equipment is intended to be used in: "Equipment connected to the protective earthing of the building installation through the mains connection or through other equipment with a connection to protective earthing - and to a cable distribution system using coaxial cable, may in some circumstances create a fire hazard. Connection to a cable distribution system has therefore to be provided through a device providing electrical isolation below a certain frequency range (galvanic isolator, see EN 60728-11)." NOTE: In Norway, due to regulation for installations of cable distribution systems, and in Sweden, a galvanic isolator shall provide electrical insulation below 5 MHz. The insulation shall withstand a dielectric strength of 1,5 kV r.m.s., 50 Hz or 60 Hz, for 1 min. Translation to Norwegian (the Swedish text will also be accepted in Norway): "Utstyr som er koplet til beskyttelsesjord via nettplugg og/eller via annet jordtilkoplet utstyr - og er tilkoplet et kabel-TV nett, kan forårsake brannfare. For å unngå dette skal det ved tilkopling av utstyret til kabel-TV nettet installeres en galvanisk isolator mellom utstyret og kabel-TV nettet."		
2.2.4	Requirements according to this annex, 1.7.2.1, 6.1.2.1 and 6.1.2.2 apply.		N/A
2.3.2	Requirements according to this annex, 6.1.2.1 and 6.1.2.2 apply.		N/A
2.3.4	Requirements according to this annex, 1.7.2.1, 6.1.2.1 and 6.1.2.2 apply.		N/A
2.10.5.13	Requirements according to this annex, 6.1.2.1 and 6.1.2.2 apply.		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
5.1.7.1	TOUCH CURRENT measurement results exceeding 3,5 mA r.m.s are permitted only for the following equipment: - STATIONARY PLUGGABLE EQUIPMENT TYPE A that: (1) is intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, for example, in a telecommunication centre; and (2) has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR; and (3) is provided with instructions for the installation of that conductor by a SERVICE PERSON; - STATIONARY PLUGGABLE EQUIPMENT TYPE B - STATIONARY PERMANENTLY CONNECTED EQUIPMENT		N/A
6.1.2.1	Add the following text between the first and second paragraph of the compliance clause: If this insulation is solid, including insulation forming part of a component, it shall at least consist of either - two layers of thin sheet material, each of which shall pass the electric strength test below, or - one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below. Alternatively for components, there is no distance through insulation requirement for the insulation consisting of an insulating compound completely filling the casing, so that CLEARANCES and CREEPAGE DISTANCES do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition - passes the tests and inspection criteria of 2.10.11 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 2.10.10 shall be performed using 1,5 kV), and - is subject to ROUTINE TESTING for electric strength during manufacturing, using a test voltage of 1,5 kV.		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	It is permitted to bridge this insulation with an optocoupler complying with 2.10.5.4 b). It is permitted to bridge this insulation with a capacitor complying with EN 132400:1994, subclass Y2. A capacitor classified Y3 according to EN 123400 [EN 60384-14:2005], may bridge this insulation under the following conditions: - the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 132400 [EN 60384-14], which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in EN 60950-1:2006, 6.2.2.1; - the additional testing shall be performed on all the test specimens as described in EN 132400 [EN 60384-14]; - the impulse test of 2,5 kV is to be performed before the endurance test in EN 132400 [EN 60384-14], in the sequence of tests as described in EN 132400 [EN 60384-14].		
6.1.2.2	The exclusions are applicable for PERMANENTLY CONNECTED EQUIPMENT and PLUGGABLE EQUIPMENT TYPE B and equipment intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, e.g. in a telecommunication centre, and which has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR and is provided with instructions for the installation of that conductor by a SERVICE PERSON.		N/A
7.2	Requirements according to this annex, 6.1.2.1 and 6.1.2.2 apply with the term TELECOMMUNICATION NETWORK in 6.1.2 being replaced by the term CABLE DISTRIBUTION SYSTEM.		N/A
7.3	Refer to EN 60728-11:2005 for installation conditions		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict

7.3	Requirements according to this annex 1.2.13.14 and 1.7.2.1 apply.		N/A
-----	---	--	-----

Spain - Differences to IEC 60950-1:2005 (2nd Edition); Am 1:2009			
3.2.1.1	Supply cords of single-phase equipment having a rated current not exceeding 10A shall be provided with a plug according to UNE 20315:1994. Supply cords of single-phase equipment having a rated current not exceeding 2.5A shall be provided with a plug according to UNE-EN 50075:1993. CLASS 1 EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules, shall be provided with a plug in accordance with standard UNE 20315:1994. If poly-phase equipment is provided with a supply cord with a plug, this plug shall be in accordance with UNE-EN 60309-2.		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict

Sweden - Differences to IEC 60950-1:2005 (2nd Edition); Am 1:2009			
1.2.13.14	Requirements according to this annex 1.7.2.1 and 7.3 apply.		N/A
1.5.7.1	Resistors bridging BASIC INSULATION in CLASS I PLUGGABLE EQUIPMENT TYPE A must comply with the requirements in 1.5.7.2. In addition when a single resistor is used, the resistor must withstand the resistor test in 1.5.7.2.		N/A
1.5.9.4	The third dashed sentence is applicable only to equipment as defined by this annex, 6.1.2.2		N/A
1.7.2.1	CLASS I PLUGGABLE EQUIPMENT TYPE A intended for connection to other equipment or a network shall, if safety relies on connection to protective earth or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment must be connected to an earthed mains socket-outlet. The marking text shall be: "Apparaten skall anslutas till jordat uttag"		N/A
1.7.2.1	In Sweden, the screen of the cable distribution system is normally not earthed at the entrance of the building and there is normally no equipotential bonding system within the building. Therefore the protective earthing of the building installation need to be isolated from the screen of a cable distribution system. It is however accepted to provide the insulation external to the equipment by an adapter or an interconnection cable with galvanic isolator, which may be provided by e.g. a retailer. The user manual shall then have the following or similar information in Norwegian and Swedish language respectively, depending on in what country the equipment is intended to be used in: "Equipment connected to the protective earthing of the building installation through the mains		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	connection or through other equipment with a connection to protective earthing - and to a cable distribution system using coaxial cable, may in some circumstances create a fire hazard. Connection to a cable distribution system has therefore to be provided through a device providing electrical isolation below a certain frequency range (galvanic isolator, see EN 60728-11)." NOTE: In Norway, due to regulation for installations of cable distribution systems, and in Sweden, a galvanic isolator shall provide electrical insulation below 5 MHz. The insulation shall withstand a dielectric strength of 1,5 kV r.m.s., 50 Hz or 60 Hz, for 1 min. Translation to Swedish: "Utrustning som är kopplad till skyddsjord via jordat vägguttag och/eller via annan utrustning och samtidigt är kopplad till kabel-TV nät kan i vissa fall medföra risk för brand. För att undvika detta skall vid anslutning av utrustningen till kabel-TV nät galvanisk isolator finnas mellan utrustningen och kabel-TV nätet."		
2.3.2	Requirements according to this annex, 6.1.2.1 and 6.1.2.2 apply.		N/A
2.10.5.13	Requirements according to this annex, 6.1.2.1 and 6.1.2.2 apply.		N/A
5.1.7.1	TOUCH CURRENT measurement results exceeding 3,5 mA r.m.s are permitted only for the following equipment: STATIONARY PLUGGABLE EQUIPMENT TYPE A that: (1) is intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, for example, in a telecommunication centre; and (2) has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR; and (3) is provided with instructions for the installation of that conductor by a SERVICE PERSON; - STATIONARY PLUGGABLE TYPE B - STATIONARY PERMANENTLY CONNECTED EQUIPMENT		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict

6.1.2.1	Add the following text between the first and second paragraph of the compliance clause: If this insulation is solid, including insulation forming part of a component, it shall at least consist of either - two layers of thin sheet material, each of which shall pass the electric strength test below, or - one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below. Alternatively for components, there is no distance through insulation requirement for the insulation consisting of an insulating compound completely filling the casing, so that CLEARANCES and CREEPAGE DISTANCES do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition - passes the tests and inspection criteria of 2.10.11 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 2.10.10 shall be performed using 1,5 kV), and - is subject to ROUTINE TESTING for electric strength during manufacturing, using a test voltage of 1,5 kV. It is permitted to bridge this insulation with an optocoupler complying with 2.10.5.4 b). It is permitted to bridge this insulation with a capacitor complying with EN 132400:1994, subclass Y2. A capacitor classified Y3 according to EN 132400 [EN 60384-14:2005], may bridge this insulation under the following conditions: - the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 132400 [EN 60384-14], which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in EN 60950-1:2006, 6.2.2.1; - the additional testing shall be performed on all the test specimens as described in EN 132400 [EN 60384-14]; - the impulse test of 2,5 kV is to be performed		N/A
---------	---	--	-----

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	before the endurance test in EN 132400 [EN 60384-14], in the sequence of tests as described in EN 132400 [EN 60384-14.]		
6.1.2.2	The exclusions are applicable for PERMANENTLY CONNECTED EQUIPMENT and PLUGGABLE EQUIPMENT TYPE B and equipment intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, e.g. in a telecommunication centre, and which has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR and is provided with instructions for the installation of that conductor by a SERVICE PERSON.		N/A
7.2	Requirements according to this annex, 6.1.2.1 and 6.1.2.2 apply with the term TELECOMMUNICATION NETWORK in 6.1.2 being replaced by the term CABLE DISTRIBUTION SYSTEM.		N/A
7.3	Requirements according to this annex 1.2.13.14 and 1.7.2.1 apply.		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict

Switzerland - Differences to IEC 60950-1:2005 (2nd Edition); Am 1:2009			
3.2.1.1	Supply cords of equipment having a RATED CURRENT not exceeding 10A shall be provided with a plug complying with SEV 1011 or IEC 60884-1 and one of the following dimension sheets: SEV 6532-2 1991 Plug Type 15 3P+N+PE SEV 6533-2 1991 Plug Type 11 L+N SEV 6534-2 1991 Plug Type 12 L+N+PE In general, EN 60309 applies for plugs for currents exceeding 10A. However, a 16A plug and socket-outlet system is being introduced in Switzerland, the plugs of which are according to the following dimension sheets, published in February, 1998. SEV 5932-2 1998:Plug Type 25 3L+N+PE SEV 5933-2 1998:Plug Type 21 L+N SEV 5934-2 1998:Plug Type 23 L+N+PE		N/A
3.2.4	Requirements according to this annex 3.2.1.1 apply.		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict

USA / Canada - Differences to IEC 60950-1:2005 (2nd Edition); Am 1:2009			
1.1	Equipment able to be installed in accordance with the National Electrical Code ANSI/NFPA 70 and the Canadian Electrical Code, Part1, and when applicable, the National Electrical Safety Code, IEEE C2.		Pass
1.1.1	Equipment able to be installed in accordance with ANSI/NFPA 75 and NEC Art. 645 unless intended for use outside of computer room and provided with such instructions.		Pass
1.1.2	Equipment in wire-line communication facilities serving high-voltage electric power stations operating at greater than 1kV are excluded.		N/A
1.1.2	Special requirements apply to equipment intended for use outdoors.		N/A
1.4.14	For PLUGGABLE EQUIPMENT TYPE A, the protection in the installation is assumed to be 20 A.		Pass
1.5.1	All IEC standards for components identified in Annex P.1 replaced by the relevant requirements of CSA and UL component standards in Annex P.1.		Pass
1.5.1	All IEC standards for components identified in Annex P.2 alternatively satisfied by the relevant requirements of CSA and UL component standards in Annex P.2.		Pass
1.5.5	Interconnecting cables acceptable for the application regarding voltage, current, temperature, flammability, mechanical serviceability and the like.		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict

1.5.5	For other than limited power and TNV circuits, the type of output circuit identified for output connector.		N/A
1.5.5	External cable assemblies that exceed 3.05 m in length to be types specified in the NEC and CEC.		N/A
1.5.5	Detachable external interconnecting cables 3.05 m or less in length and provided with equipment marked to identify the responsible organization and the designation for the cable.		N/A
1.5.5	Building wiring and cable for use in ducts, plenums and other air handling space subject to special requirements and excluded from scope.		N/A
1.5.5	Telephone line and extension cords and the like comply with UL 1863 and CSA C22.2 No. 233.		N/A
1.6.1.2	Equipment intended for connection to a d.c. power (mains) distribution system is subject to special circuit classification requirements (e.g., TNV-2)		N/A
1.6.1.2	Earthing of d.c. powered equipment provided.		N/A
1.7	Lamp replacement information indicated on lampholder in operator access area.		N/A
1.7.1	Special marking format for equipment intended for use on a supply system with an earthed neutral and more than one phase		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	conductor.		
1.7.1	Equipment voltage rating not higher than rating of the plug except under special conditions.		N/A
1.7.6	Special fuse replacement marking for operator accessible fuses.		N/A
1.7.7	Identification of terminal connection of the equipment earthing conductor.		N/A
1.7.7	Connectors and field wiring terminals for external Class 2 or Class 3 circuits provided with marking indicating minimum Class of wiring to be used.		N/A
1.7.7	Marking located adjacent to terminals and visible during wiring.		N/A
2.1.1.1	Bare TNV conductive parts in the interior of equipment normally protected against contact by a cover intended for occasional removal are exempt provided instructions include directions for disconnection of TNV prior to removal of the cover.		N/A
2.3.1.b	Other telecommunication signaling systems (e.g., message waiting) than described in 2.3.1(b) are subject to M.4.		N/A
2.3.1.b	For TNV-2 and TNV-3 circuits with other than ringing signals and with voltages exceeding 42.4 Vp or 60 V d.c., the maximum current limit through a 2000 Ohm or greater resistor with loads disconnected is 7.1 mA peak or 30 mA d.c. under normal conditions.		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
2.3.1.b	Limits for measurements across 5000 ohm resistor in the event of a single fault are replaced after 200 ms with the limits of M.3.1.4.		N/A
2.3.2.1	In the event of a single fault, the limits of 2.2.3 apply to SELV circuits and accessible conductive parts.		N/A
2.3.2.4	Enamel coating on signal transformer winding wire allowed as an alternative to Basic insulation in specific telecommunication applications when subjected to special construction requirements and routine testing.		N/A
2.5	Overcurrent protection device required for Class 2 and Class 3 limiting in accordance with the NEC, or for a Limited Power Source, not interchangeable with devices of higher ratings if operator replaceable.		N/A
2.6	Equipment having receptacles for output a.c. power connectors generated from an internal separately derived source have the earthed (grounded) circuit conductor suitably bonded to earth.		N/A
2.6.3.3	For PLUGGABLE EQUIPMENT TYPE A, if a) b) or c) are not applicable, the current rating of the circuit is taken as 20 A		N/A
2.6.3.3	The first column on Table 2D requirement: "Smaller of the RATED CURRENT of the equipment or the PROTECTIVE CURRENT RATING of the circuit under consideration."		N/A
2.6.3.4	Capacity of connection between earthing terminal and parts required to be earthed subject to		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	special conditions based on the current rating of the circuit.		
2.6.3.4	Protective bonding conductors and their terminals of non-standard constructions (e.g. PWB traces) evaluated to limited short-circuit test of CSA C22.2 No.0.4.		N/A
2.6.4.1	Field wiring terminals for earthing conductors suitable for wire sizes (gauge) used in US and Canada.		N/A
2.7.1	Data for selection of special external branch circuit overcurrent devices marked on the equipment.		N/A
2.7.1	Standard supply outlets protected by overcurrent device in accordance with the NEC, and CEC, Part 1.		N/A
2.7.1	Overcurrent protection for individual transformers that distribute power to other units over branch circuit wiring.		N/A
2.7.1	Additional requirements for overcurrent protection apply to equipment provided with panelboards.		N/A
2.7.1	Non-motor-operated equipment requiring special overcurrent protective device marked with device rating.		N/A
2.10.5.12	Multi-layer winding wire subject to UL component wire requirements in addition to 2.10.5.12 and Annex U.		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
3.1.1	Permissible combinations of internal wiring/external cable sizes for overcurrent and short circuit protection.		N/A
3.1.1	All interconnecting cables protected against overcurrent and short circuit.		N/A
3.2	Wiring methods permit connection of equipment to primary power supply in accordance with the NEC and CEC, Part 1.		N/A
3.2.1	Permitted use for flexible cords and plugs.		N/A
3.2.1	Flexible cords provided with attachment plug rated 125% of equipment current rating.		N/A
3.2.1	Any Class II equipment provided with 15 or 20 A standard supply outlets, Edison-base lampholders or single pole disconnect device provided with a polarized type attachment plug.		N/A
3.2.1.2	Equipment intended for connection to DC mains supply power systems complies with special wiring requirements (e.g., no permanent connection to supply by flexible cord).		N/A
3.2.1.2	Equipment with one pole of the DC mains supply connected to both the equipment mains input terminal and the main protective earthing terminal provided with special instructions and construction provisions for earthing.		N/A
3.2.1.2	Equipment with means for connecting supply to earthing electrode conductor has no switches or protective devices between supply		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	connection and earthing electrode connection.		
3.2.1.2	Special markings and instructions for equipment with provisions to connect earthed conductor of a DC supply circuit to earthing conductor at the equipment.		N/A
3.2.1.2	Special markings and instructions for equipment with earthed conductor of a DC supply circuit connected to the earthing conductor at the equipment.		N/A
3.2.1.2	Terminals and leads provided for permanent connection of DC powered equipment to supply marked to indicate polarity if reverse polarity may result in a hazard.		N/A
3.2.3	Permanently connected equipment has provision for connecting and securing a field wiring system (i.e. conduit, or leads etc.) per the NEC and CEC, Part 1.		N/A
3.2.3	Permanently connected equipment may have terminals or leads not smaller than No. 18 AWG (0.82 mm ²) and not less than 150 mm in length for connection of field installed wiring.		N/A
3.2.3	If supply wires exceed 60 °C, marking indicates use of 75 °C or 90 °C wiring for supply connection as appropriate.		N/A
3.2.3	Equipment compatible with suitable trade sizes of conduits and cables.		N/A
3.2.5	Power supply cords are required to be no longer than 4.5 m in length.		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	Minimum cord length is required to be 1.5 m, with certain constructions such as external power supplies allowed to consider both input and output cord lengths into the requirement. Flexible power supply cords are required to be compatible with Article 400 of the NEC, and Tables 11 and 12 of the CEC.		
3.2.5	Conductors in power supply cords sized according to NEC and CEC, Part I.		N/A
3.2.5	Power supply cords and cord sets incorporate flexible cords suitable for the particular application.		N/A
3.2.6	Strain relief provided for non-detachable interconnecting cables not supplied by a limited power source.		N/A
3.2.9	Adequate wire bending space and volume of field wiring compartment required to properly make the field connections.		N/A
3.2.9	Equipment intended solely for installation in Restricted Access Locations using low voltage d.c. systems may not need provision for connecting and securing a field wiring system. A method of securing wiring or instructions provided to ensure the wiring is protected from abuse.		N/A
3.3	Field wiring terminals provided for interconnection of units for other than LPS or Class 2 circuits also comply with 3.3.		N/A
3.3	Interconnection of units by LPS or Class 2 conductors may have field wiring connectors other		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	than those specified in 3.3 if wiring is reliably separated.		
3.3.1	Terminals for the connection of neutral conductor identified by a distinctive white marking or other equally effective means.		N/A
3.3.3	Wire binding screw terminal permitted for connection of No. 10 AWG (5.3 mm ²) or smaller conductor if provided with upturned lugs, cupped washer or equivalent retention.		N/A
3.3.4	Terminals accept wire sizes (gauge) used in the U.S. and Canada.		N/A
3.3.4	Terminals accept current-carrying conductors rated 125% of the equipment current rating.		N/A
3.3.5	First column of Table 3E requirement: "Smaller of the RATED CURRENT of the equipment or the PROTECTIVE CURRENT RATING of the circuit under consideration."		N/A
3.3.6	Field wiring terminals marked to indicate the material(s) of the conductor appropriate for the terminals used.		N/A
3.3.6	Connection of an aluminum conductor not permitted to terminal for equipment earthing conductor.		N/A
3.3.6	Field wiring connections made through the use of suitable pressure connectors (including set screw type), solder lugs or splices to flexible leads.		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
3.4.2	Separate motor control device(s) required for cord-connected equipment rated more than 12 A, or with motor rated more than 1/3 hp or more than 120 V.		N/A
3.4.8	Vertically mounted disconnect devices oriented so up position of handle is "on".		N/A
3.4.11	For computer-room applications, equipment with battery systems capable of supplying 750 VA for 5 min require battery disconnect means.		N/A
4.2.8.1	Special opening restrictions for enclosures around CRTs with face dimension of 160 mm or more.		N/A
4.2.9	Compartment housing high-pressure lamp marked to indicate risk of explosion.		N/A
4.2.11	For equipment intended for mounting on racks and provided with slide/rails allowing the equipment to slide away from the rack for installation, service and maintenance, additional construction, performance and marking requirements are applicable to determine the adequacy of the slide/rails.		N/A
4.3.2	Loading test for equipment with handle(s) used to support more than 9 kg tested at four times the weight of the unit.		N/A
4.3.6	In addition to the IEC requirements, Direct Plug-in Equipment complies with UL 1310 or CSA 223 mechanical assembly requirements.		N/A
4.3.12			N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	The maximum quantity of flammable liquid stored in equipment complies with ANSI/NFPA 30(Table NAE.6).		
4.3.12	Equipment using replenishable liquids marked to indicate type of liquid to be used.		N/A
4.3.13.2	Equipment that produces x-radiation and does not comply with 4.3.12 under all conditions of servicing marked to indicate the presence of radiation where readily visible.		N/A
4.3.13.5	Requirements contained in the applicable national codes and regulations apply to lasers (21 CFR 1040 and REDR C1370).		N/A
4.7	Automated information storage equipment intended to contain more than 0.76 m ³ of combustible media requires provision for automatic sprinklers or a gaseous agent extinguishing system.		N/A
4.7.3.1	Equipment for use in environmental air space other than ducts or plenums provided with metal enclosure or with non-metallic enclosure having adequate fire-resistance and low smoke producing characteristics. Low smoke-producing characteristics evaluated according to UL 2043. Equipment for installation in space used for environmental air as described in Sec. 300-22(c) of the NEC provided with instructions indicating suitability for installation in such locations.		N/A
4.7.3.1	Flame spread rating for external surface of combustible material with exposed area greater than 0.93 m ² or a single dimension greater than 1.8 m; 50 or less for computer room applications or 200 or less for other applications.		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
4.7.3.4	Wire marked "VW-1" or "FT-1" considered equivalent.		Pass
5.1.8.2	Special earthing provisions and instructions for equipment with high touch current due to telecommunication network connections.		N/A
5.1.8.3	Touch current due to ringing voltage for equipment containing telecommunication network leads.		N/A
5.3.7	Overloading of SELV connectors and printed wiring board receptacles accessible to the operator.		N/A
5.3.7	Tests interrupted by opening of a component repeated two additional times.		N/A
5.3.9.1	Test interrupted by opening of wire or trace subject to certain conditions.		N/A
6	Specialized instructions provided for telephones that may be connected to a telecommunications network.		N/A
6	Marking identifying function of telecommunication type connectors not used for connection to a telecommunication network.		N/A
6.3	Equipment remotely powered over telecommunication wiring systems provided with specialized markings adjacent to the connection.		N/A
6.3	Overcurrent protection incorporated into		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	equipment to provide power over telecommunication wiring system not interchangeable with devices of higher ratings if operator replaceable.		
6.4	Additional requirements for equipment intended for connection to a telecommunication network using cable subject to overvoltage from power line failures (Fig. 6C).		N/A
6.4	Where 26 AWG line cord required by Fig. 6C, either the cord is provided with the equipment or described in the safety instructions.		N/A
7	Equipment associated with the cable distribution system may need to be subjected to applicable parts of Chapter 8 of the NEC.		N/A
H	Ionizing radiation measurements made under single fault conditions in accordance with the requirements of the Code of Federal Regulations 21 CFR 1020 and the Canadian Radiation Emitting Devices Act, REDR C1370.		N/A
M.2	Continuous ringing signals evaluated to Method A subjected to special accessibility considerations.		N/A
M.4	Special requirements for message waiting and similar telecommunications signals.		N/A
NAC	Equipment intended for use with a generic secondary protector marked with suitable instructions.		N/A
NAC	Equipment intended for use with a specific		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	primary or secondary protector marked with suitable instructions.		
NAD	Acoustic pressure from an ear piece less than 140 dBA for short duration disturbances, and less than 125 dBA for handsets, 118 dBA for headsets and insert earphones, for long duration disturbances.		N/A
NAD	Equipment connected to a telecommunication and cable distribution networks and supplied with an earphone intended to be held against, or in the ear is required to comply with special acoustic pressure requirements.		N/A
EE.5	UL articulated accessibility probe (Fig. EE.3) required for assessing accessibility to document/media shredders, instead of Figure 2A test finger.		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict

United Kingdom - Differences to IEC 60950-1:2005 (2nd Edition); Am 1:2009			
2.6.3.3	The current rating of the circuit shall be taken as 13 A, not 16 A.		N/A
2.7.1	To protect against excessive currents and short-circuits in the PRIMARY CIRCUIT of DIRECT PLUG-IN EQUIPMENT, tests according to 5.3 shall be conducted, using an external protective device rated 30 A or 32 A. If these tests fail, suitable protective devices shall be included as integral parts of the DIRECT PLUG-IN EQUIPMENT, so that the requirements of 5.3 are met.		N/A
3.2.1.1	Apparatus which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to BS 1363 by means of that flexible cable or cord and plug, shall be fitted with a "standard plug" in accordance with Statutory Instrument 1786: 1994 - The Plugs and Sockets etc. (Safety) Regulations 1994, unless exempted by those regulations. NOTE: "Standard plug" is defined in SI 1786: 1994 and essentially means an approved plug conforming to BS 1363 or an approved conversion plug.		N/A
3.2.5.1	A power supply cord with conductor of 1.25 mm ² is allowed for equipment with a rated current over 10A and up to and including 13A.		N/A
3.3.4	The range of conductor sizes of flexible cords to be accepted by terminals for equipment with a rated current of over 10 A up to and including 13 A is 1.25 mm ² to 1.5 mm ² nominal cross-sectional area.	Evaluated as an element of power supply certification.	N/A
4.3.6	The torque test is performed using a socket		N/A

IEC 60950-1:2005			
SubClause	Difference + Test	Result - Remark	Verdict
	outlet complying with BS 1363 part 1:1995, including Amendment 1:1997 and Amendment 2:2003 and the plug part of DIRECT PLUG-IN EQUIPMENT shall be assessed to BS 1363: Part 1, 12.1, 12.2, 12.3, 12.9, 12.11, 12.12, 12.13, 12.16 and 12.17, except that the test of 12.17 is performed at not less than 125 °C. Where the metal earth pin is replaced by an Insulated Shutter Opening Device (ISOD), the requirements of clauses 22.2 and 23 also apply.		

Enclosures

Enclosures

<u>Type</u>	<u>Supplement Id</u>	<u>Description</u>
Photographs	3-01	Front view
Photographs	3-02	Rear view - 1 of 2
Photographs	3-03	Rear view - 2 of 2
Photographs	3-04	LED Drive board - 1 (P/N: G170EG%% (% may be 0-9, A-Z or blank))
Photographs	3-11	LED Drive board - 2 (P/N: G170ETN%%%%%%%% (where % may be 0-9, A-Z or blank))
Photographs	3-12	Rear view - alternate
Diagrams		
Schematics + PWB	5-02	PWB layout of LED Driver board (P/N: G170EG%% (% may be 0-9, A-Z or blank))
Schematics + PWB	5-03	PWB layout of LED Driver board (P/N: G170ETN%%%%%%%% (% may be 0-9, A-Z or blank))
Manuals		
Miscellaneous	7-03	Factory declaration letter.
Miscellaneous	7-04	Equipment List
Licenses		
Marking Plate	13-01	Marking label - 1
Marking Plate	13-02	Marking label - 2


Enclosures

MarkingPlate ID 13-01




Enclosures


MarkingPlate ID 13-02

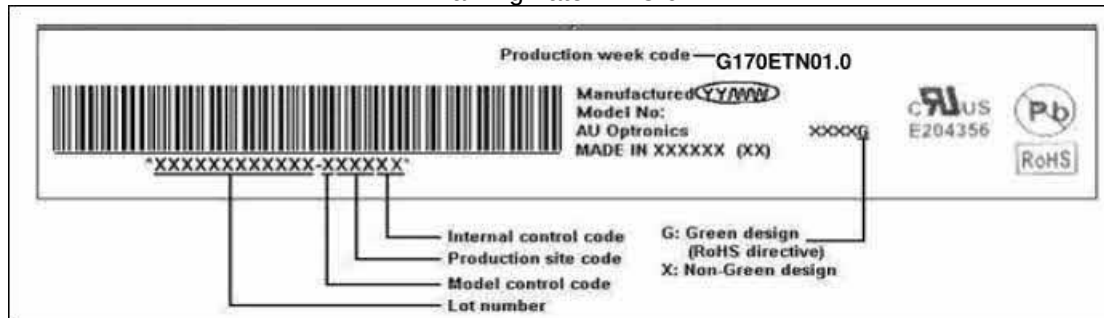


Photographs ID 3-01

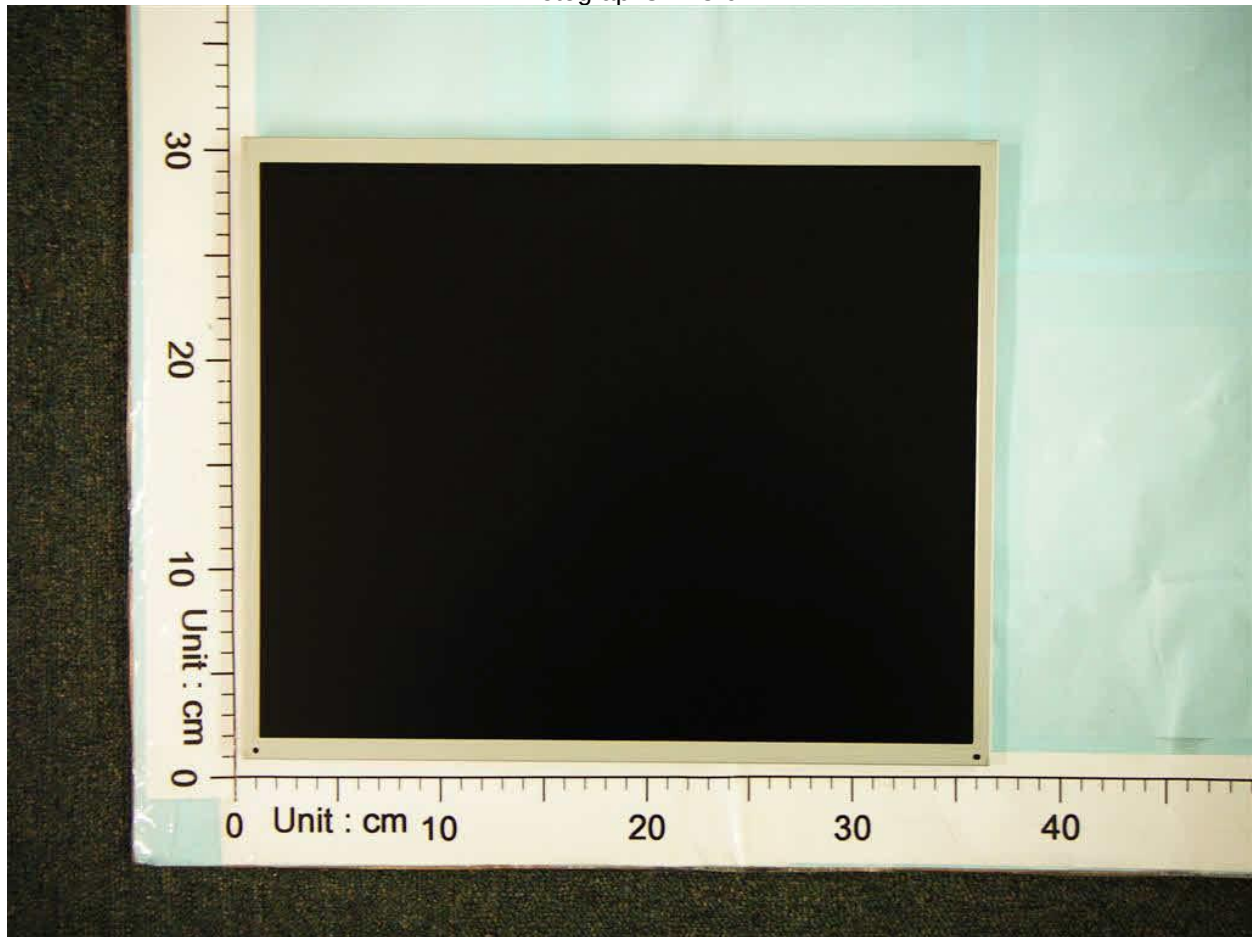


Photographs ID 3-02

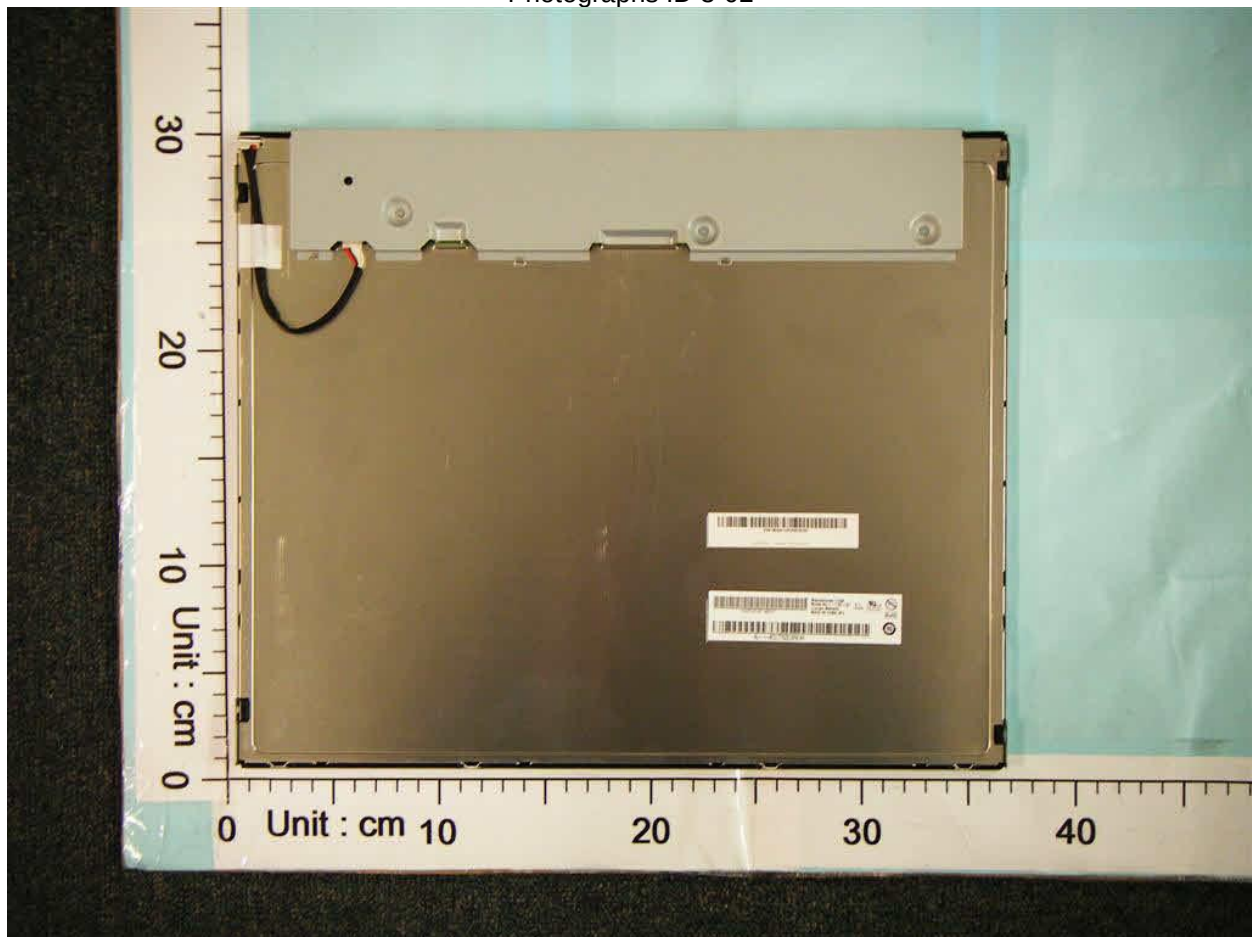


Photographs ID 3-03

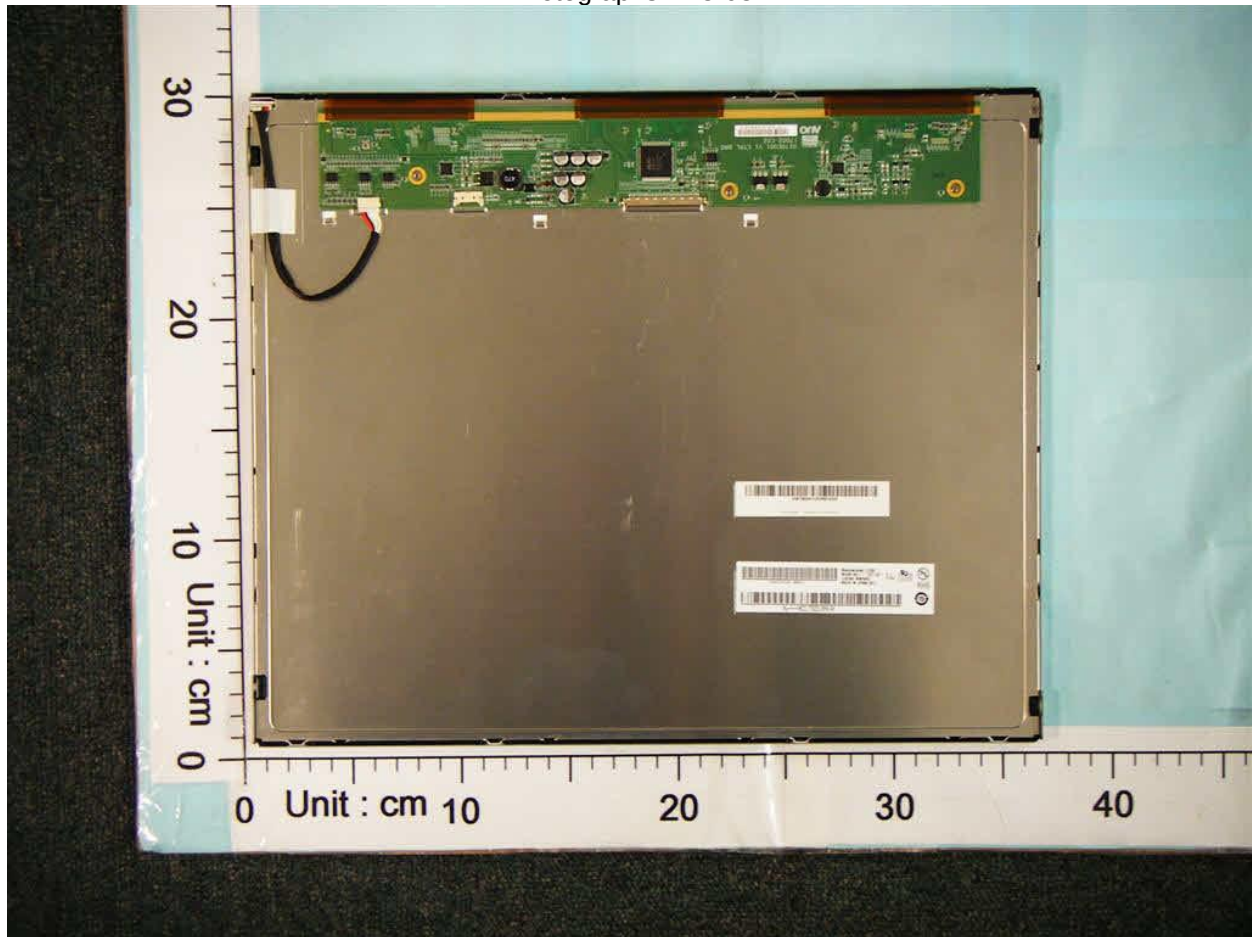

Photographs ID 3-04

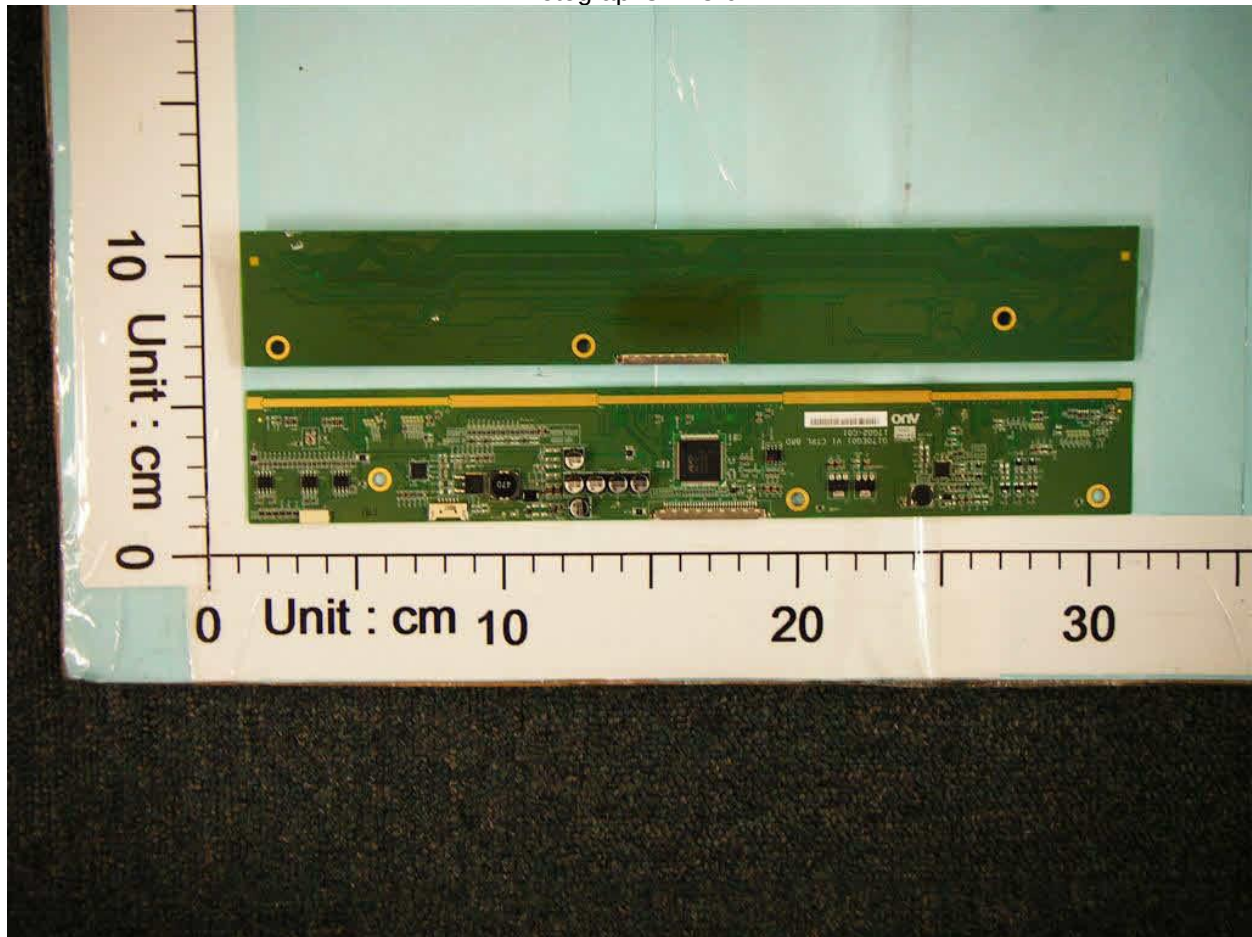


Photographs ID 3-11

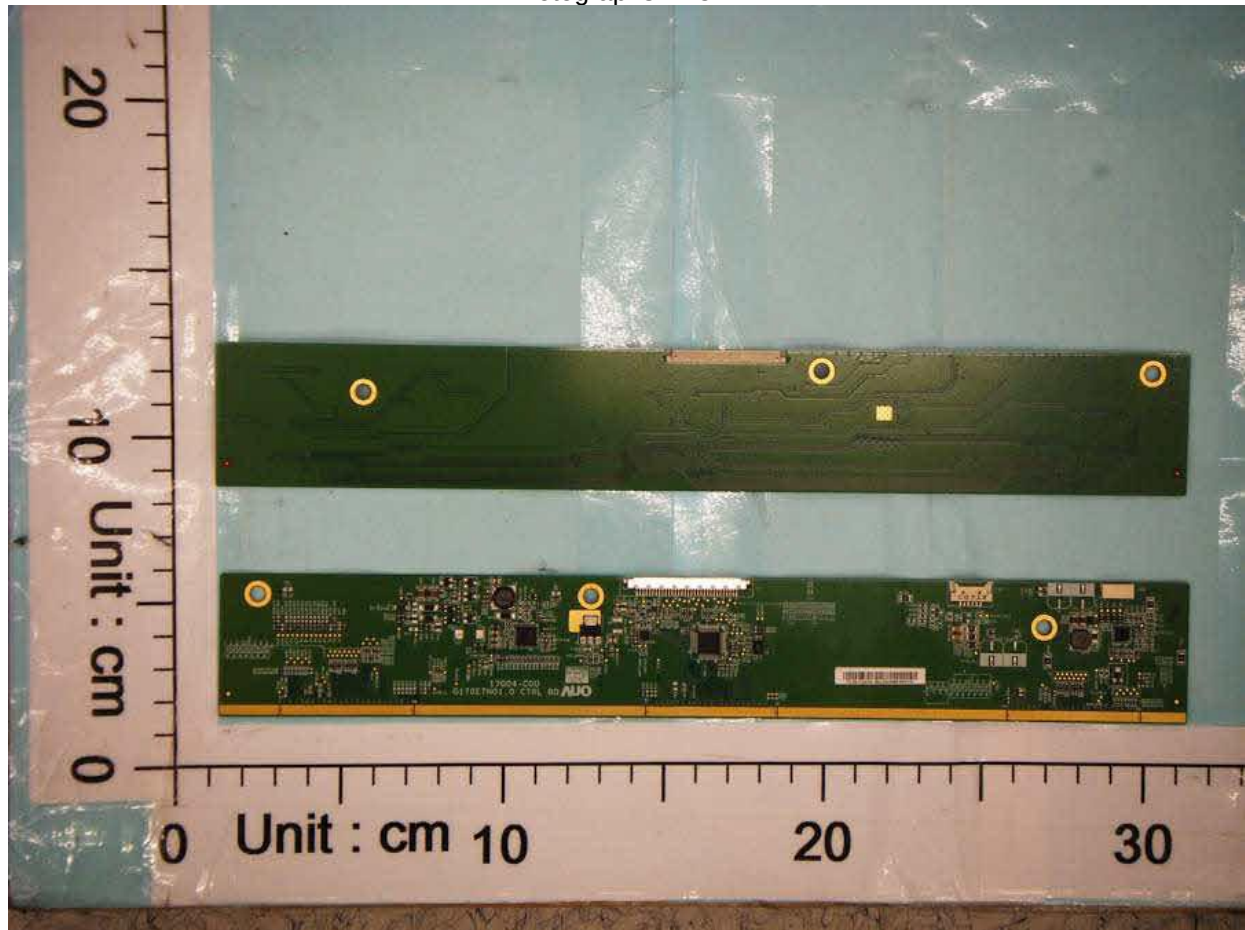


Photographs ID 3-12



Schematics ID 5-02

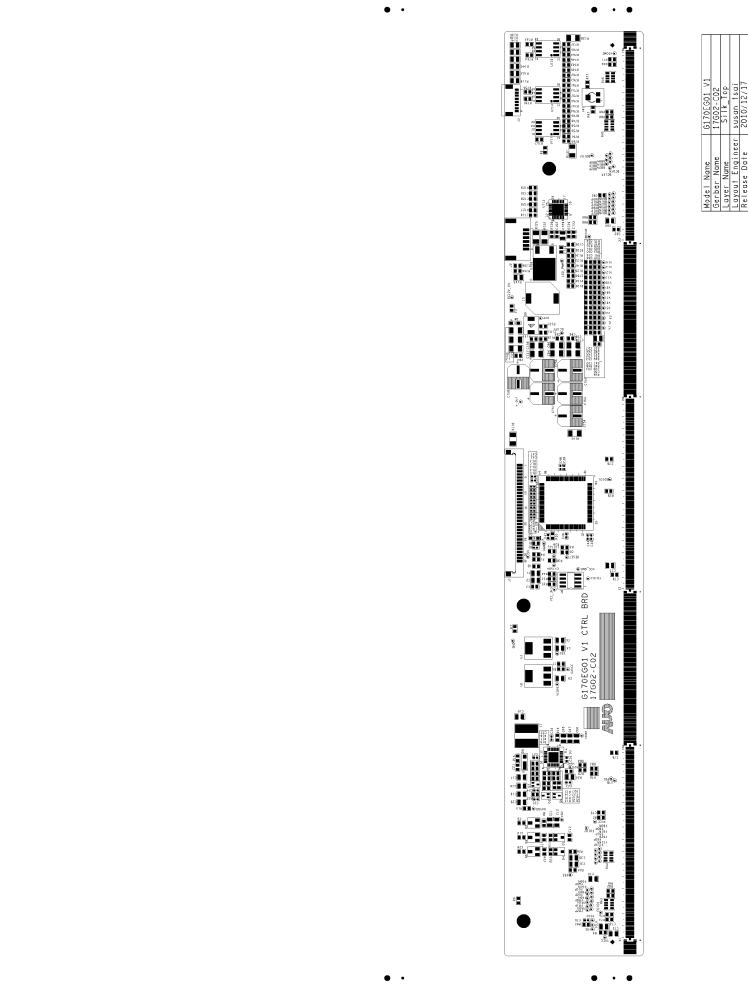

Schematics ID 5-03



Enclosures

Misc ID 7-03

CB TEST CERTIFICATE INFORMATION

Product	LCD Panel (LED Backlight)
Name and address of the Applicant	AU OPTRONICS CORP 1 LI-HSIN RD 2 HSINCHU SCIENCE PARK HSINCHU 300 TAIWAN
Name and address of the Manufacturer	AU OPTRONICS CORP. 1 LI-HSIN RD 2 HSINCHU SCIENCE PARK HSINCHU 300 TAIWAN
Name and address of the Factory(ies)	1) AU Optronics (Longke) Corporation No. 228, Longke St, Longtan Township, Taoyuan County 32542, Taiwan 2) AU Optronics (Taichung) Corporation 1, Jhong Ke Rd., Central Taiwan Science Park Taichung 407, Taiwan 3) AU Optronics (Suzhou) Corporation 398 Suhong Zhong Rd. Suzhou Industrial Park, Jiangsu 215021, P.R. China 4) AU Optronics (Xiamen) Corporation No.1689, North of Xiang'An Road, Xiang'An Branch Torch Hi-Tech Industrial Development Zone, Xiamen 361102, P.R. China 5) AU Optronics Manufacturing (Shanghai) Corp. No. 3, Ln 58, San-Zhuang Rd., Songjiang Export Processing Zone, Shanghai, P.R. China 6) Darwin Precisions (SZ) Corporation No. 11, Tingxin Street, Suzhou Industrial Park Suzhou 215021 P.R. China 7) FORTECH ELECTRONICS(SUZHOU) CO.,LTD No.399 jin Hu West Road ,WuJiang Economic Development JiangSu Province 215200, P.R. China 8) Qisda (Suzhou) Co., Ltd. No.169 Zhujiang Road, New District, Suzhou, Jiangsu 215129, P.R. China 9) FORTECH ELECTRONICS(KUNSHAN) CO.,LTD NO. 555, TongFeng East Rd., Economical exploitation area Kunshan City, Jiangsu Province 215334, P.R. China 10) Radiant Opto-Electronics (Suzhou) Co., Ltd No.1621, JiangXing East RD, Economic Developing Area, Wujiang Jiangsu 215011, P.R. China 11) DARWIN PRECISIONS (XIAMEN) CORP 3089 NORTH OF XIANG'AN RD XIANG'AN BRANCH TORCH HI-TECH

Enclosures

Misc ID 7-03

	INDUSTRIAL DEVELOPMENT ZONE XIAMEN FUJIAN 361102, P.R. China 12) Briview (Hefei) Corp. 176 YUNER RD HEFEI ECONOMIC & TECHNOLOGICAL DEVELOPMENT AREA, HEFEI ANHUI 230601, P.R. China 13) BriView (Xiamen) Corp. No. 1998, West of Fang Shan Road, Xiang An Branch, Torch Hi-tech Industrial Development Zone, XIAMEN P.R. China
Rating and principal characteristics	(optional) 1. 12Vdc, 1.29 A max. 2. 12Vdc, 1.1 A max.
Trademarks (if any)	AU Optronics
Model / Type ref.	G170EGZZ, G170ETNZZZZ (Z May be any alphanumeric character or blank for marketing purpose).
Additional information (if necessary)	--
A sample of the product was tested and found to be in conformity with	--
As shown in the Test Report Ref. No. which forms part of this Certificate	

Client Representative	Joan Chen
Client email (or fax)	Joan.Chen@auro.com

This form is to acknowledge that the above information has been reviewed and the material has been found to be accurate as stated. This is also to record client's confirmation that above factories manufacture product(s) that are equal to those submitted for testing and certification. (Refer to IEC 60950-1, Sub-clause 6.2.5: "When the application covers more than one factory, the address of each factory shall be stated in the CB Test Certificate and the NCB shall take steps to ensure that the products from all the factories are equal. That shall be confirmed in the Test Report.")

Signed:



Dated: 2013/05/02

*Definitions per IEC 60950-1 (<http://www.iec60950.com/cbscheme/pdf/IEC60950-1.pdf>):

Applicant: A firm or a person who applies to an NCB for obtaining a CB Test Certificate.

Manufacturer: An organization, situated at a stated location or locations, that carries out or controls such stages in the manufacture, assessment, handling and storage of a product that enables it to accept responsibility for continued compliance of the product with the relevant requirements and undertakes all obligations in that connection.

Factory: The location(s) at which the product is produced or assembled and follow-up service is established by the NCB.

Enclosures

Misc ID 7-04

TEST INSTRUMENTS REFERENCE LIST

Instr. Code	Instrument I.D.	Instrument Type	Range Used Or ***	Make and Model **	Calibration Date	
					Last	Due
#1	EI905214	DC power supply	V: Max 30V A: Max 12A	GW/ GPC-3060D	2013-03-20	2014-03-19
#2	B041079	Oscilloscope	V: Max 2.5KV Scale: 1M Ω	TEKTRONIX/ TDS3012B	2012-08-23	2013-08-22
#3	EI853179	DC power supply	V: Max 30V A: Max 12A	GW/ GPC-3060D	2012-09-24	2013-09-23
#4	91K136236	Temperature Recorder	Temperature: Max 200°C	YOKOGAWA/ MX100-E-1D	2013-03-07	2014-03-06
#5	809Q07R	Stop Watch	0-5000sec	CASIO/HS-80TW	2012-09-14	2013-09-13