



PROPRIETARY NOTE

THIS SPECIFICATION IS THE PROPERTY OF BOE DT AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF BOE DT AND MUST BE RETURNED TO BOE DT UPON ITS REQUEST

TITLE : MV315QUM-N20

Preliminary Product Specification Ver. P1

FUZHOU BOE OPTOELECTRONICS CO., LTD

SPEC. NUMBER	PRODUCT GROUP TFT-LCD	Ver. P1	ISSUE DATE 2019.11.05	PAGE 1 OF 27
--------------	--------------------------	---------	--------------------------	-----------------



BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	Rev. P1	2019.08.05

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	Rev. P1	2019.08.05

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	Rev. P1	2019.08.05

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	Rev. P1	2019.08.05

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	Rev. P1	2019.08.05

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	Rev. P1	2019.08.05

REVISION HISTORY	
------------------	--

[illegible][illegible]

SPEC. NUMBER	SPEC. TITLE MV315QUM-N20 Specification Rev. P0	PAGE 2 OF 27
--------------	---	-----------------

SPEC. NUMBER	SPEC. TITLE MV315QUM-N20 Specification Rev. P0	PAGE 2 OF 27
--------------	---	-----------------

SPEC. NUMBER	SPEC. TITLE MV315QUM-N20 Specification Rev. P0	PAGE 2 OF 27
--------------	---	-----------------

SPEC. NUMBER	SPEC. TITLE MV315QUM-N20 Specification Rev. P0	PAGE 2 OF 27
--------------	---	-----------------

SPEC. NUMBER	SPEC. TITLE MV315QUM-N20 Specification Rev. P0	PAGE 2 OF 27
--------------	---	-----------------


Contents

No.	Item	Page
1.0	General Description	4~5
2.0	Absolute Maximum Ratings	6
3.0	Electrical Specifications	7~8
4.0	Optical Specifications	9~10
5.0	Interface Connection	11~15
6.0	Signal Timing Interface	16~17
7.0	Signal Timing Waveforms of Interface Signal	18
8.0	Power Sequence	19~20
9.0	Mechanical Characteristics	21
10.0	Reliability Test	22
11.0	Handling& Cautions	23
12.0	Product Serial Number	24
13.0	Packing	25~26
14.0	Appendix	27~30

1.0 GENERAL DESCRIPTION

1.1 Introduction

MV315QUM-N20 is a color active matrix TFT LCD module using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This module has a 31.5 inch diagonally measured active area with UHD resolutions (3840 horizontal by 2160 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical stripe and this module can display 1.07B colors. The TFT-LCD panel used for this module is adapted for a low reflection and higher color type.

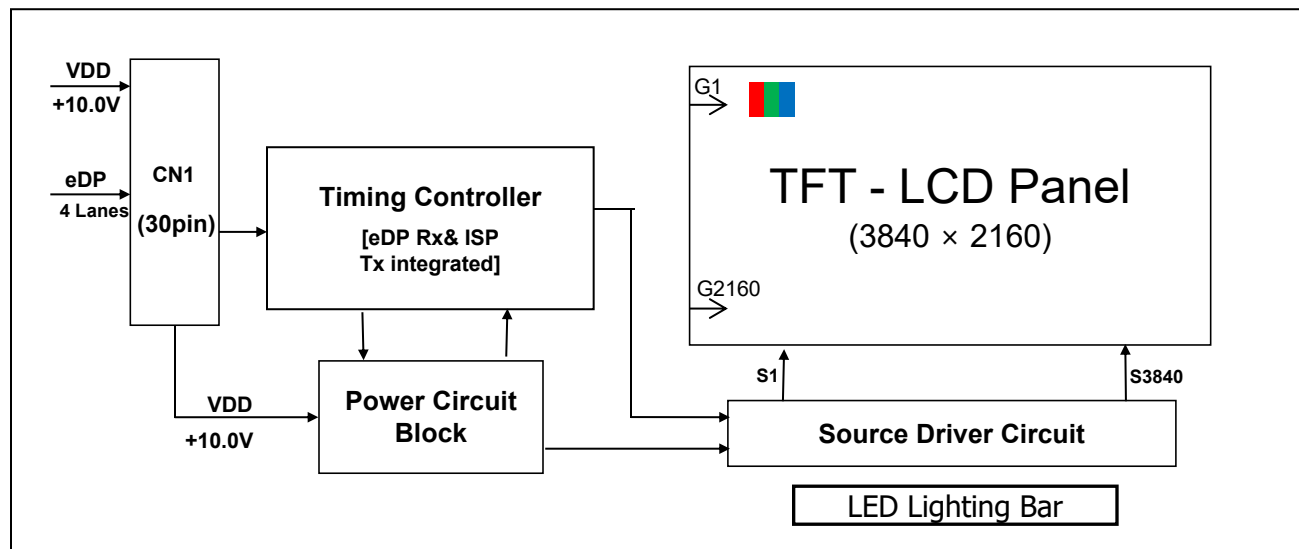

1.2 Features

- Reverse Type
- 4 lane eDP Interface with 5.4Gbps Link Rates
- 10bit (8bit+A-FRC) color depth, display 1.07B colors
- Incorporated edge type back-light (LED)
- Compatible with sRGB Matching Ratio 100%(Typ.) 98%(Min.),@CIE 1931
- Compatible with DCI-P3 94%(Typ.)90%(Min.)@CIE1931, 95%(Typ.)90%(Min.)@CIE1976
- High luminance and contrast ratio, low reflection and wide viewing angle
- DE (Data Enable) only
- RoHS/Halogen Free
- ES7.0/TCO8.0 compliant
- Gamma Correction

1.3 Application

- Desktop Type of PC & Workstation Use
- Slim-Size Display for Stand-alone Monitor
- Display Terminals for Control System
- Monitors for Process Controller

1.4 General Specification

The followings are general specifications at the model MV315QUM-N20.

<Table 1. General Specifications>

Parameter	Specification	Unit	Remarks
Active area	697.3056(H) × 392.2344 (V)	mm	
Active Screen Size	31.5 inches	cm	
Number of pixels	3840(H) × 2160 (V)	pixels	
Pixel pitch	0.18159(H) × 0.18159(V)	mm	
Pixel arrangement	RGB Vertical stripe		
Color Depth	1.07B (10Bit)	colors	8bit+FRC
Display mode	Normally Black		
Dimensional outline	709.4(H) × 412(V) × 14.7 (D) typ.	mm	
Weight	4550	g	
Power Consumption	43.2	W	
AA~Outline (L/R/U/D)	6.0472/6.0472/5.5/14.2656	mm	
Surface Treatment	高精细Haze 25%, 3H		
Back-light	Horizontal arranged, 2-LED Light bar Type		

2.0 ABSOLUTE MAXIMUM RATINGS

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.

< Table 2. Absolute Maximum Ratings >


[VSS=GND=0V]

Parameter	Symbol	Min.	Max.	Unit	Remarks
Power Supply Voltage	V_{DD}	GND-0.3	12	V	Ta = 25 °C
Logic Supply Voltage	V_{IN}	VSS-0.3	$V_{DD}+0.3$	V	
Operating Temperature	T_{OP}	0	+50	°C	1)
Storage Temperature	T_{ST}	-20	+60	°C	1)
LCM Surface Temperature (Operation)	$T_{Surface}$	0	+65	°C	2)

Note : 1) Temperature and relative humidity range are shown in the figure below.

Wet bulb temperature should be 39 °C max. and no condensation of water.

2) Panel Surface Temperature should be Min. 0°C and Max. +65°C under the VDD = 10.0V, Frame rate = 60Hz, 25°C ambient Temp. no humidity control and LED string current is typical value.

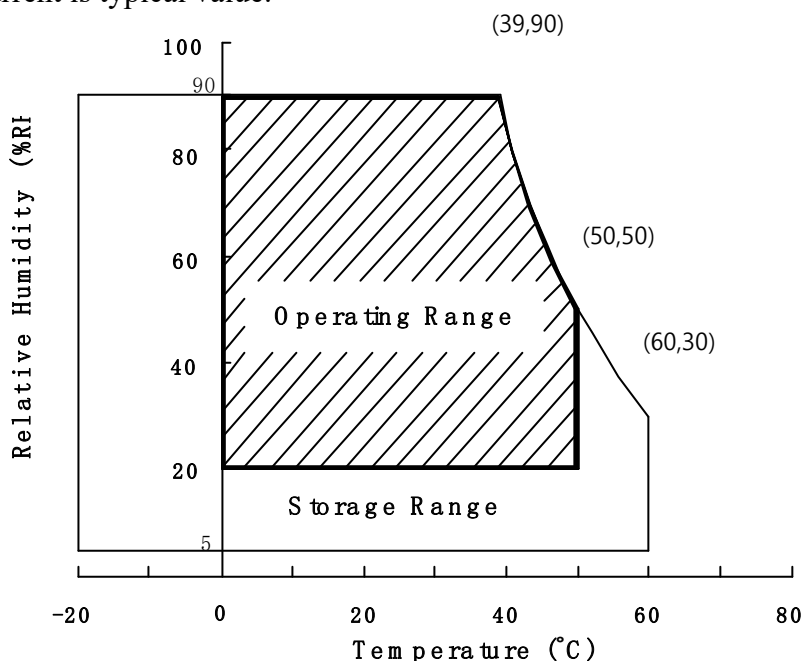

3.0 ELECTRICAL SPECIFICATIONS

3.1 Electrical Specifications

< Table 3. Electrical specifications >

[Ta =25±2 °C]

Parameter		Min.	Typ.	Max.	Unit	Remarks
Power Supply Voltage	V _{DD}	9.5	10.0	10.5	V	Note1
Power Supply Current	I _{DD}	-	800	1700	mA	
In-Rush Current	I _{RUSH}	-	2.0	3.0	A	Note 2
Permissible Input Ripple Voltage	V _{RF}	-	-	400	mV	Note1,3
Differential input voltage	V _{ID}	100	-	600	mV	
Differential input common mode voltage	V _{cm}	0	-	2	V	V _{IH} =100mV, V _{IL} =-100mV
Power Consumption	P _D	-	8	17	W	
	P _{BL}	-	35.2	36.3	W	
	P _{total}	-	43.2	53.3	W	


Notes : 1. The supply voltage is measured and specified at the interface connector of LCM.

The current draw and power consumption specified is for VDD=10.0V, Frame rate=60Hz ,

Test Pattern of power supply current

a) Typ : Mosaic Pattern

b) Max : **Vertical Subline**



(a)



(b)

2. Duration of rush current is about 2 ms and rising time of VDD is 520 μs ± 20 %

3. Ripple Voltage should be covered by Input voltage Spec.

4. Calculated value for reference (Input pins*VPIN ×IPIN) excluding inverter loss.

3.0 ELECTRICAL SPECIFICATIONS

3.2 Backlight Unit

< Table 3. Backlight Unit Electrical Specifications >

[Ta =25±2 °C]

Parameter		Min.	Typ.	Max.	Unit	Remarks
LED Light Bar Input Voltage Per Input Pin	VPIN	-	35.2	36.3	V	Duty 100%
LED Light Bar Input Current Per Input Pin	IPIN	-	125	130	mA	Note1,2,
LED Power Consumption	P _{BL}		35.2	36.3	W	Note 3
LED Life-Time	-	30,000	-		Hrs	Note 4

LED bar consists of 88LED packages, 2 light bars*4 strings(parallel)*11packages(serial)

Note1: There are two light bar ,and the specified current is input LED chip 100% duty current

Note2: The sense current of each input pin is 125mA

Note3: PBL=2*4 Input pins*VPIN ×IPIN

Note4: The lifetime is determined as the time at which luminance of LED become 50% of the initial brightness or not normal lighting at IPIN=125mA on condition of continuous operating at 25 ±2 °C

4.0 OPTICAL SPECIFICATION

4.1 Overview

The test of Optical specifications shall be measured in a dark room (ambient luminance ≤ 1 lux and temperature = $25 \pm 2^\circ\text{C}$) with the equipment of Luminance meter system (Goniometer system and TOPCONE PR730) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of θ and Φ equal to 0° . We refer to $\theta_{0=0}$ ($=\theta_3$) as the 3 o'clock direction (the "right"), $\theta_{0=90}$ ($=\theta_{12}$) as the 12 o'clock direction ("upward"), $\theta_{0=180}$ ($=\theta_9$) as the 9 o'clock direction ("left") and $\theta_{0=270}$ ($=\theta_6$) as the 6 o'clock direction ("bottom"). While scanning θ and/or Φ , the center of the measuring spot on the Display surface shall stay fixed. The measurement shall be executed after 30 minutes warm-up period. VDD shall be 10.0V $\pm 10\%$ at 25°C . Optimum viewing angle direction is 6 o'clock.

4.2 Optical Specifications

[VDD = 10.0V, Frame rate = 60Hz, Clock = 533MHz, IBL = 2*500mA, , Ta = $25 \pm 2^\circ\text{C}$]

< Table 5. Module Optical >

Parameter		Symbol	Condition	Min	Typ	Max	Unit	Remark
Viewing Angle	Horizontal	Θ_3	CR > 10	85	89		Deg.	Note 1
		Θ_9		85	89		Deg.	
	Vertical	Θ_{12}		85	89		Deg.	
		Θ_6		85	89		Deg.	
Luminance Contrast ratio		CR	$\Theta = 0^\circ$	700:1	1000:1	-		Note 2
Luminance of White		Lv	$\Theta = 0^\circ$ I _{LED} =125mA	280	350		nit	Note 3
White luminance uniformity		ΔY_9		75%				Note 4
Reproduction of color	White	W_x	$\Theta = 0^\circ$ (Center) Normal Viewing Angle	TYP. - 0.03	0.313	TYP. + 0.03		Note 5 (参考値)
		W_y			0.329			
	Red	R_x			0.681			
		R_y			0.312			
	Green	G_x			0.268			
		G_y			0.663			
	Blue	B_x			0.150			
		B_y			0.049			
	Color Gamut				-		100%	
Response Time	G to G	T _g	-	14	20	ms	Note 6	
Gamma Scale				2.0	2.2	2.4		

Note :

1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface.
2. Contrast measurements shall be made at viewing angle of $\theta = 0^\circ$ and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state. (See FIGURE 1 shown in Appendix) Luminance Contrast Ratio (CR) is defined mathematically.

$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$


3. Center Luminance of white is defined as the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.
4. The White luminance uniformity on LCD surface is then expressed as :
 $\Delta Y = (\text{Minimum Luminance of 9points} / \text{Maximum Luminance of 9points}) * 100$
 (See FIGURE 2 shown in Appendix).
5. The color chromaticity coordinates specified in Table 5. shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.
6. Response time Tg is the average time required for display transition by switching the input signal as below table and is based on Frame rate fV =60Hz to optimize.
 Each time in below table is defined as appendix Figure 3 and shall be measured by switching the input signal for “any level of gray(bright)”and “any level of gray(dark)”
7. Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (Y_A) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (Y_B) of that same area when any adjacent area is driven dark. (See FIGURE 4 shown in Appendix).

5.1.1 LED Light Bar

-LED connector: 3707K-S06N-21R or EQUIVALENT

< Table 6. LED Light Bar >

Pin No	Symbol	Description
1	IRLED1	LED current sense for string1
2	IRLED2	LED current sense for string2
3	VLED	LED power supply
4	VLED	LED power supply
5	IRLED3	LED current sense for string3
6	IRLED4	LED current sense for string4
7	IRLED5	LED current sense for string1
8	IRLED6	LED current sense for string2
9	VLED	LED power supply
10	VLED	LED power supply
11	IRLED7	LED current sense for string3
12	IRLED8	LED current sense for string4

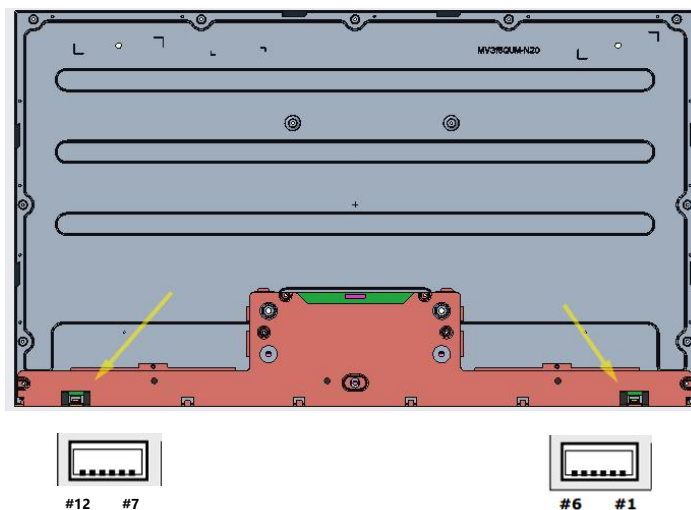

5.0 INTERFACE CONNECTION.


5.2 Electrical Interface Connection

- CN1 Module Side Connector : STM MSAK24025P30.

Pin No	Symbol	Function	Remark
1	VDD	Power Supply (10.0V)	
2	VDD	Power Supply (10.0V)	
3	VDD	Power Supply (10.0V)	
4	VDD	Power Supply (10.0V)	
5	VDD	Power Supply (10.0V)	
6	NC	No connection	
7	GND	Ground	
8	NC	No connection	
9	NC	No connection	
10	GND	Ground	
11	HPD	Hot Plug Detection Signal	
12	GND	Ground	
13	DAUXN	Negative Signal for Auxiliary Chanel	
14	DAUXP	Positive Signal for Auxiliary Chanel	
15	GND	Ground	
16	DRX0P	Positive Signal For eDP Lane0	
17	DRX0N	Negative Signal For eDP Lane0	
18	GND	Ground	
19	DRX1P	Positive Signal For eDP Lane1	
20	DRX1N	Negative Signal For eDP Lane1	
21	GND	Ground	
22	DRX2P	Positive Signal For eDP Lane2	
23	DRX2N	Negative Signal For eDP Lane2	
24	GND	Ground	
25	DRX3P	Positive Signal For eDP Lane3	
26	DRX3N	Negative Signal For eDP Lane3	
27	GND	Ground	
28	NC	No connection	
29	NC	No connection	
30	NC	No connection	Reserved for BIST Function

5.3 eDP Interface

- eDP Data Transport Channels

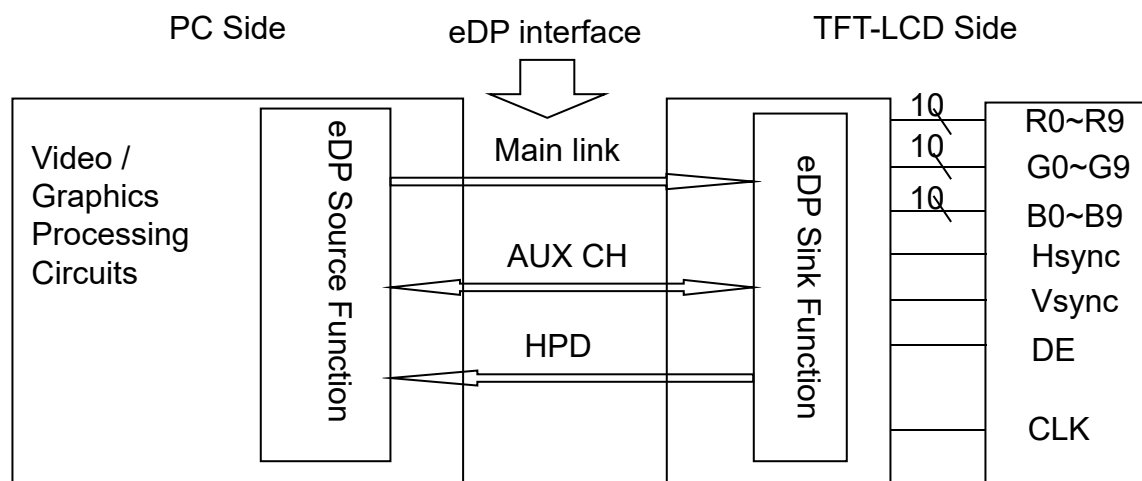


BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	Rev. P1	2019.11.05

5.4 eDP Rx Interface Timing Parameter

5.4.1 Main link Signal


Item	Symbols	Min	Typ	Max	Unit	Remark
Spread spectrum clock	SSC	-0.5	-	+0.5	%	
Main link swing voltage	$ V_{ID} $	100	-	600	mv	
Main link common mode voltage	V_{IC}	0	-	2.0	V	

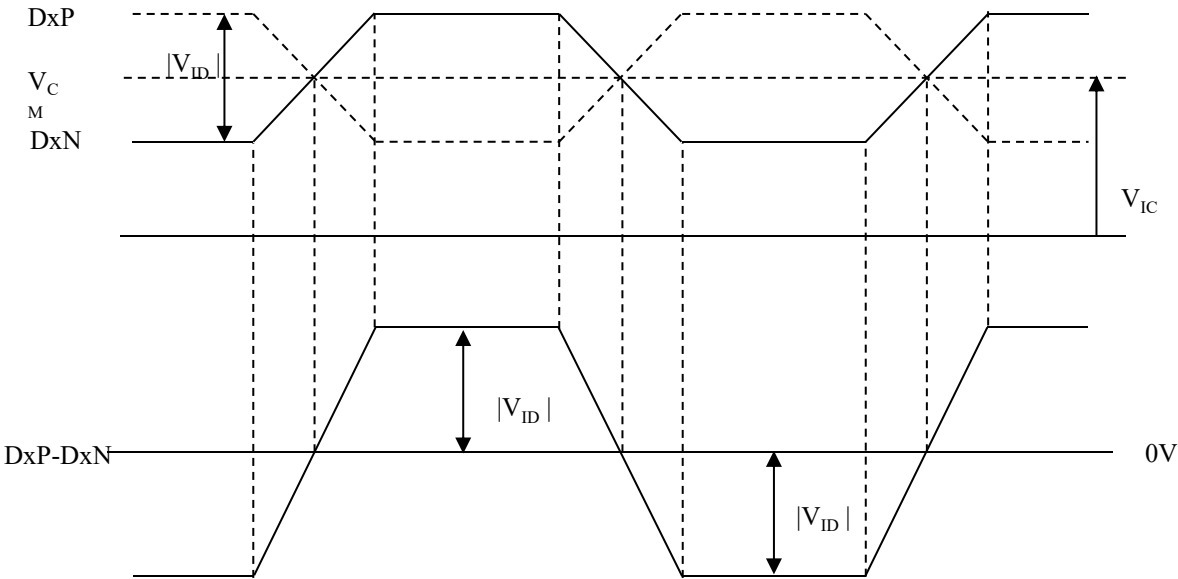

SPEC. NUMBER	SPEC. TITLE	PAGE
R2015-8006-O	MV315QUM-N20 Preliminary Product Specification Rev. P1	14 OF 28

5.4.2 AUX_CH Signal

Item	Symbols	Min	Typ	Max	Unit	Remark
AUX swing voltage	$ V_{ID_AUX} $	100	-	600	mv	
AUX common mode voltage	V_{IC_AUX}	0	-	1.2	V	

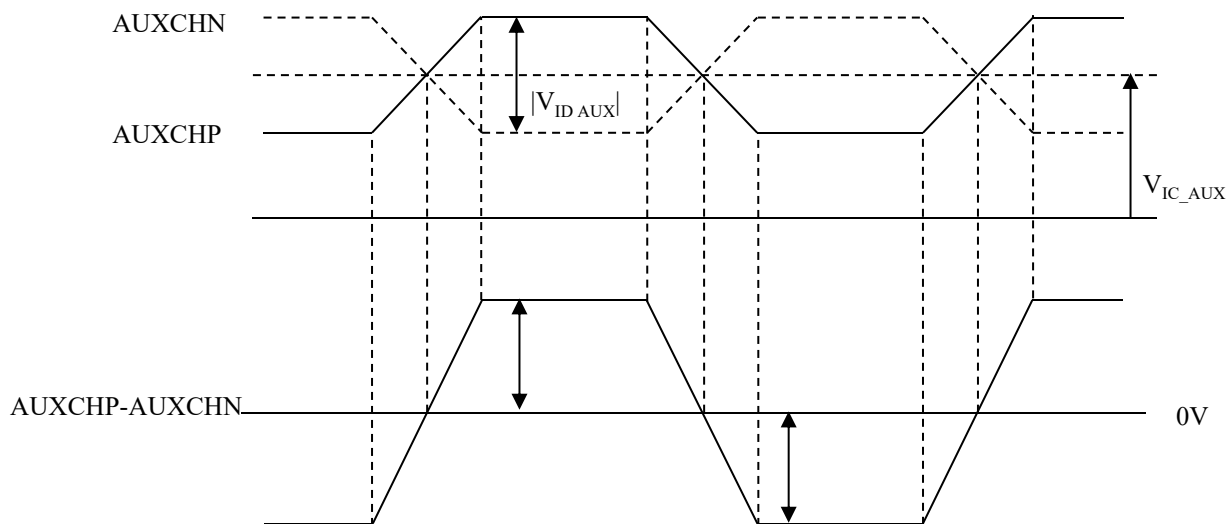

5.4.3 HDP Signal

Item	Symbols	Min	Typ	Max	Unit	Remark
HPD Voltage	VHPD	2.25	-	3.6	V	

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	Rev. P1	2019.11.05

6.0 SIGNAL TIMING SPECIFICATION

6.1 The MV315QUM-N10 is operated by the DE only.

Item	Symbols		Min	Typ	Max	Unit	Note
DCLK	Period	tCLK	1.8	1.87	2.3	ns	
	Frequency	-	444	533	543	MHz	
Hsync	Period	tHP	3950	4000	4088	tCLK	
	Horizontal Valid	tHV	3840			tCLK	
	Horizontal Blank	tHB	110	160	248	tCLK	
	Frequency	fH	111	133.3	135	KHz	
Vsync	Period	tVP	2213	2222	2290	tHP	
	Vertical Valid	tVV	2160			tHP	
	Vertical Blank	tVB	53	62	130	tHP	
	Frequency	fV	50	60	61	Hz	Adaptive Sync :40-60Hz


SPEC. NUMBER	SPEC. TITLE MV315QUM-N20 Preliminary Product Specification Rev. P1	PAGE 16 OF 28
--------------	---	------------------

7.0 INPUT SIGNALS, BASIC DISPLAY COLORS & GRAY SCALE OF COLORS

Color	Gray Level	RED										GREEN										BLUE									
		R9	R8	R7	R6	R5	R4	R3	R2	R1	R0	G9	G8	G7	G6	G5	G4	G3	G2	G1	G0	B9	B8	B7	B6	B5	B4	B3	B2	B1	B0
Black	-	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
White	-	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
L511	-	0	1	1	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	1	1
Red	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
Green	1023	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
Blue	1023	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0
	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
Blue	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
	1023	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

8.0 POWER SEQUENCE

VDD power,eDP signal and backlight on/off sequence are as following. eDP signals from any system shall be Hi-Z state when VDD is off.

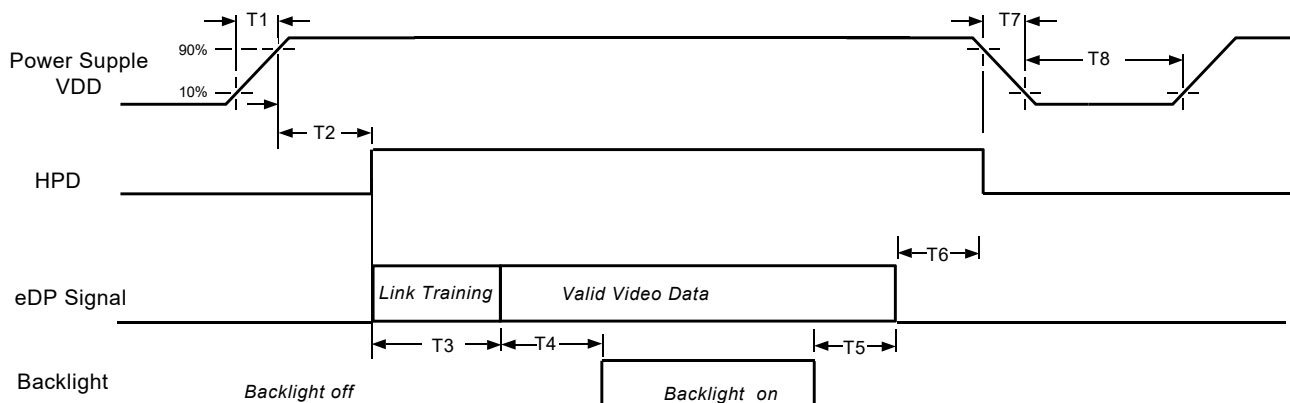

Timing Parameter	Value			Remarks
	Min.	Typ.	Max.	
T1	0.5ms	-	10ms	
T2	0ms	-	200ms	
T3	0ms	-	-	During T3 Period, eDP link training time by customer's system.
T4	500ms	-	-	
T5	100ms	-	-	
T6	0ms	-	50ms	Recommend setting T6=0ms to avoid electronic noise when VDD is off. During T6 period, please keep the level of input eDP signals with Hi-Z state.
T7	0ms	-	200ms	T7 decreases smoothly, there is none re-bouncing voltage.
T8	1000ms	-	-	

Notes:

1. When the power supply VDD is 0V, keep the level of input signals on the low or keep high impedance.
2. Do not keep the interface signal high impedance when power is on.
3. Back Light must be turn on after power for logic and interface signal are valid.

9.0 MECHANICAL CHARACTERISTICS

9.1 Dimensional Requirements

FIGURE 6 (located in Appendix) shows mechanical outlines for the model MV315QUM-N10. Other parameters are shown in Table 8.

<Table 8. Dimensional Parameters>

Parameter	Specification	Unit
Dimensional outline	709.4(H) × 412(V) × 14.7(Typ)	mm
Weight	4550	gram
Active area	697.3056(H) × 392.2344 (V)	mm
Pixel pitch	0.18159(H) × 0.18159(V)	mm
Number of pixels	3840(H)×2160 (V) (1 pixel = R + G + B dots)	pixels
Back-light	Horizontal arranged, 2-LED Light bar Type	

9.2 Anti-Glare and Polarizer Hardness.

The surface of the LCD has an anti-glare coating to minimize reflection and a coating to reduce scratching.

10.0 RELIABILITY TEST

The Reliability test items and its conditions are shown in below.

<Table 9 Reliability Test Parameters >

No	Test Items	Conditions	
1	High temperature storage test	Ta = 60 °C, 240 hrs	
2	Low temperature storage test	Ta = -20 °C, 240 hrs	
3	High temperature & high humidity operation test	Ta = 60 °C, 90%RH, 240hrs	
4	High temperature operation test	Ta = 50 °C, 240hrs	
5	Low temperature operation test	Ta = 0°C, 240hrs	
6	Thermal shock	Ta = -20 °C ↔ 60 °C (0.5 hr), 100 cycle	
7	Packing Vibration test (non-operating)	Frequency	Random, 1 ~ 200 Hz, 30 min/Axis
		Gravity / AMP	1.2 Grms
		Period	X, Y, Z 30 min
8	Shock test (non-operating)	Gravity	50G
		Pulse width	11msec, Half sine wave
		Direction	±X, ±Y, ±Z Once for each
9	Electro-static discharge test	Air : 150 pF, 330Ω, 15 KV Contact : 150 pF, 330Ω, 8 KV	

11.0 HANDLING & CAUTIONS

(1) Cautions when taking out the module

- Pick the pouch only, when taking out module from a shipping package.

(2) Cautions for handling the module

- As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
- As the LCD panel and back - light element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
- As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
- Do not pull the interface connector in or out while the LCD module is operating.
- Put the module display side down on a flat horizontal plane.
- Handle connectors and cables with care.

(3) Cautions for the operation

- When the module is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the LCD panel would be damaged.
- Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.

(4) Cautions for the atmosphere

- Dew drop atmosphere should be avoided.
- Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended.

(5) Cautions for the module characteristics

- Do not apply fixed pattern data signal to the LCD module at product aging.
- Applying fixed pattern for a long time may cause image sticking.

(6) Other cautions

- Do not disassemble and/or re-assemble LCD module.
- Do not re-adjust variable resistor or switch etc.
- When returning the module for repair or etc., Please pack the module not to be broken. We recommend to use the original shipping packages.


10.0 PACKING INFORMATION

BOE provides the standard shipping container for customers, unless customer specifies their packing information. The standard packing method and Barcode information are shown in below.


10.1 Packing Order




1. Put one MDL in the PE bag (PCB ↓) .





2. Put 8pcs MDL in the EPO Box.




3. Put one EPO Cover.
Total: 8pcs MDL



4. Put 3/6 EPO Box on the pallet.



5. Put the Top-Cover on the Box
(24/48ea MDLs per pallet) and Pack
with 4 packing belts.



装厢方式: 双层码放, 共56托
底层: 6Box/Pallet (3*2, 双层Box)
上层: 3Box/Pallet (3, 单层Box)

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	Rev. P1	2019.11.05

12.0 PRODUCT SERIAL NUMBER

XXXXXX-XXX

BA

XXXX

XXXXXXXXXXXXXXXXXXXX

P/N:XXXXXXXXXX FRU:XXXXXXXXXX

8SXXXXXXXXXXB1FZXXXXXXXX

BOE

eco
RoHS Compliant



MADE IN CHINA

FG-Code

MDL ID

MDL ID Naming Rule:

Digit	1	2	3	4	5	6						7					
Code	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
Des.	1. Model Code GBN 2. Grade 3. Line 4. Year(2016:16, 2017:17, ...) 5. Month(1, 2, 3, ..., 9, X, Y, Z) 6. Model Extension Code 7. Serial Number																

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	Rev. P1	2019.11.05

10.2 Packing Note

- Box Dimension : 810mm(L)×376mm(W)×524mm(H)
- Package Quantity in one Box : 8pcs

10.3 Box Label

- Label Size : 100 mm (L) × 50 mm (W)
 - Contents
- Model :
- Q`ty : Module 8 Q`ty in one box
- Serial No. : Box Serial No.
- Date : Packing Date



FUZHOU BOE OPTOELECTRONICS
TECHNOLOGY Co.,LTD

MODEL: XXXXXXXXX-XXX
Q'TY: XXX

SERIAL NO: XXXXXXXXXXXXXXXX
DATE: XXXX.XX.XX





XXXXXXXXXXXXXXXX
XXXXXX

RoHS Mark

Internal CODE

Digit	1		2	3	4		5	6	7				
Code	x	x	x	x	x	x	x	x	x	x	x	x	x
Des.	1. Model Code GBN 2. Grade 3. Line 4. Year(2016:16, 2017:17, ...) 5. Month(1, 2, 3, ..., 9, X, Y, Z) 6. Revision Code 7. Serial Number												

SPEC. NUMBER	SPEC. TITLE MV315QUM-N20 Preliminary Product Specification Rev. P1	PAGE 24 OF 28
--------------	---	------------------

14.0 APPENDIX

Figure 1. Measurement Set Up

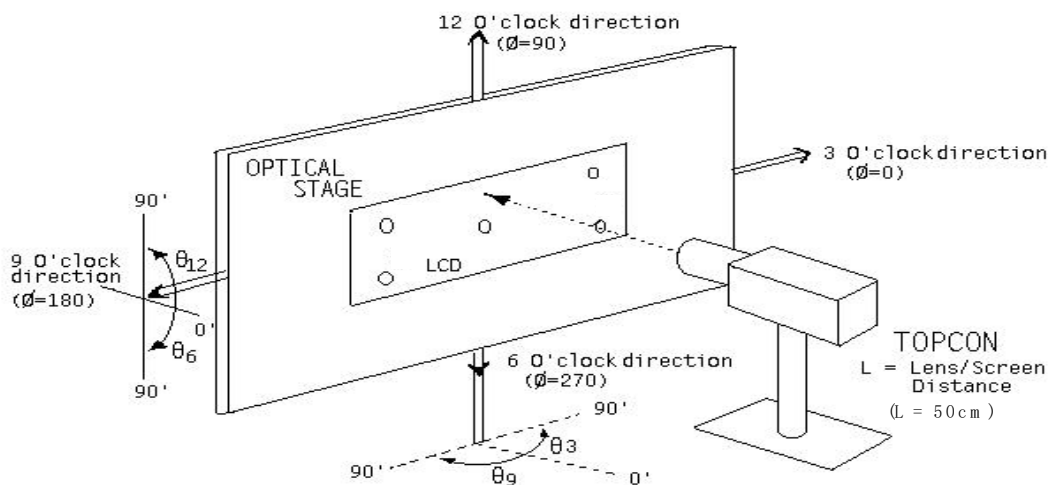


Figure 2. White Luminance and Uniformity Measurement Locations (9 points)

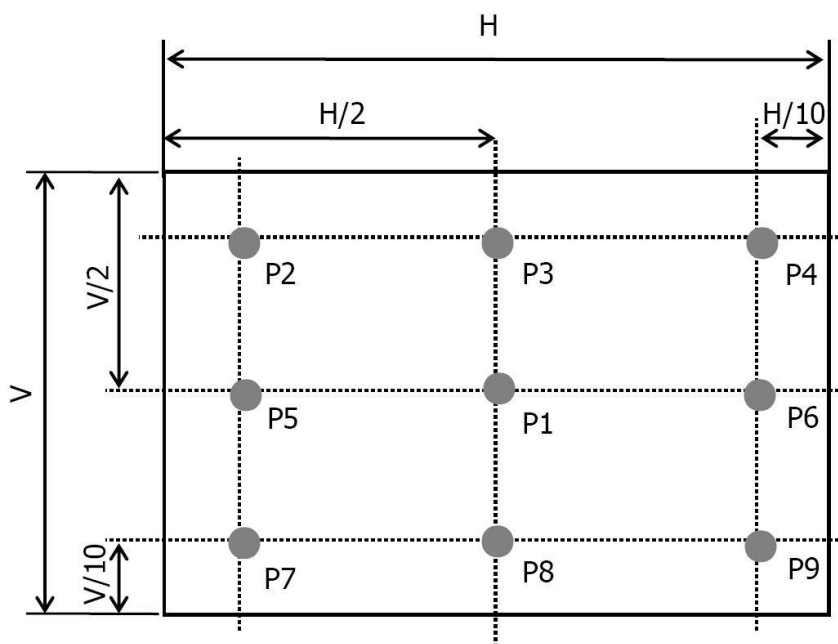


Figure 3. Response Time Testing


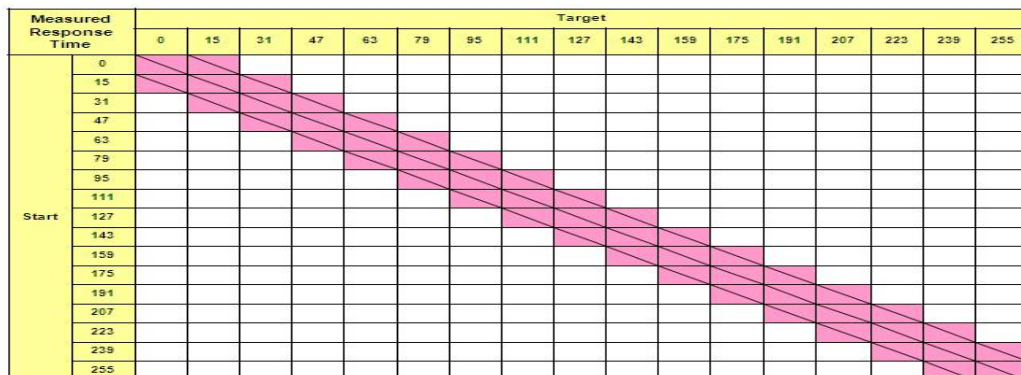


Figure 4. Cross Modulation Test Description

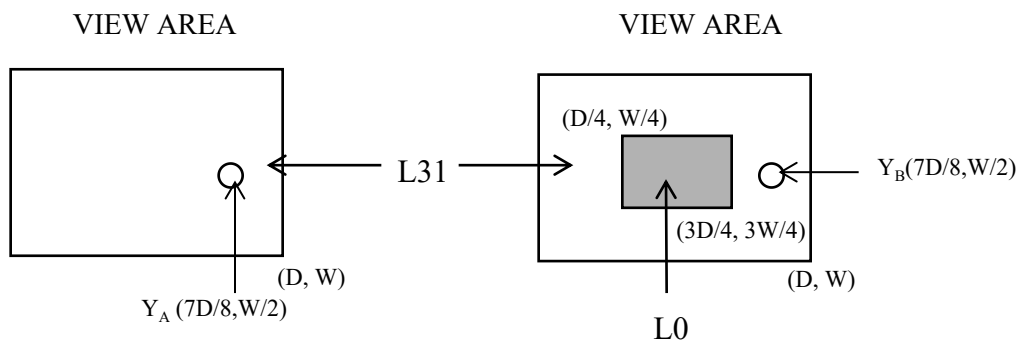


$$\text{Cross-Talk (\%)} = \left| \frac{Y_B - Y_A}{Y_A} \right| \times 100$$

Where: Y_A = Initial luminance of measured area (cd/m^2)

$$Y_B = \text{Subsequent luminance of measured area (cd/m}^2\text{)}$$

The location measured will be exactly the same in both patterns

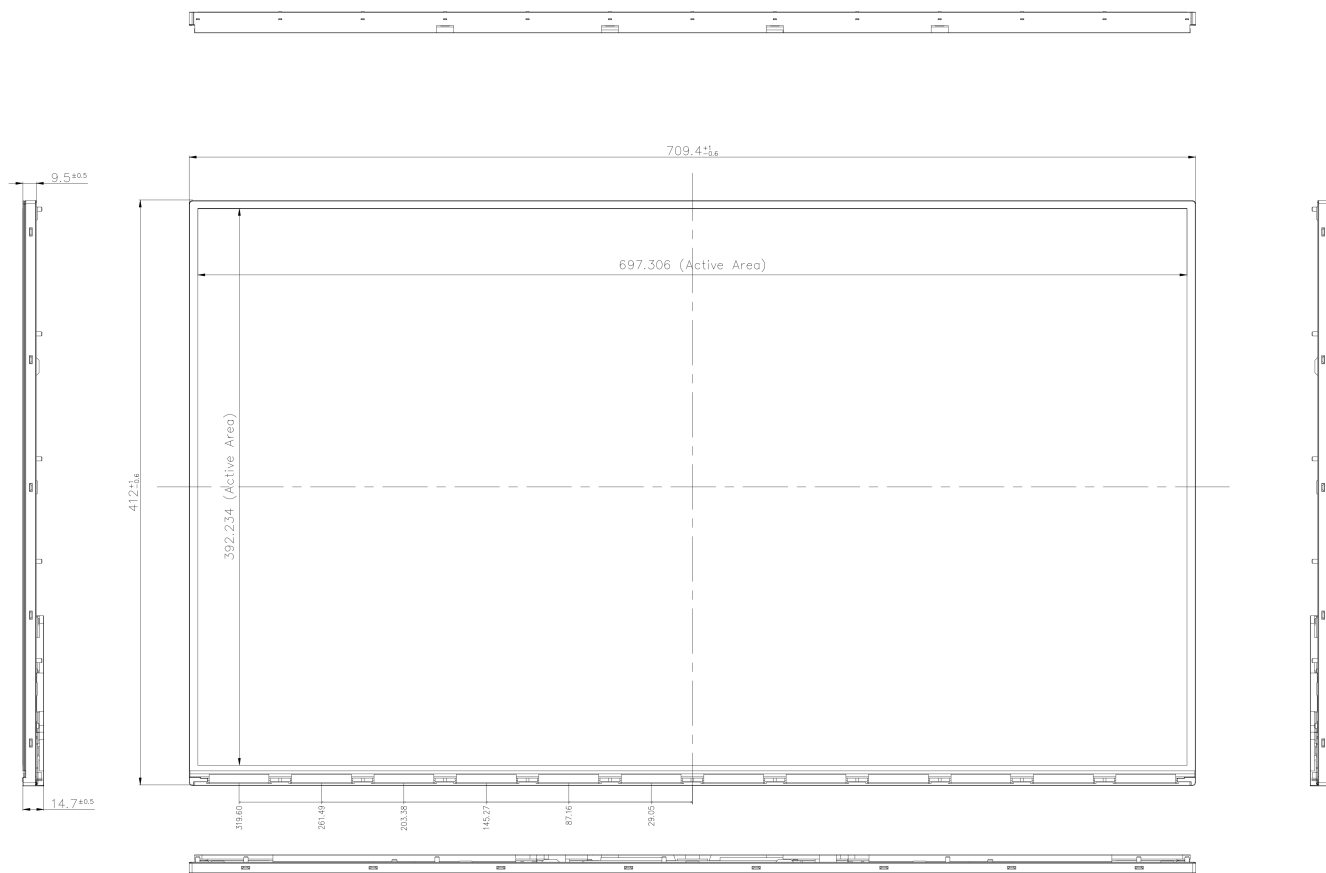Figure 5. TFT-LCD Module Outline Dimensions (Front & Side view)

NOTE:

1. I/F CONNECTOR SPECIFICATION


CNT1: IS050-C41B-C39-S

CNT2: IS050-C51B-C39-S

2. LED CONNECTOR SPECIFICATION

CNT3: BM06B-SHJS or EQUIVALENT

3. Tilt and portial disposition tolerance of display area as following

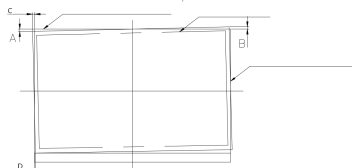(1) Y-direction: $-0.45 \leq A \leq 0.45, -0.45 \leq B \leq 0.45$ (2) X-direction: $-0.45 \leq C \leq 0.45, -0.45 \leq D \leq 0.45$ 4. Unspecified tolerance to be ± 0.5

5. The LCM warp is less than 1.0 on the surface plate

6. The COF area is weak and sensitive, so please don't press the COF area

